

**Simulations for the campaign of
AGATA at GSI
(brief summary on geometry aspects)**

César Domingo Pardo

GSI Helmholtzzentrum für Schwerionenforschung

Outline


- Summary about previous status
- Geometries: shell and compact setups
- Performance comparison
- Viability of additional γ -ray detectors: RISING, HECTOR, etc
- Gain in performance from 10 to 12 Clusters
- Outlook and conclusion

Outline

- Particular constraints for the setup at GSI
- Geometries: shell and compact setups
- Performance comparison
- Viability of additional γ -ray detectors: RISING, HECTOR, etc
- Gain in performance from 10 to 12 Clusters
- Outlook and conclusion

Particular constraints for the setup at GSI

- Ideal geometry (first approach, first step)

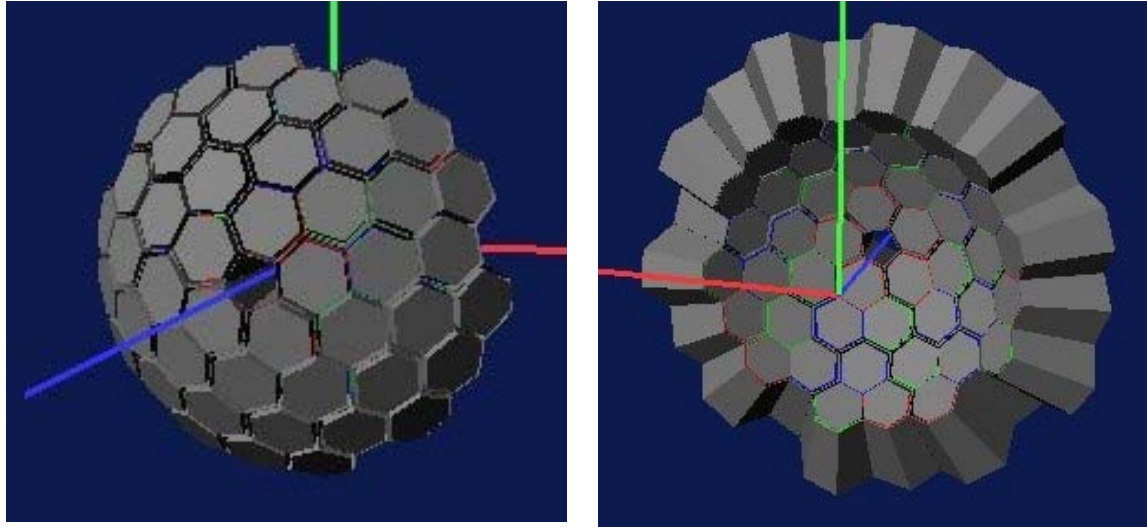




- two main constraints:

1. 15 cluster detectors will not be available yet in 2011/2012 (10-12 instead)
2. The beam hole (pentagon) is too small for the GSI beam size

- General geometry constraint: triple clusters (not single)

Particular constraints for the setup at GSI

- Ideal geometry (first approach, first step)

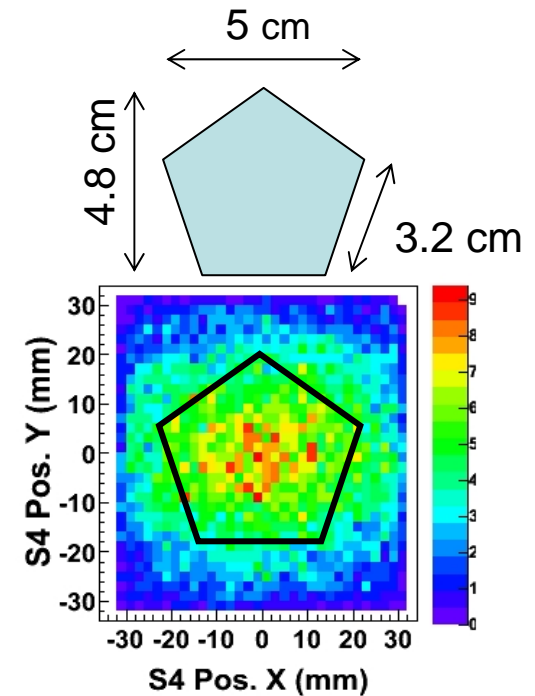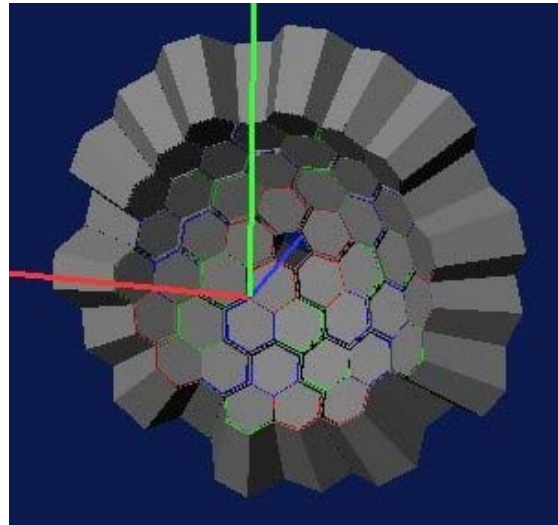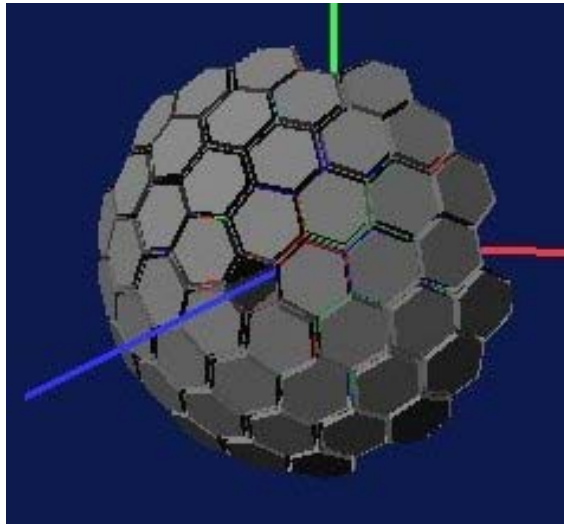

- two main constraints:

1. 15 cluster detectors will not be available yet in 2011/2012 (10-12 instead)
2. The beam hole (pentagon) is too small for the GSI beam size


- General geometry constraint: triple clusters (not single)

Outline

- Particular constraints for the setup at GSI
- **Geometries: shell and compact setups**
- Performance comparison
- Viability of additional γ -ray detectors: RISING, HECTOR, etc
- Gain in performance from 10 to 12 Clusters
- Outlook and conclusion

Shell geometries




more realistic



10 Clusters

Hole too small (appx. 4 cm)




S1



10 Clusters (Hole 1 Cluster)

Hole small (appx. 7 cm)




S2



10 Clusters (Hole 5 Clusters)

Hole (22.8 cm) beam-pipe 16 cm

S3




10 Clusters (Hole 2 Clusters)


Hole (11.5 cm) beam-pipe 11 cm

Compact geometries


C1

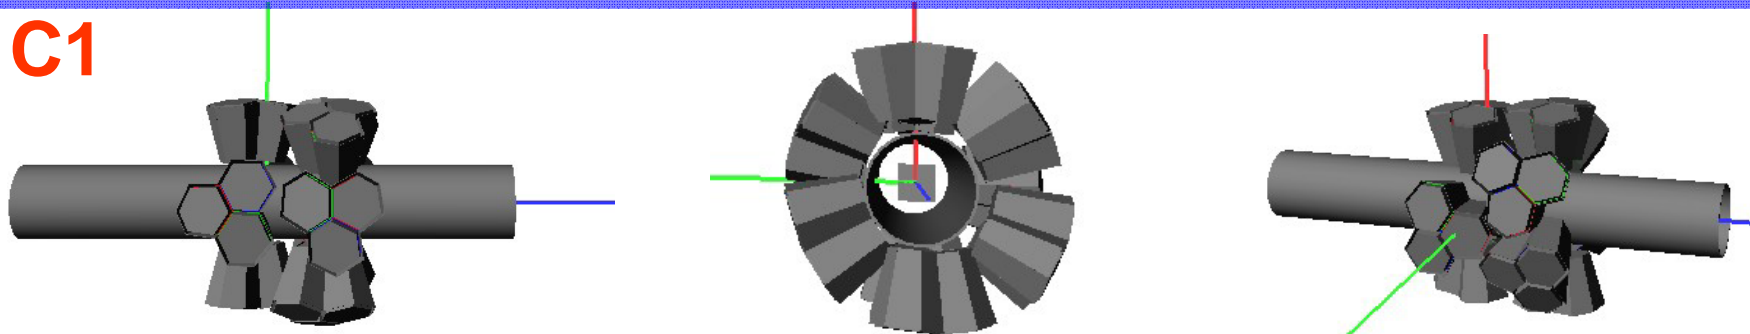


C2

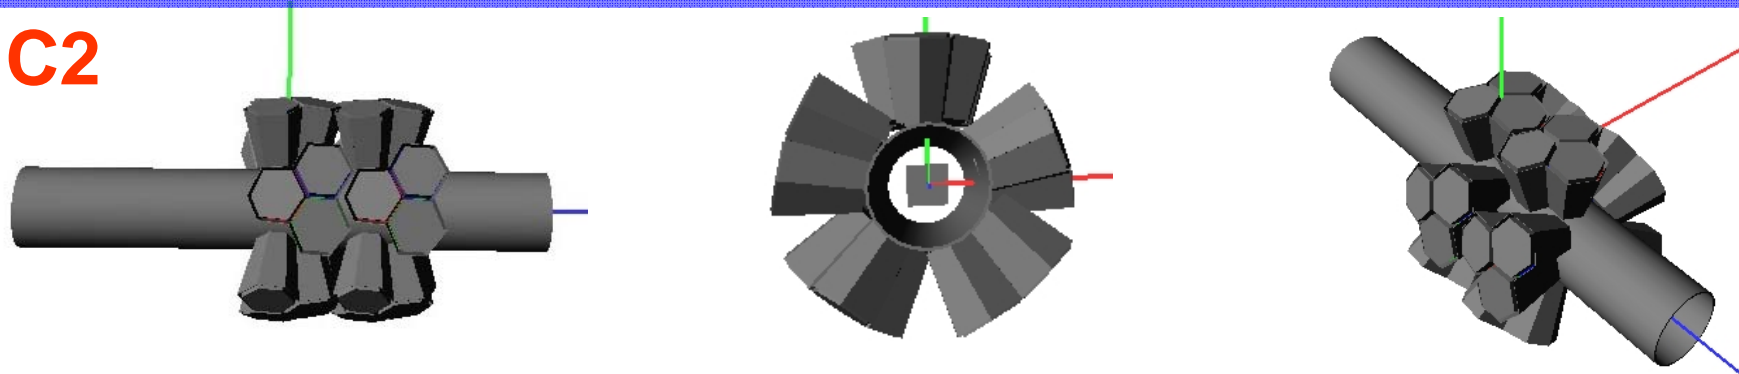


C3

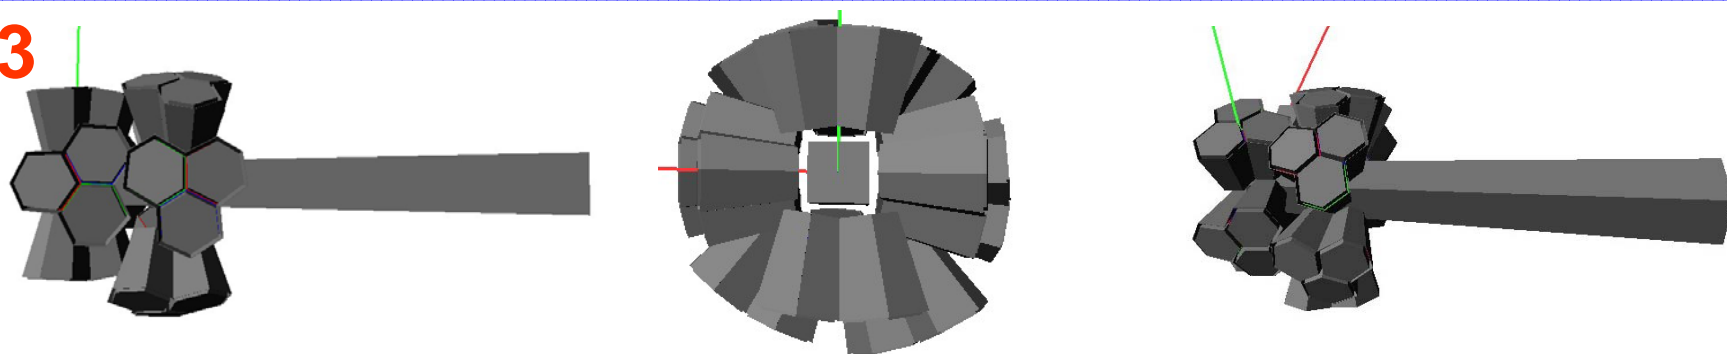

Pros and Cons



- Good resolution
- Tracking between clusters
- Conventional mechanics (LNL)

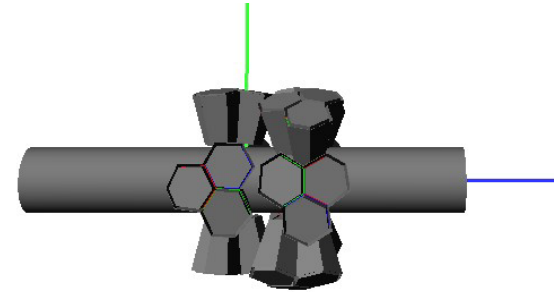

- High efficiency
- γ - γ efficiency
- Larger angular range

- Lower efficiency
- Small solid angle (angular std.)

- Lower resolution
- No tracking between clusters
- New mechanics

Outline

- Particular constraints for the setup at GSI
- Geometries: shell and compact setups
- **Performance comparison**
- Viability of additional γ -ray detectors: RISING, HECTOR, etc
- Gain in performance from 10 to 12 Clusters
- Outlook and conclusion



Performance comparison: general aspects

- Systematic study of efficiency and resolution vs. distance for all geometries

• “Reference physics case”: (GEANT4 AGATA code from E.Farnea et al.)



→ $E_{\gamma,0} = 1$ MeV, recoil nucleus at $\beta = 0.43$ ($E = 100$ MeV/u), $M_{\gamma} = 1$

→ Systematic study several distances sec. target – detector

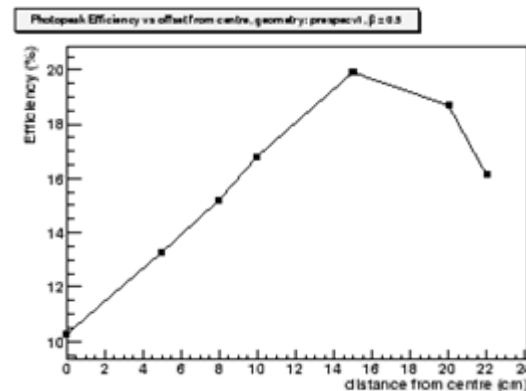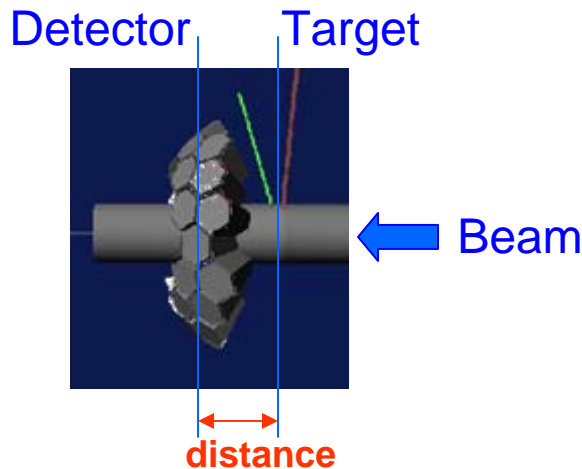


→ GSI FRS Spatial Beam Profile $FWHM_x = 6$ cm $FWHM_y = 4$ cm

Active target
DSSSD

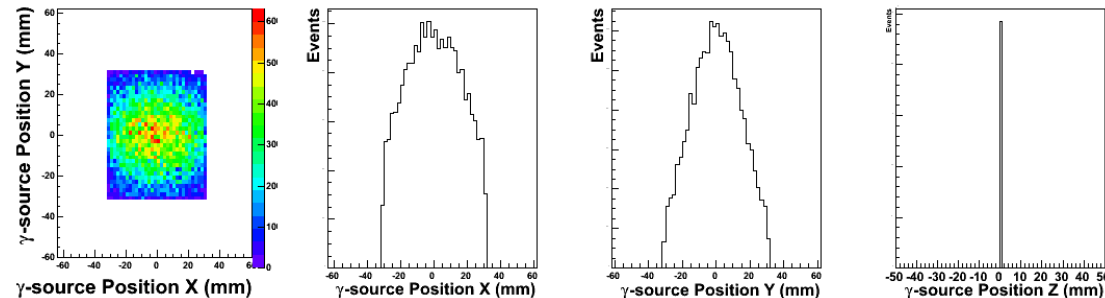


S-Geometries Performance comparison: Efficiency




S1







S2



S3

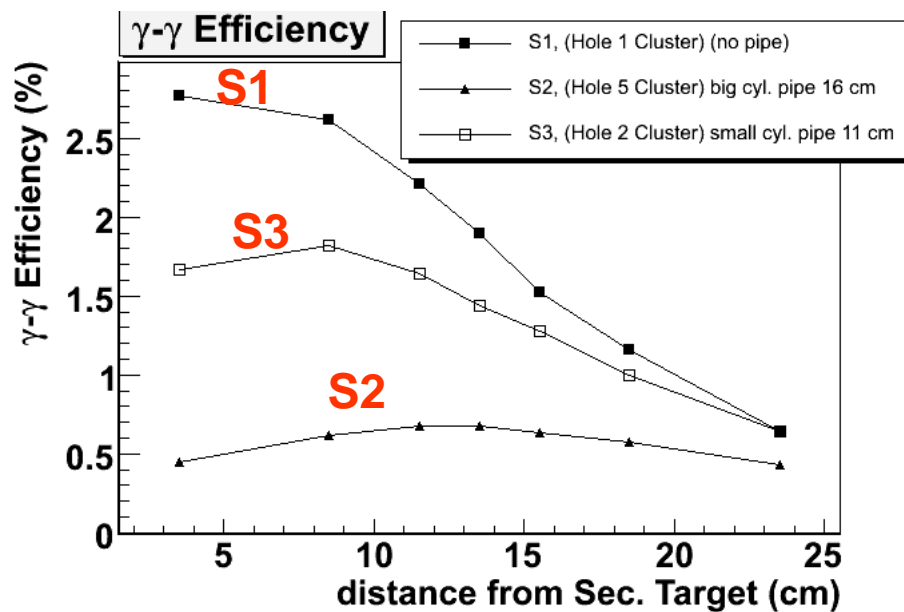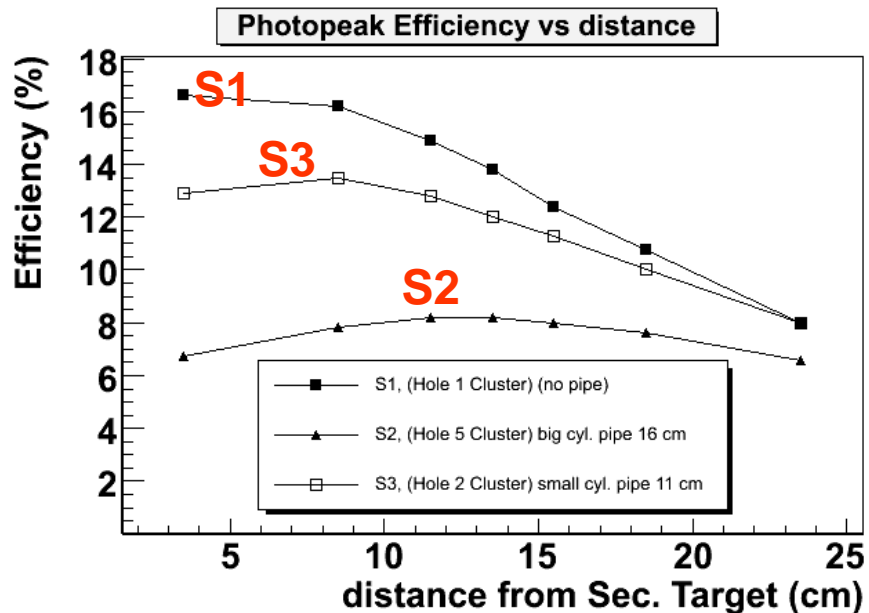

S-Geometries Performance comparison: Resolution

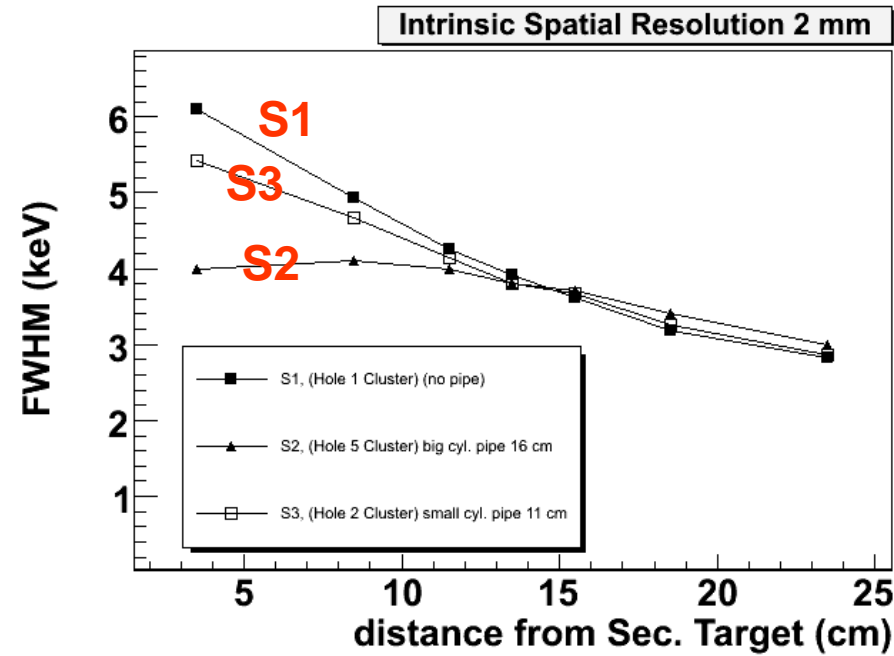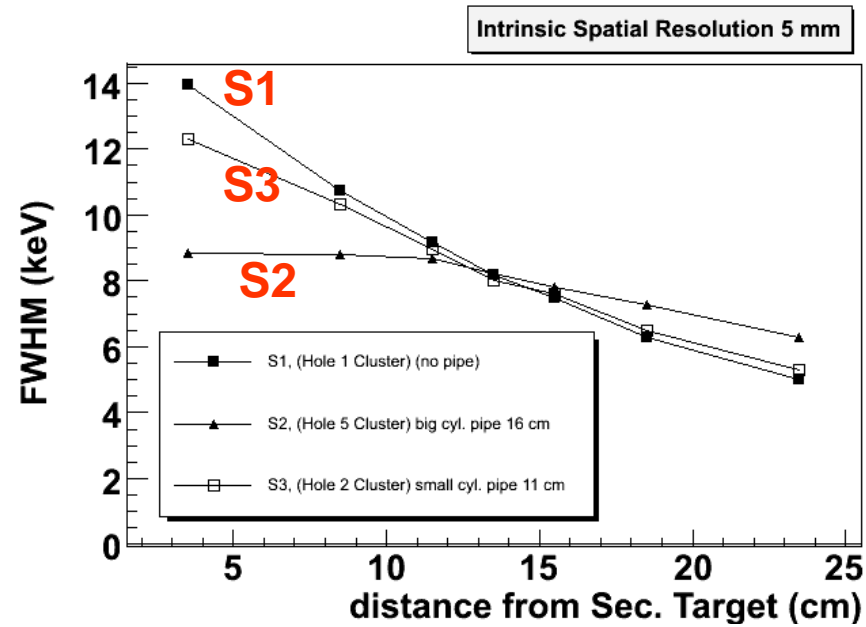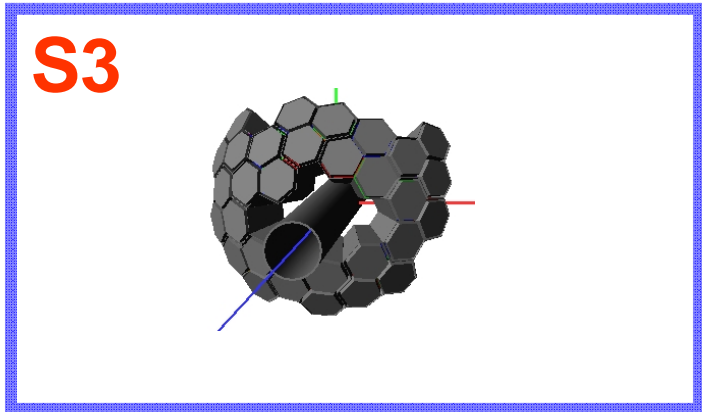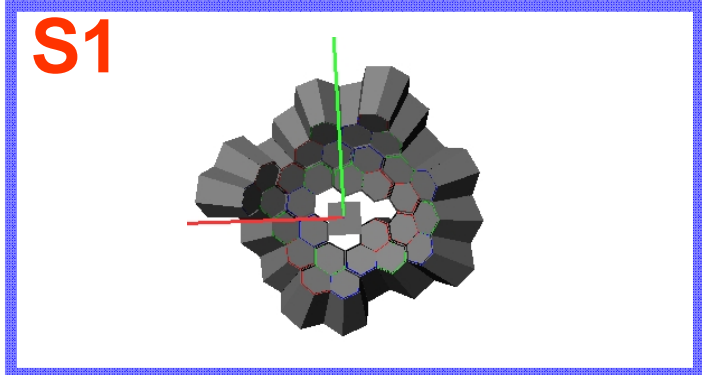


$\Delta r_y = 5 \text{ mm (fwhm)}$


$\Delta r_y = 2 \text{ mm (fwhm)}$

S3: Efficiency and Resolution angular dependence


S3

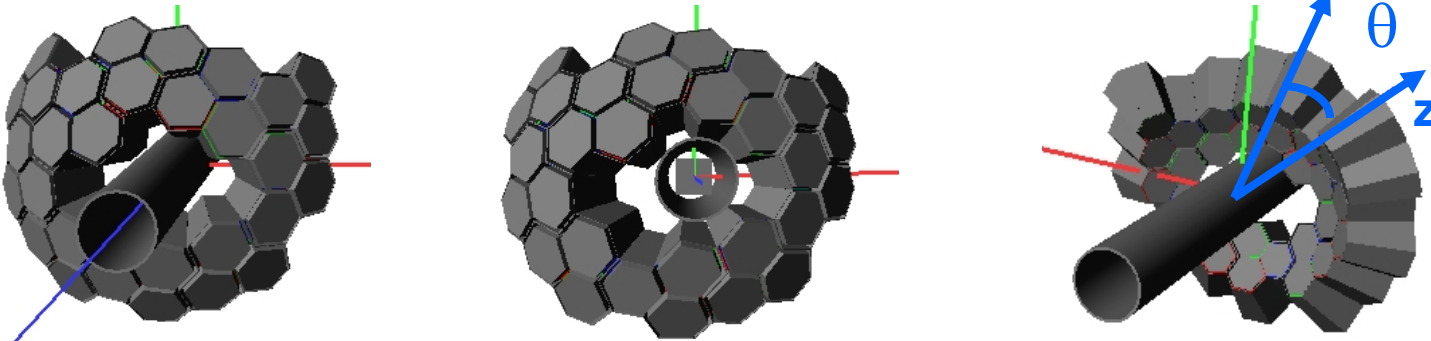

Photopeak Efficiency

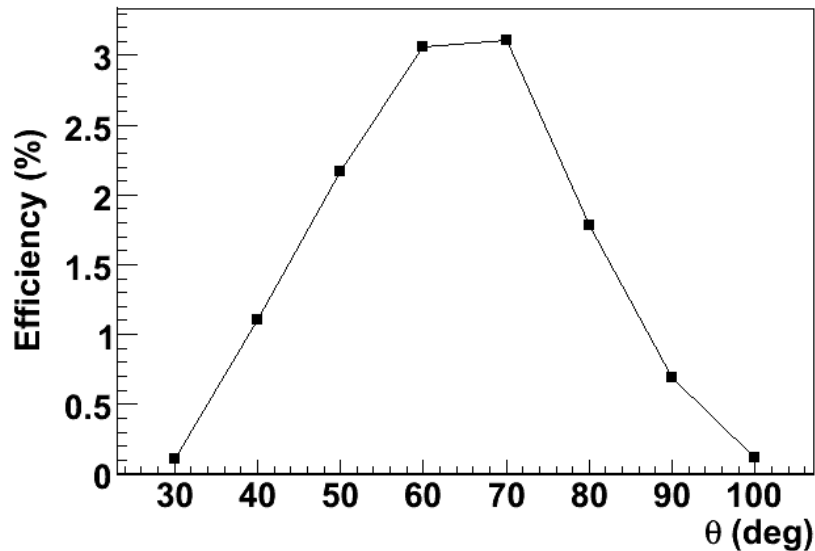


Energy Resolution

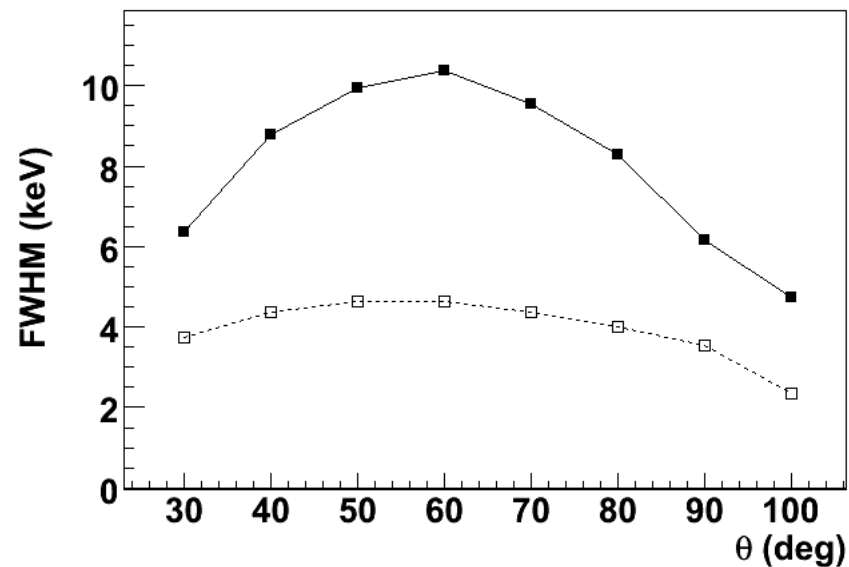


$$\langle \Delta E(S3) \rangle = 10.3 \text{ keV}$$

Shell Geometries performance comparison: Summary




S1



S2




S3

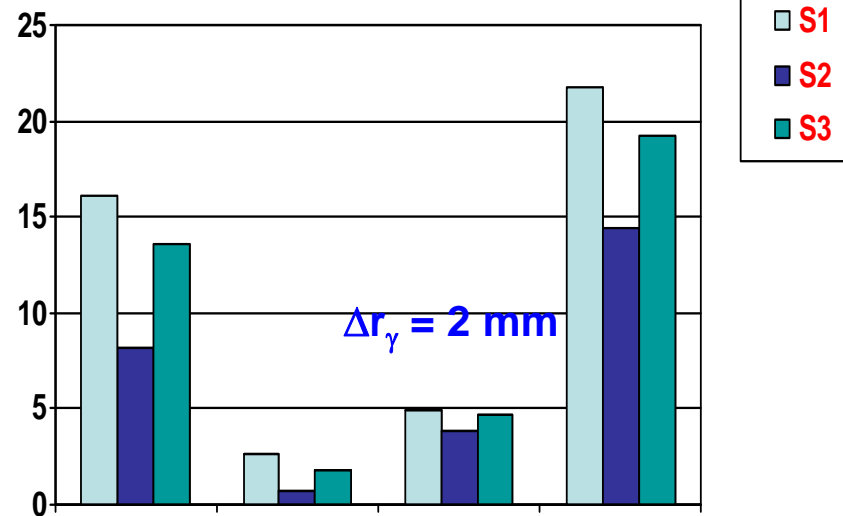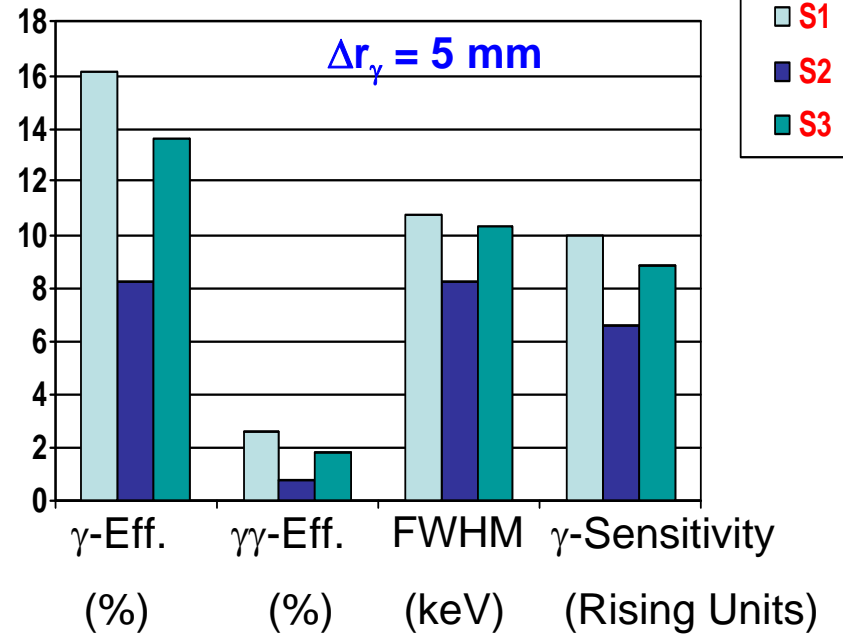


Shell Geometries performance comparison: Summary




S1








S2







S3

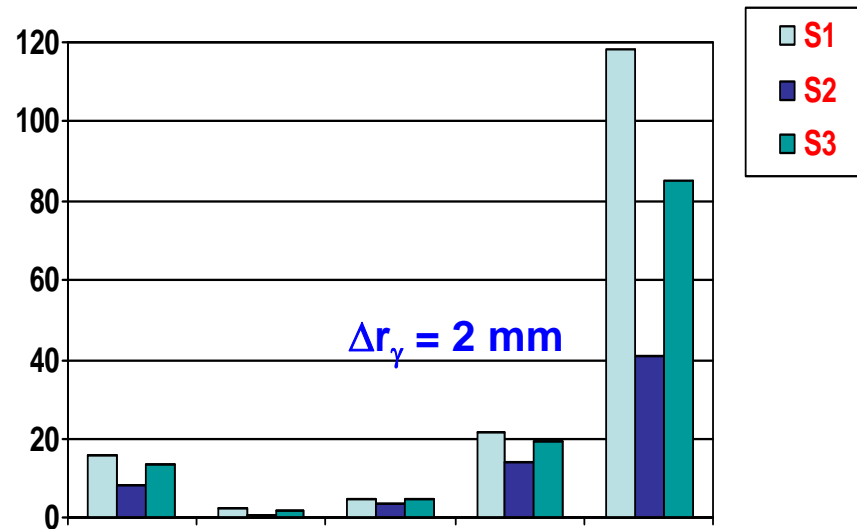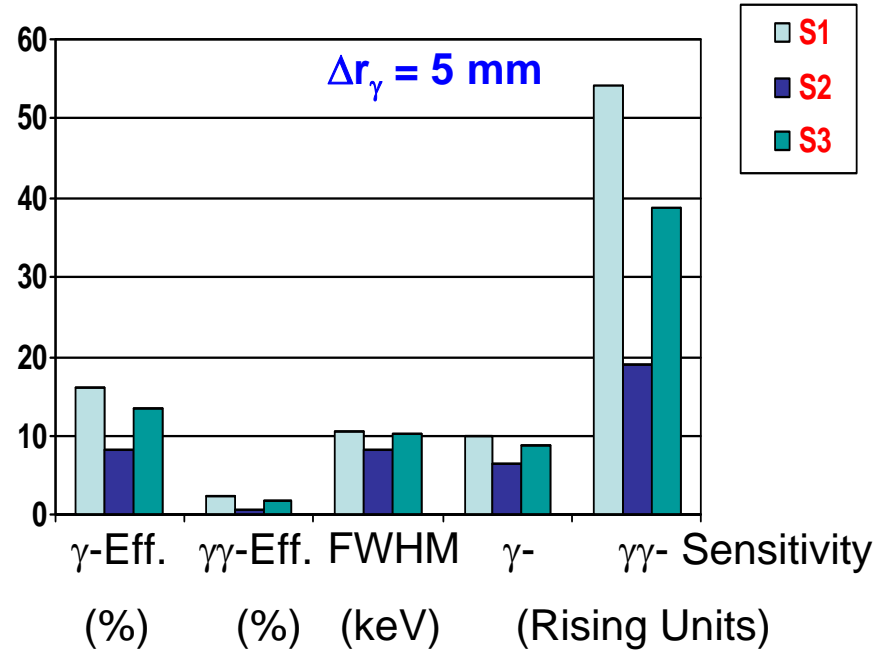


C-Geometries performance comparison: Efficiency

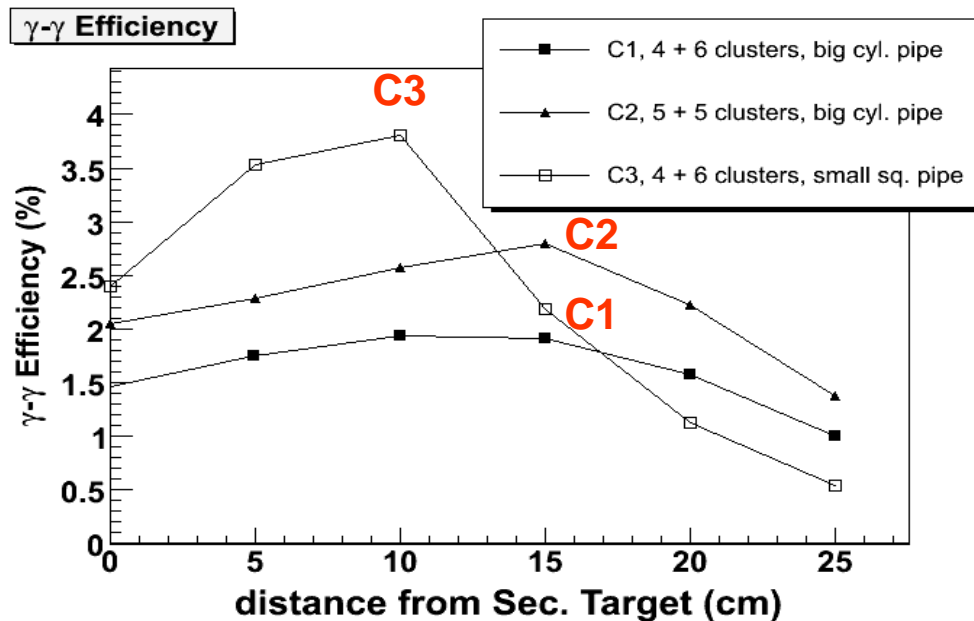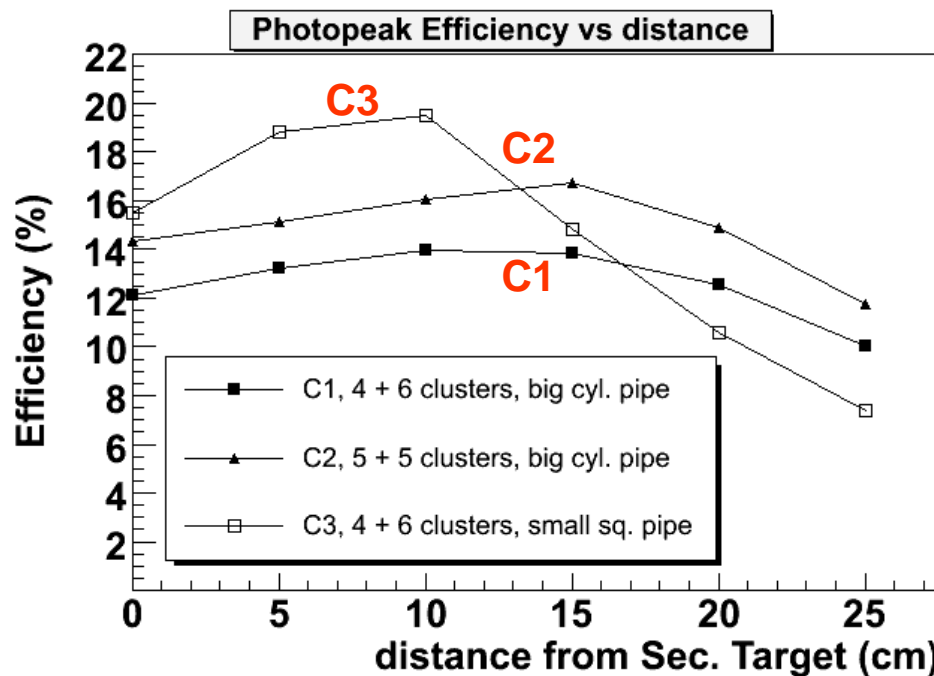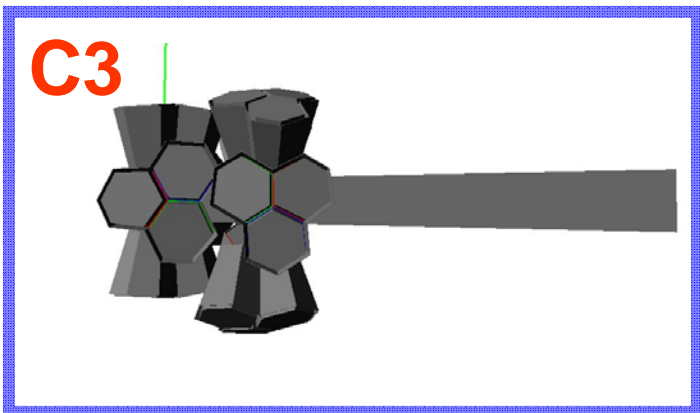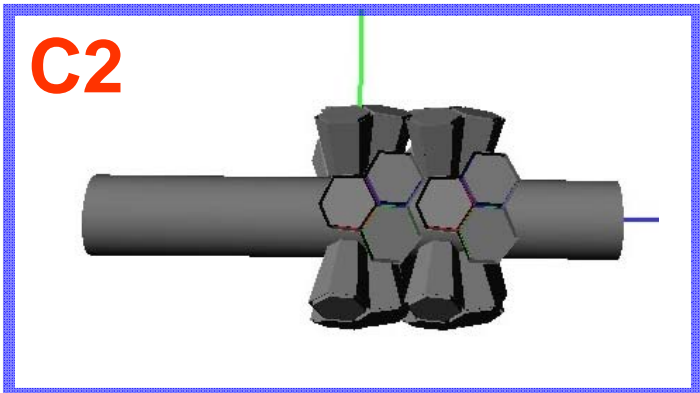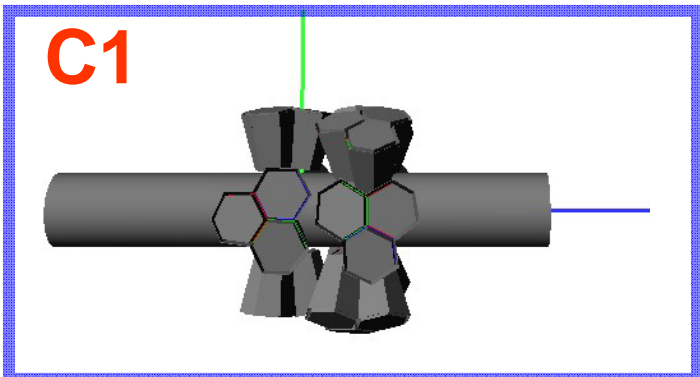

C-Geometries performance comparison: Resolution

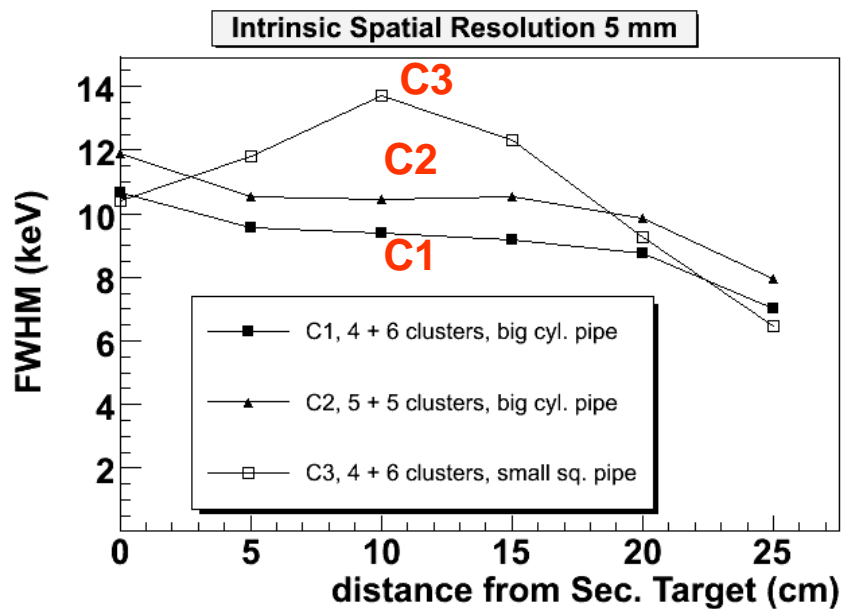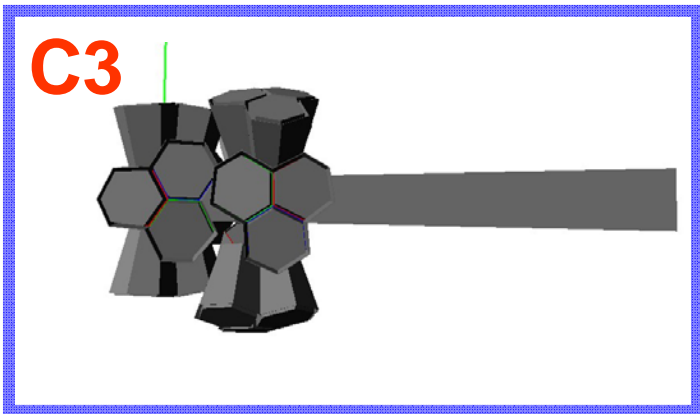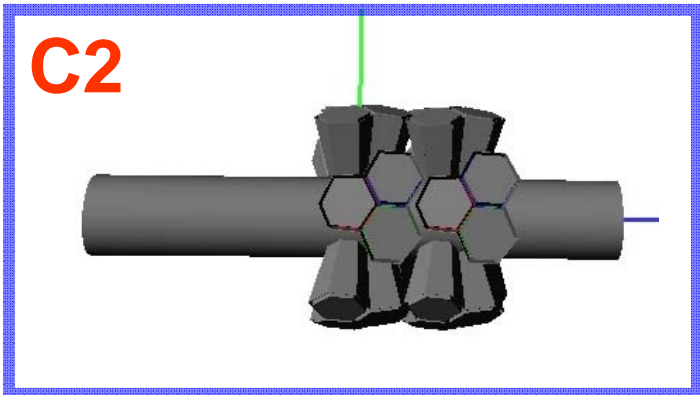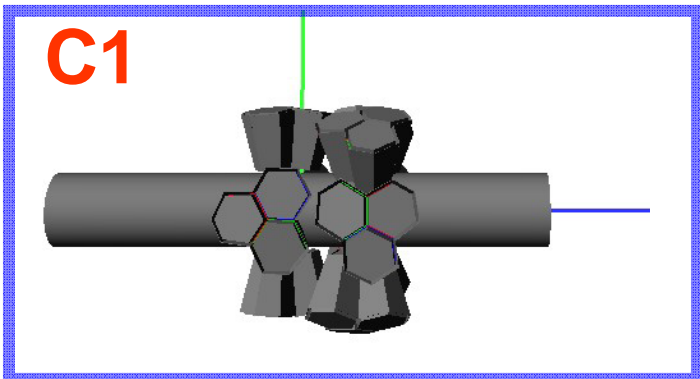


$\Delta r_y = 5 \text{ mm (fwhm)}$

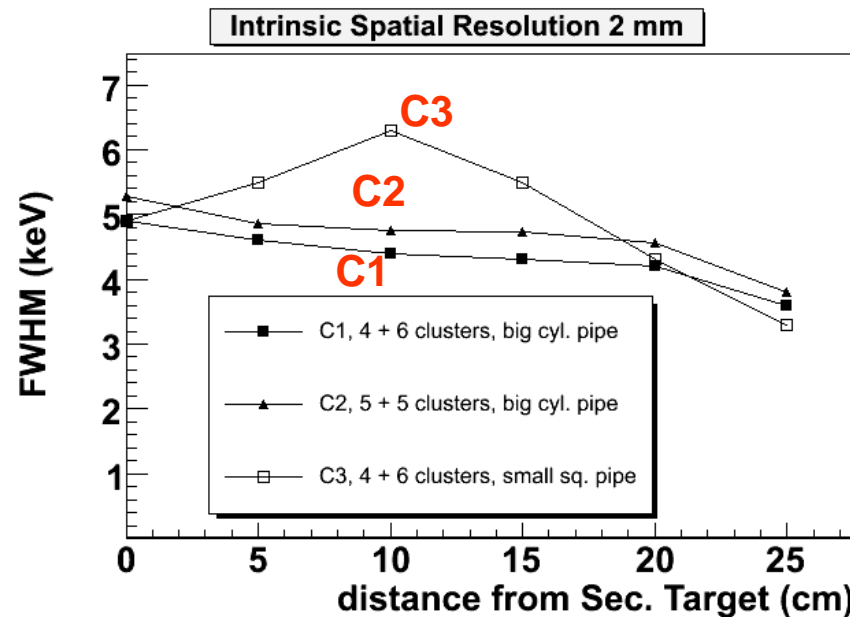


$\Delta r_y = 2 \text{ mm (fwhm)}$


C2: Efficiency and Resolution angular dependence

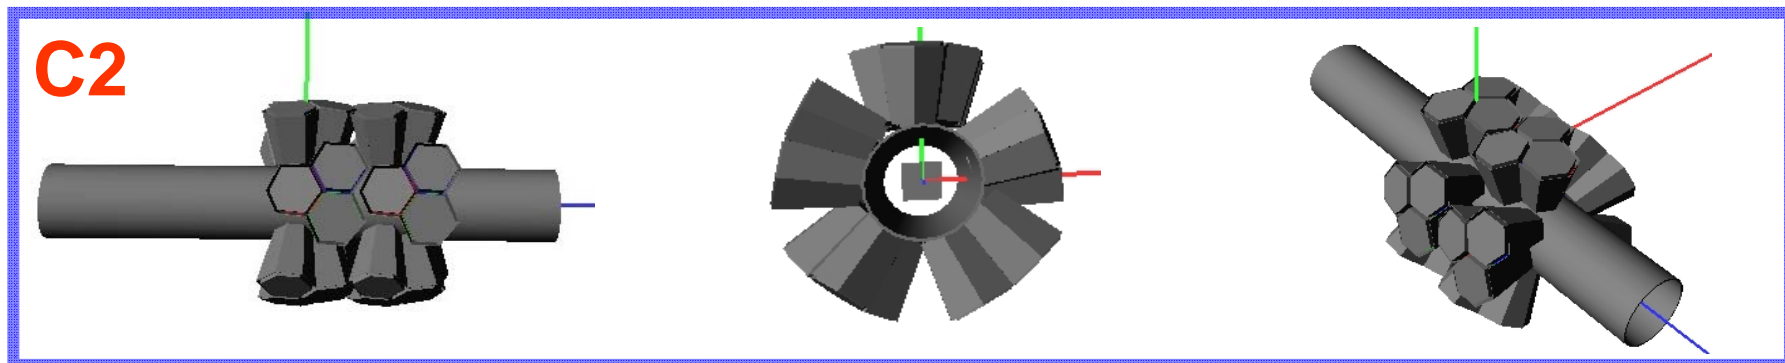

Photopeak Efficiency





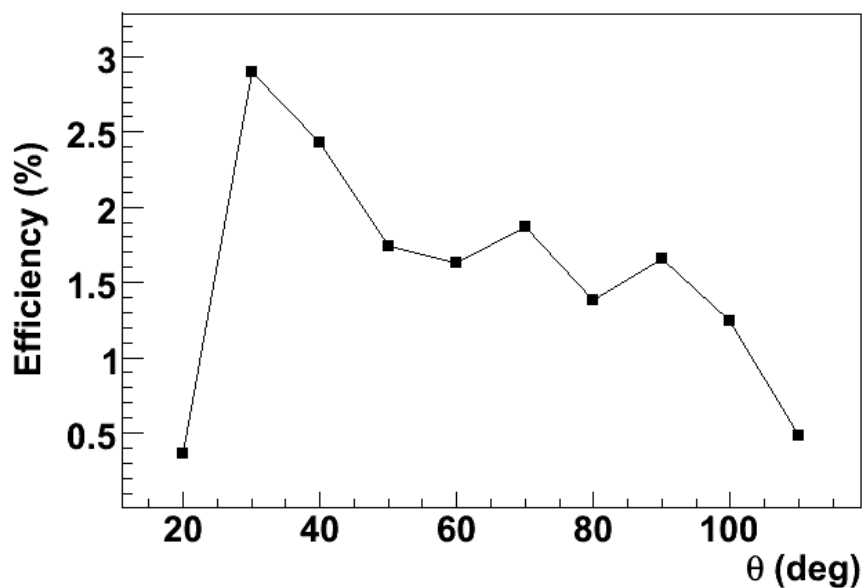


Energy Resolution





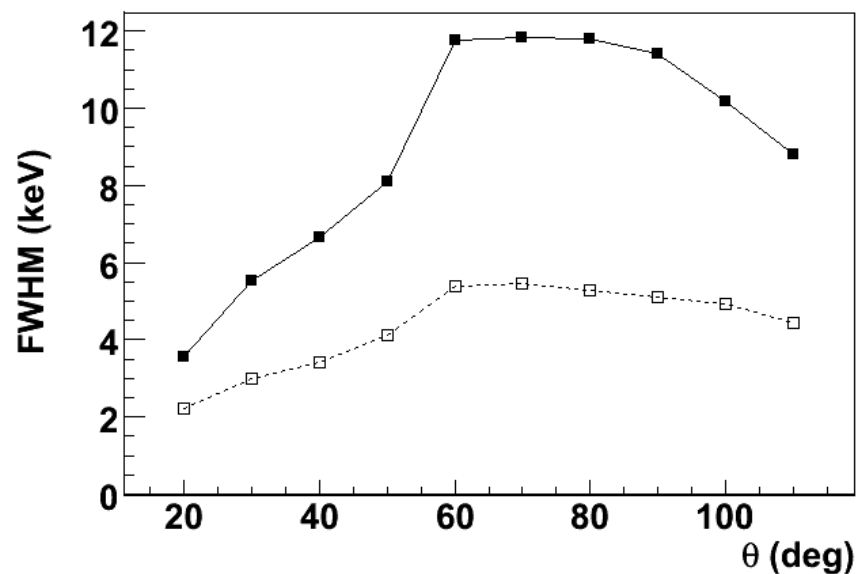


$$\langle \Delta E(\text{C2}) \rangle = 10.6 \text{ keV}$$

C-Geometries performance comparison: Summary

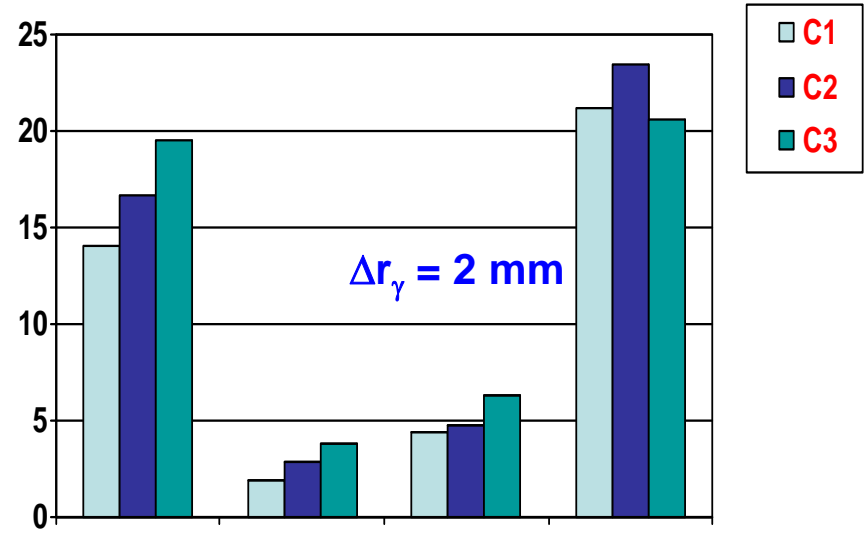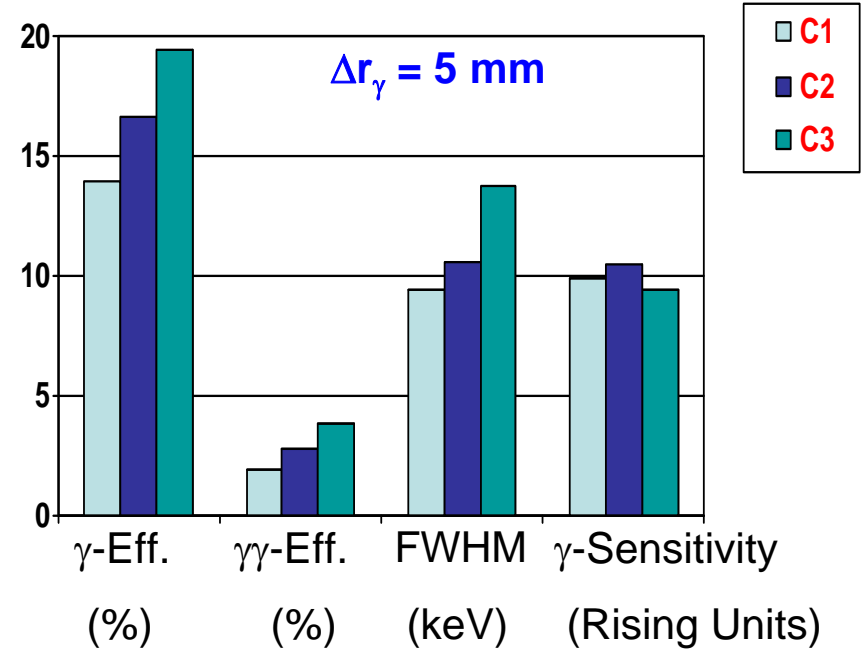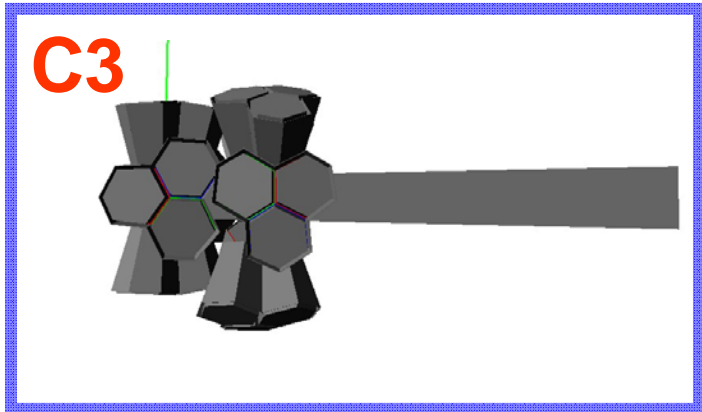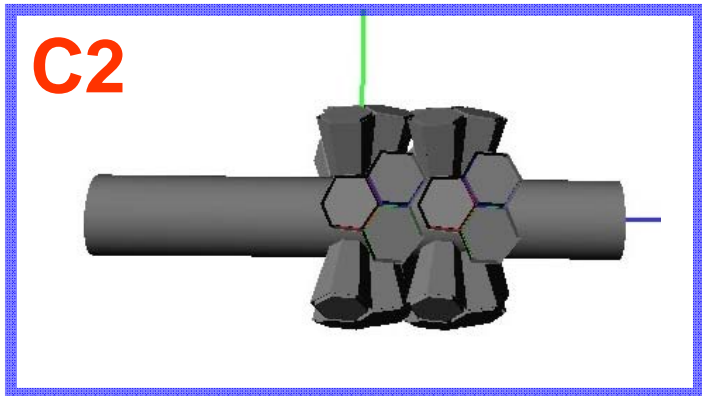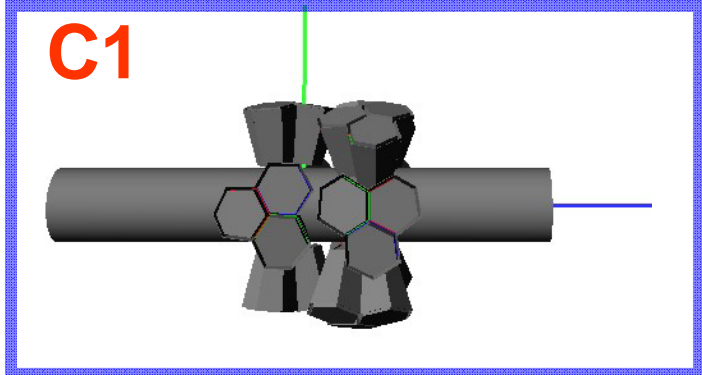


C-Geometries performance comparison: Summary

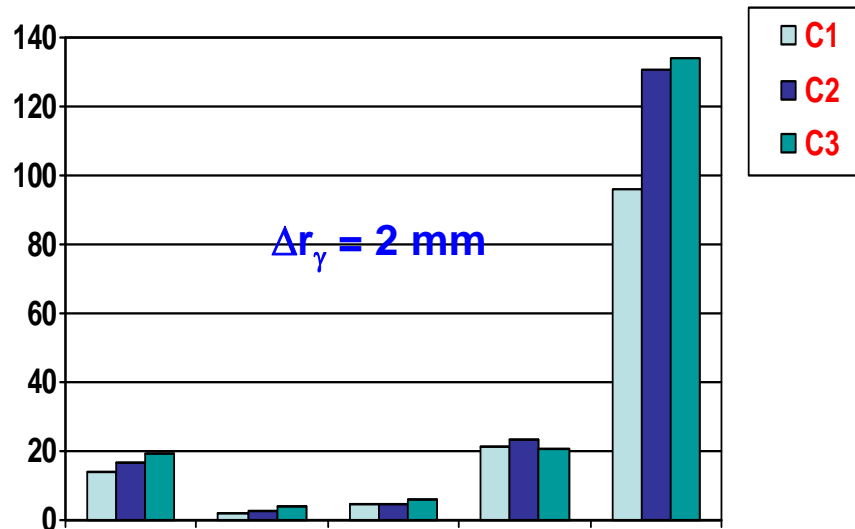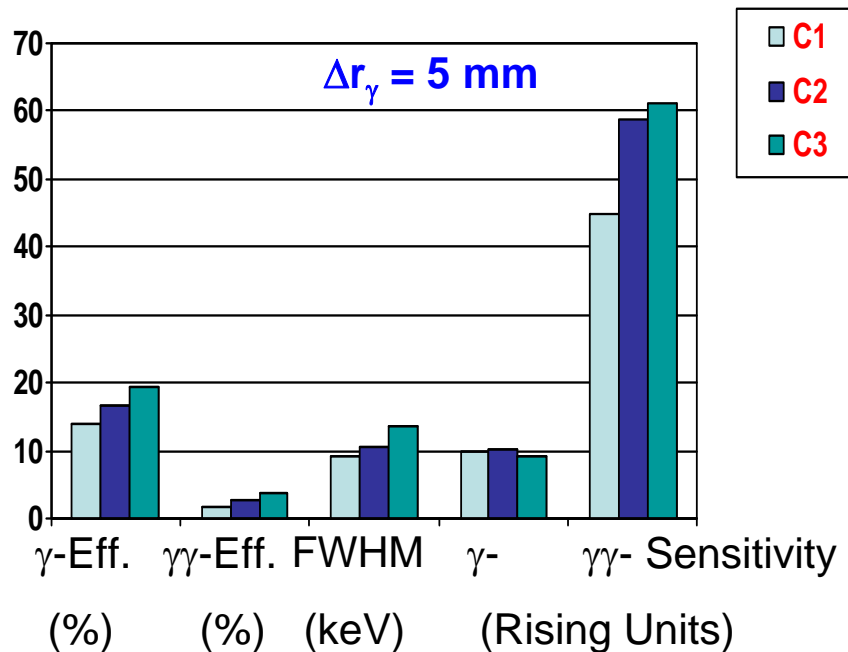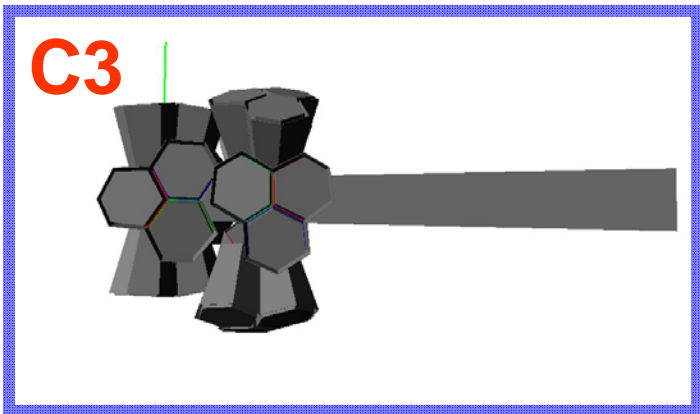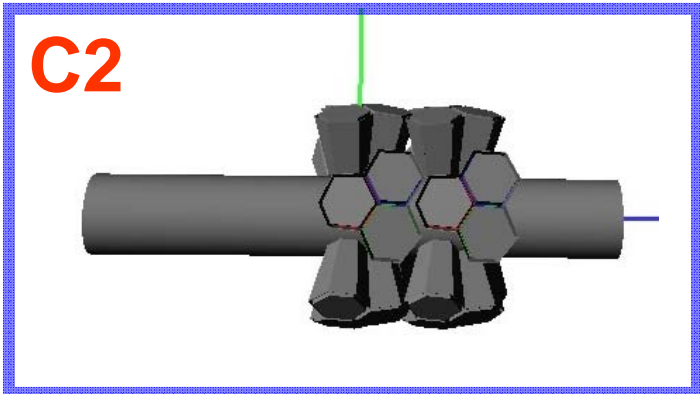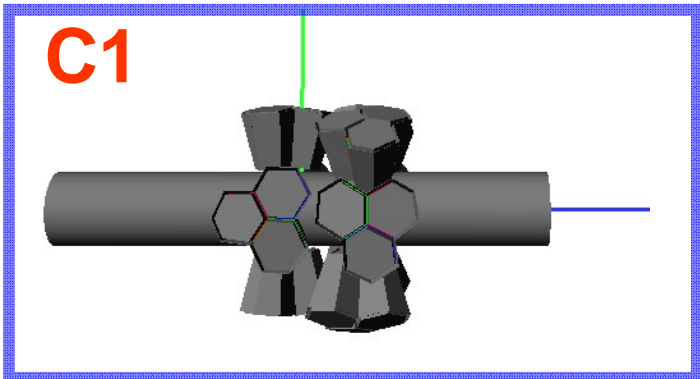


S- and C-Geometry Performance, Quantitative Comparison


S1




S2




S3




C1

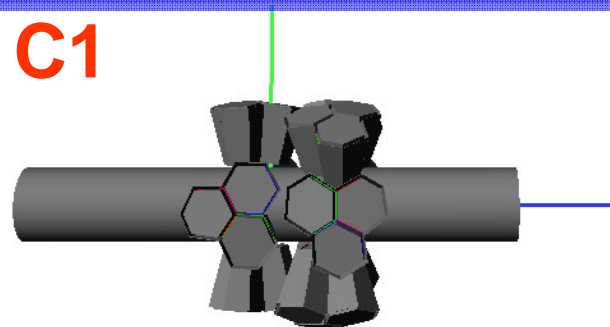

C2

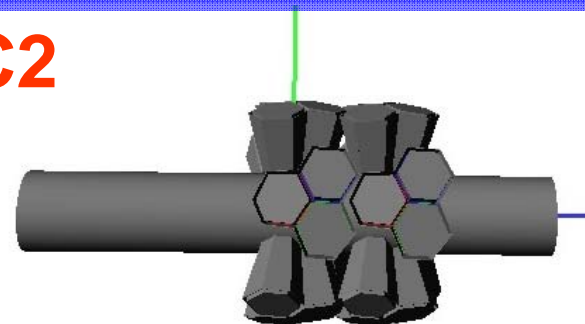


C3

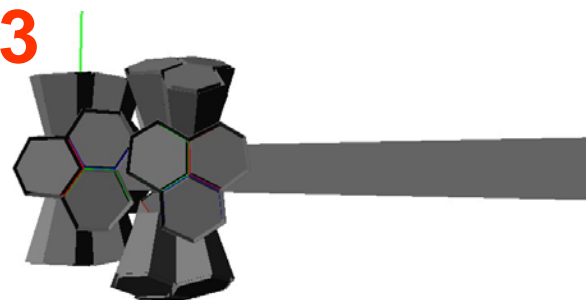


S- and C-Geometry Performance, Quantitative Comparison


S1

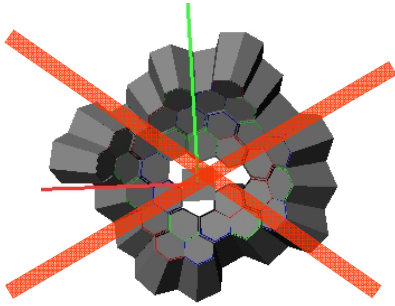

S2




S3




Technically
difficult or
impossible


C1

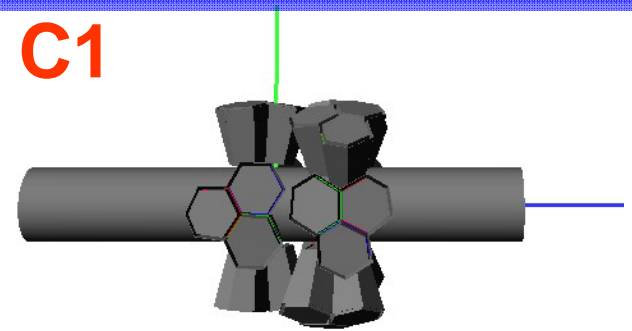

C2

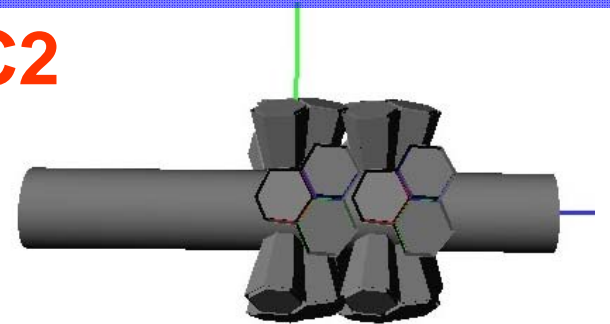


C3

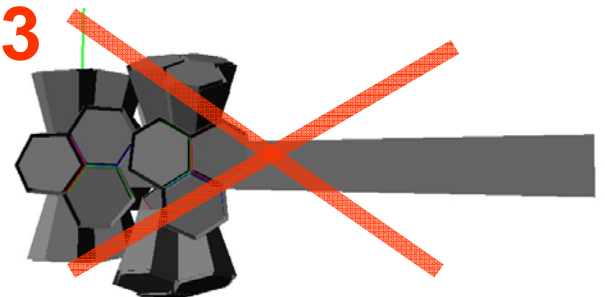


S- and C-Geometry Performance, Quantitative Comparison

S1

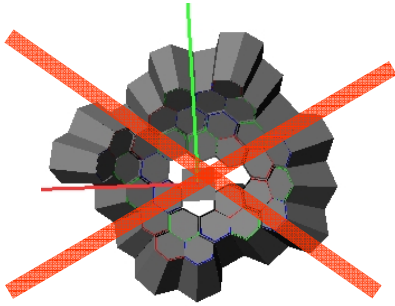


Technically
difficult or
impossible

S2

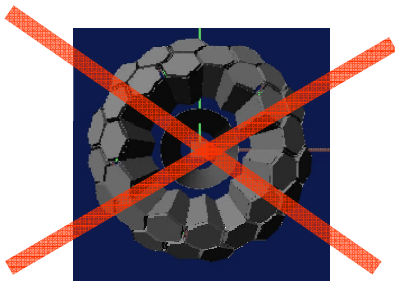


Worse
performance
than the other
option S3 or C2


S3




C1

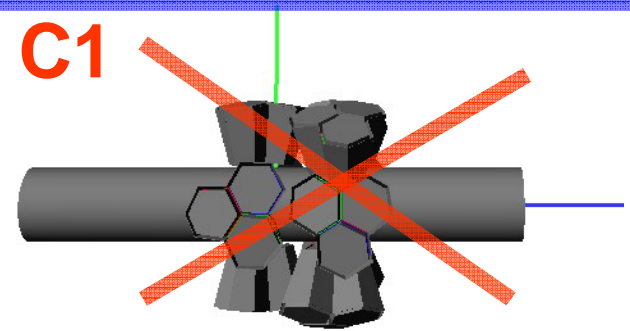

C2

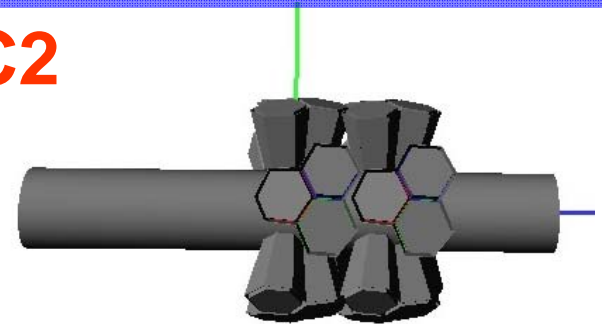


C3


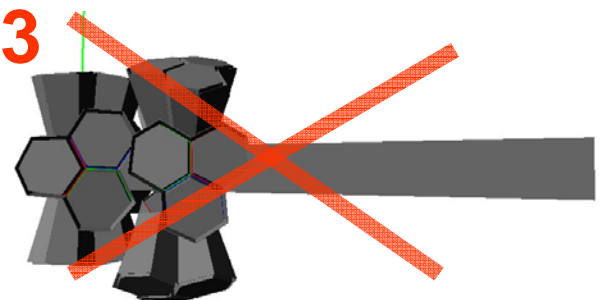


S- and C-Geometry Performance, Quantitative Comparison

S3




C2

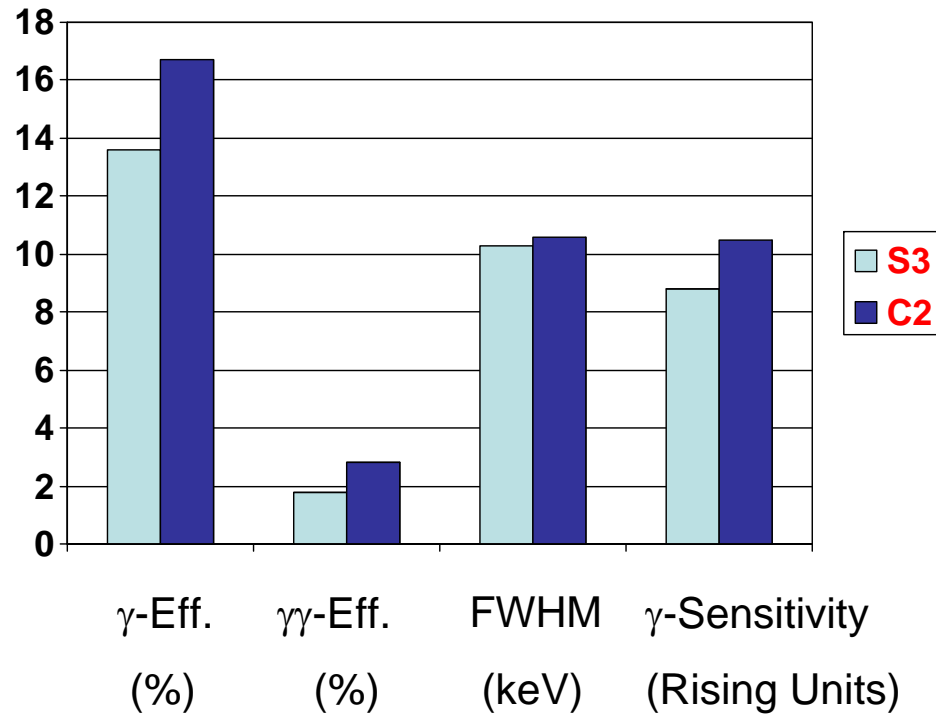
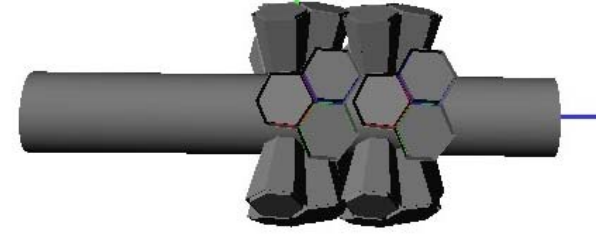


S- and C-Geometry Performance, Quantitative Comparison





S3



C2

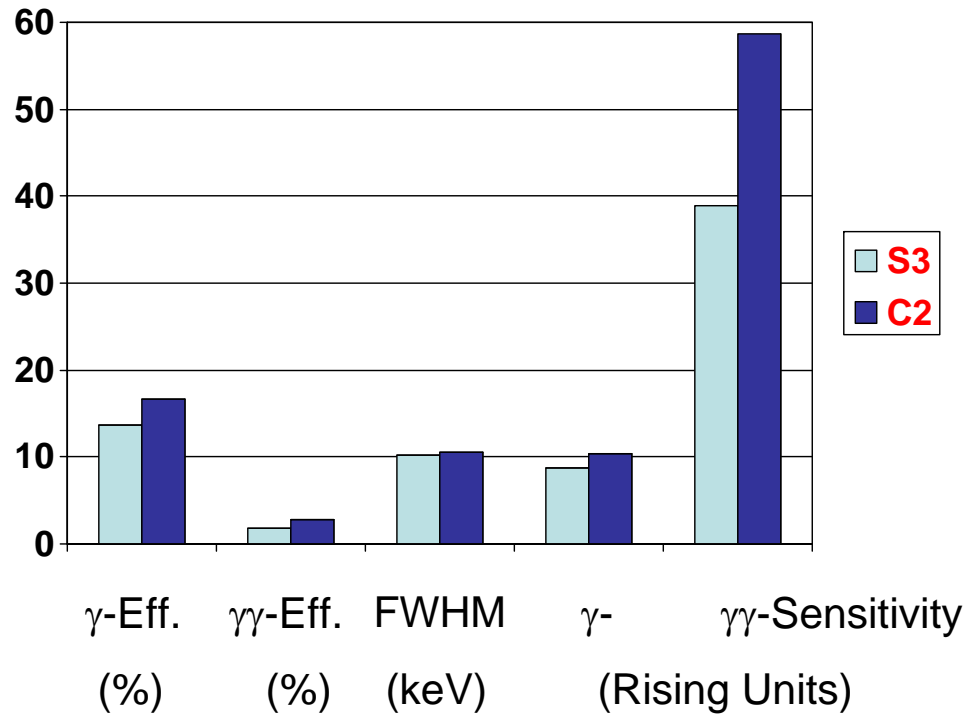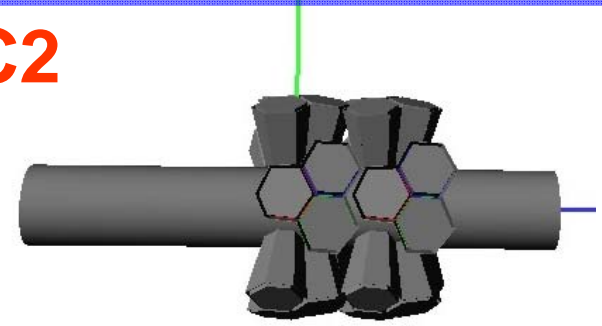





S- and C-Geometry Performance, Quantitative Comparison

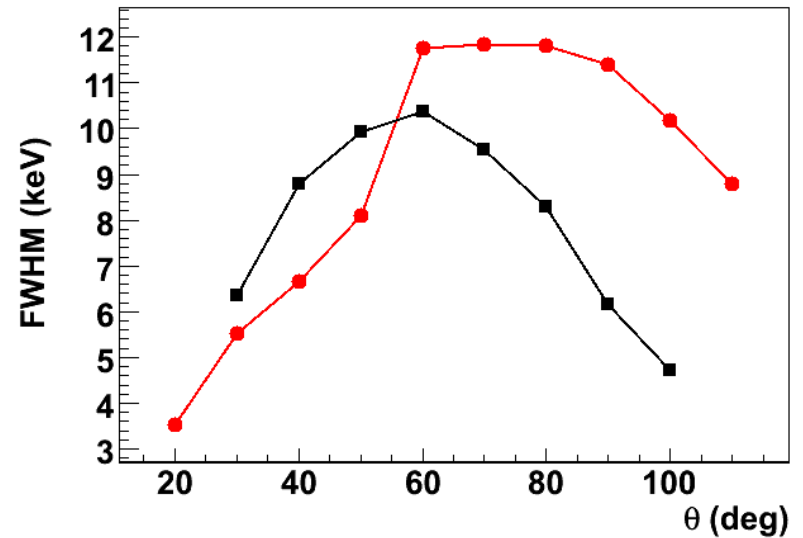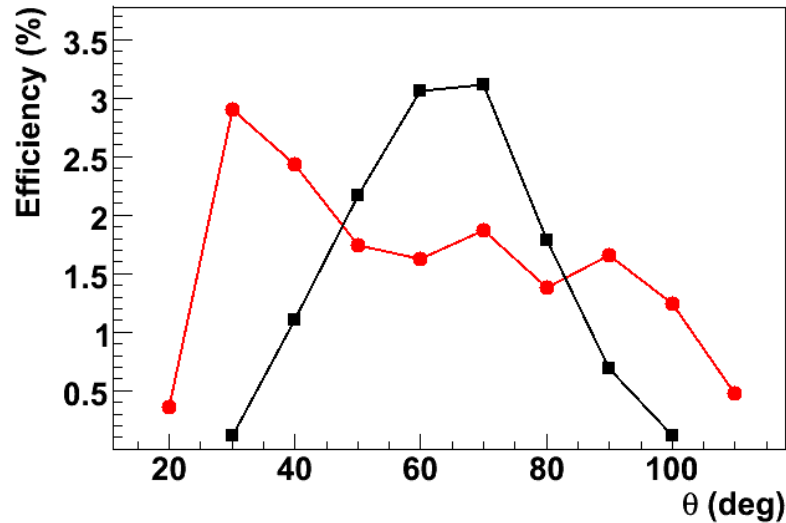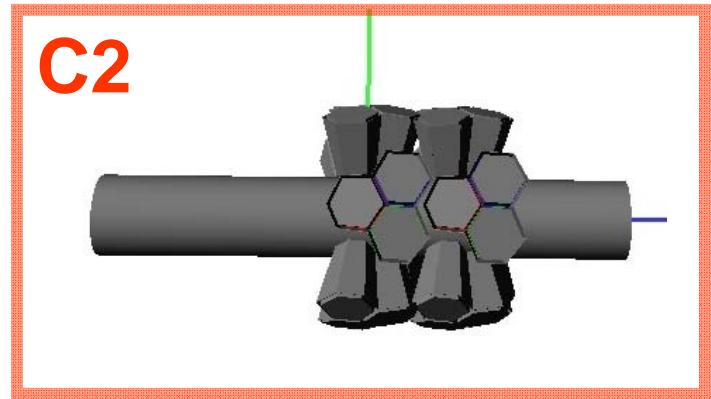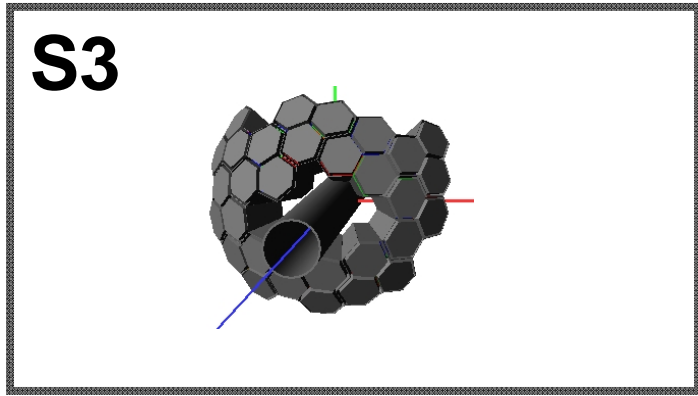

$$\langle \Delta E(S3) \rangle = 10.3 \text{ keV}$$

$$\langle \Delta E(C2) \rangle = 10.6 \text{ keV}$$





S- and C-Geometry Performance, Quantitative Comparison

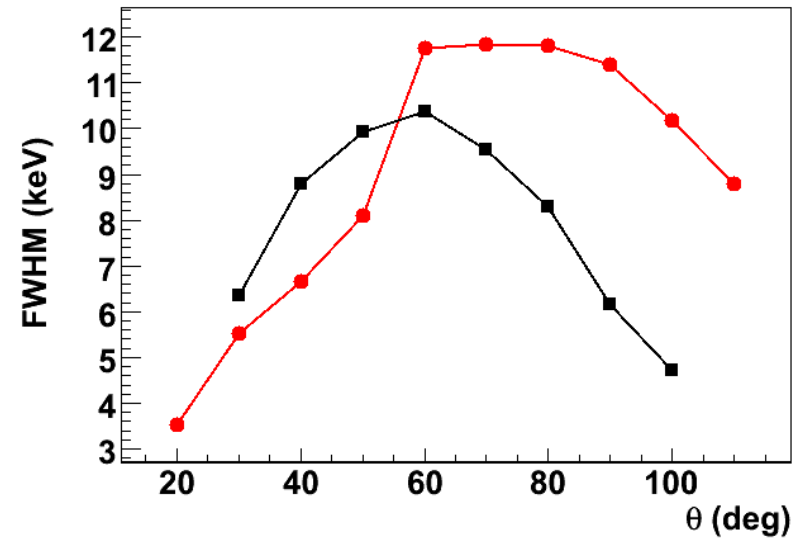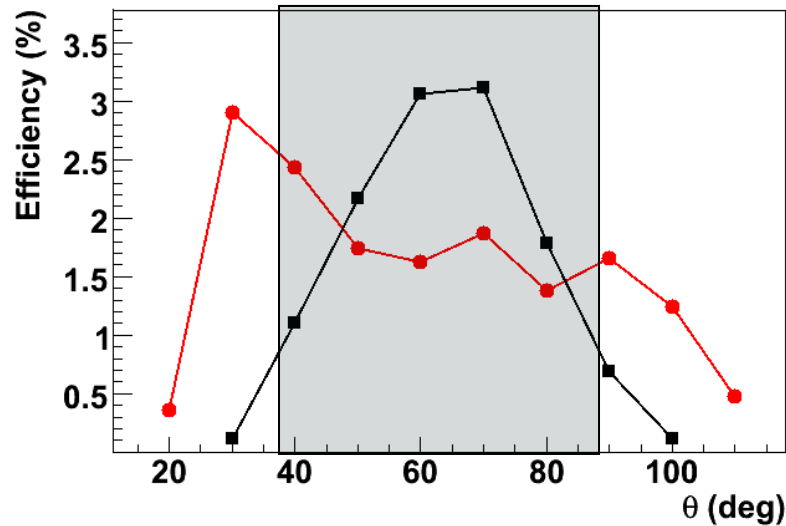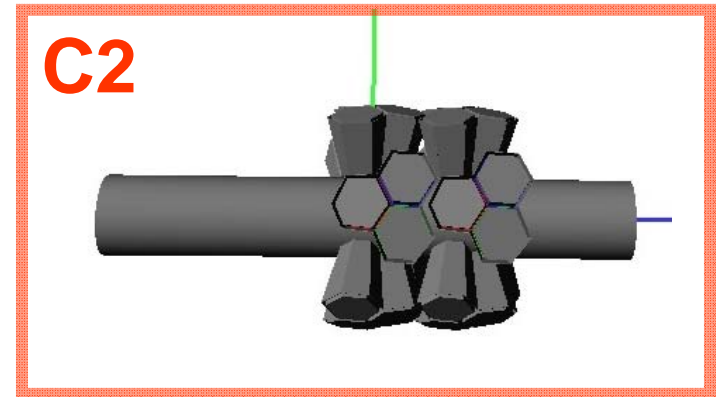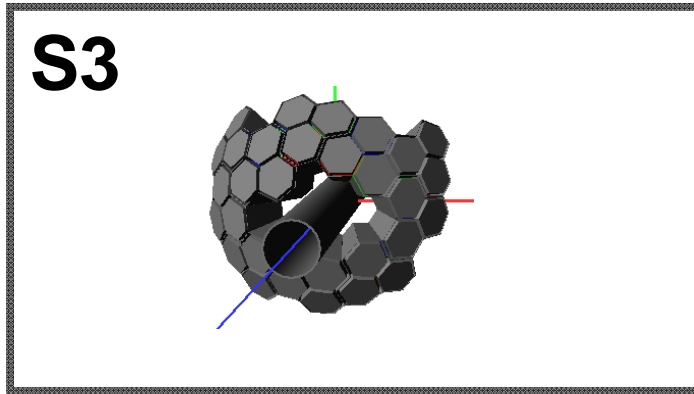

$$\langle \Delta E(S3) \rangle = 10.3 \text{ keV}$$

$$\langle \Delta E(C2) \rangle = 10.6 \text{ keV}$$

S- and C-Geometry Performance, Quantitative Comparison

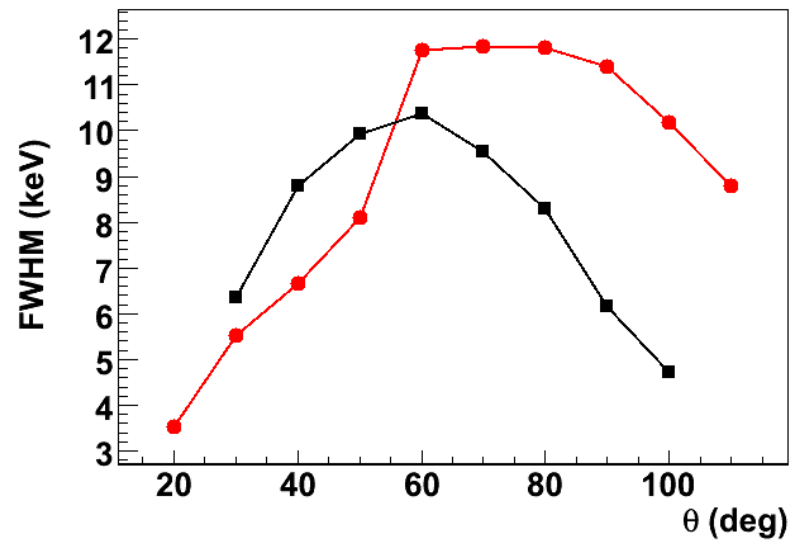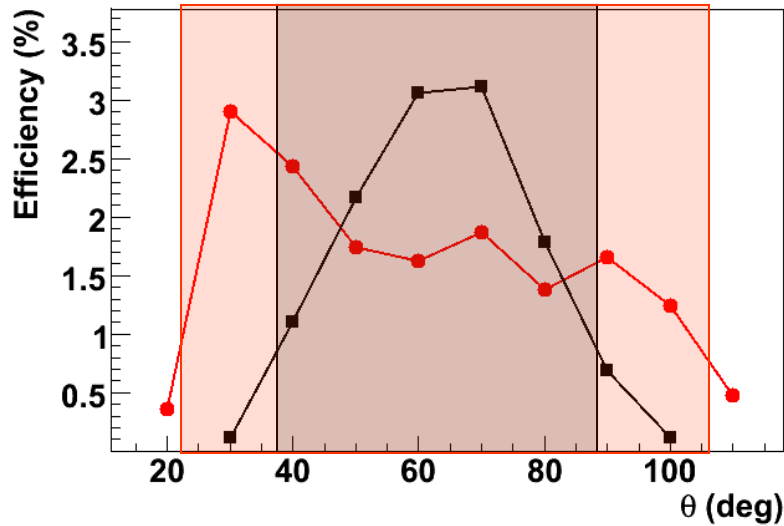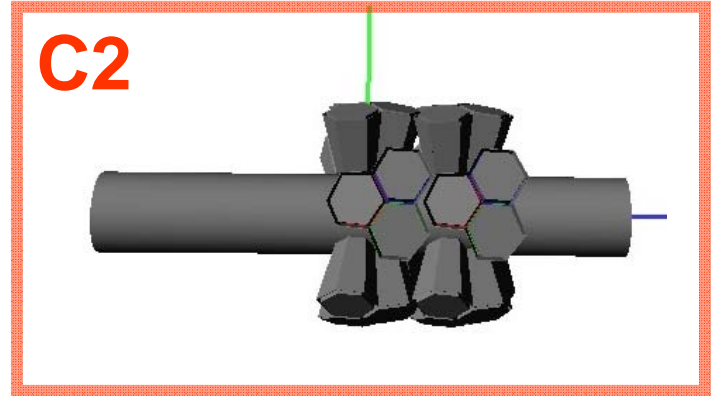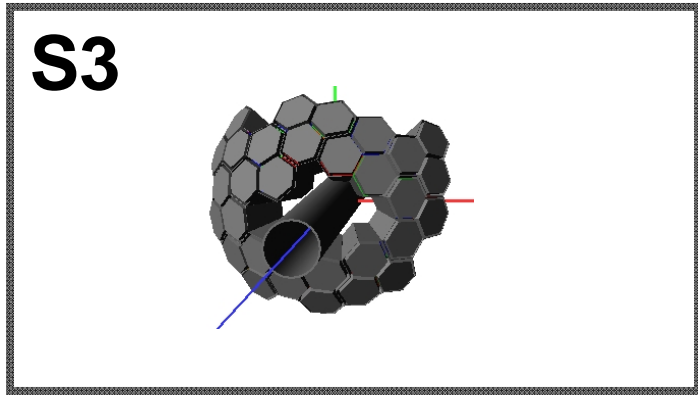

$$\langle \Delta E(S3) \rangle = 10.3 \text{ keV}$$

$$\langle \Delta E(C2) \rangle = 10.6 \text{ keV}$$

Outline




- Particular constraints for the setup at GSI
- Geometries: shell and compact setups
- Performance comparison
- **Viability of additional γ -ray detectors: RISING, HECTOR, etc**
- Gain in performance from 10 to 12 Clusters
- Outlook and conclusion

Solid angle occupied and free

C2



Optimal target position

Approximate distances and angles

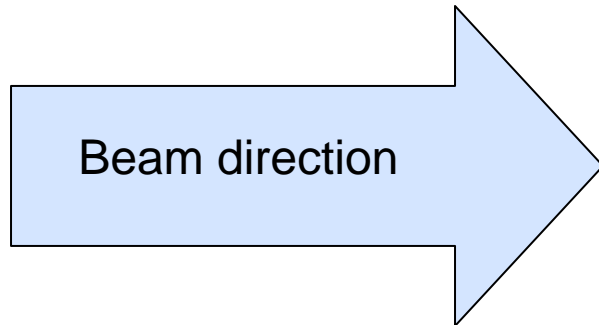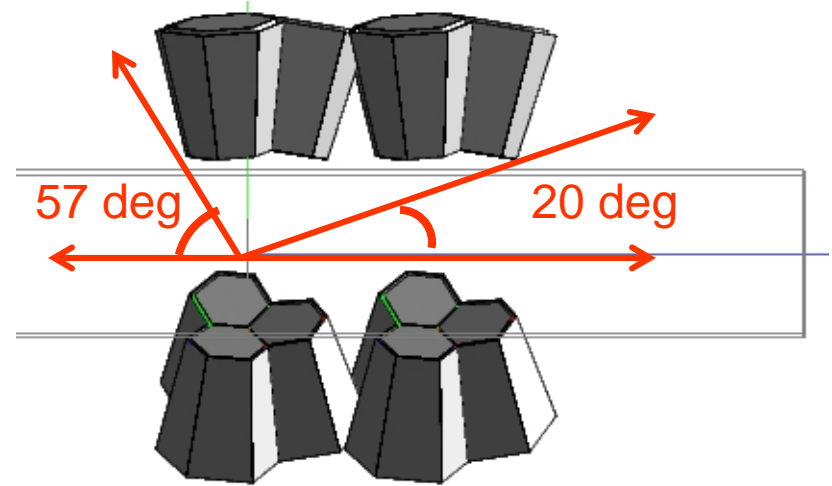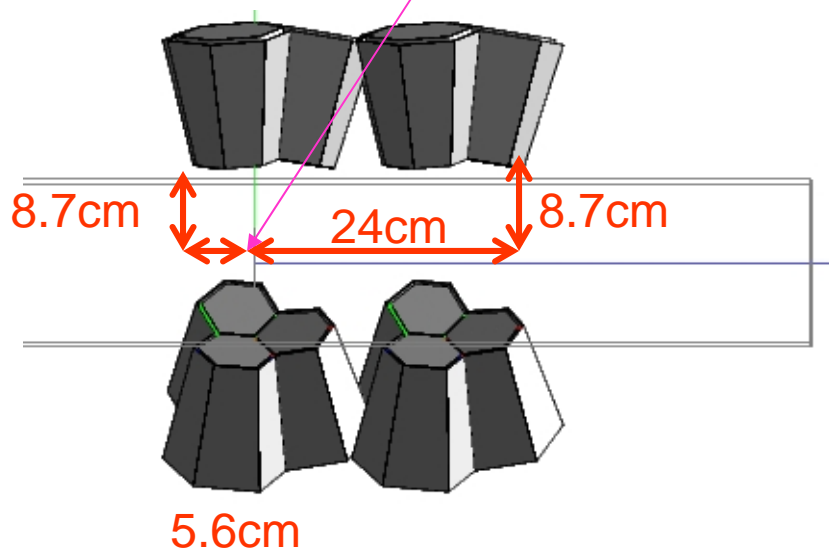



Solid angle occupied and free

C2

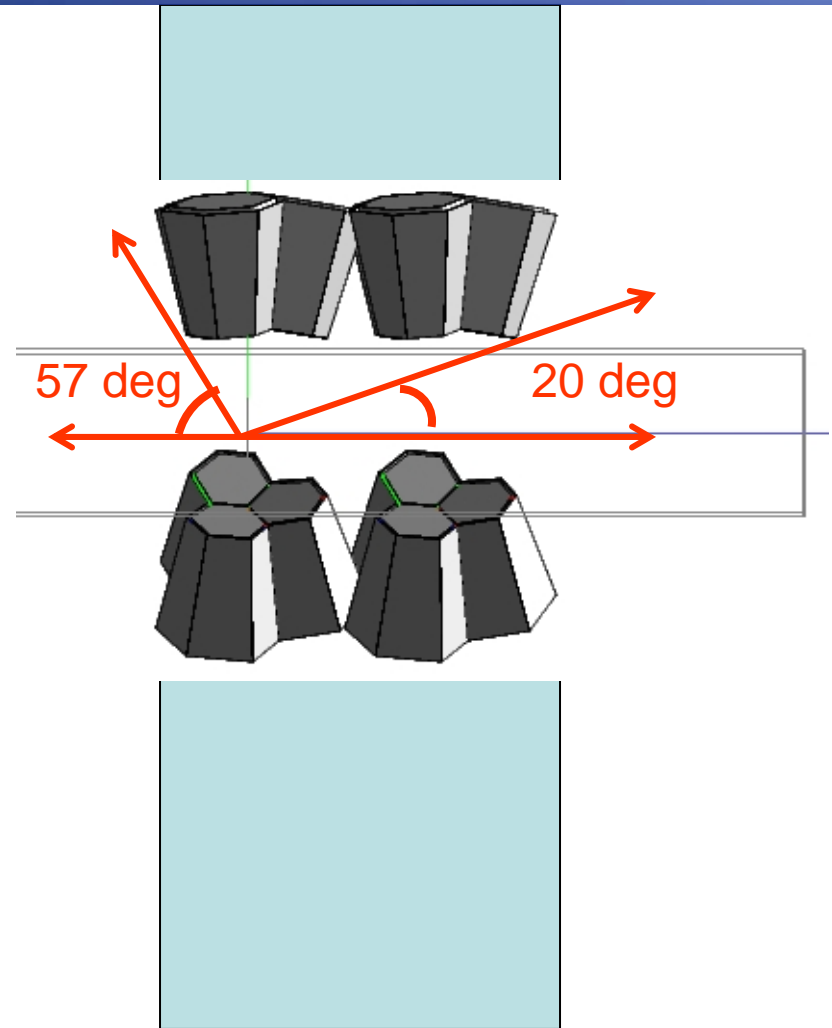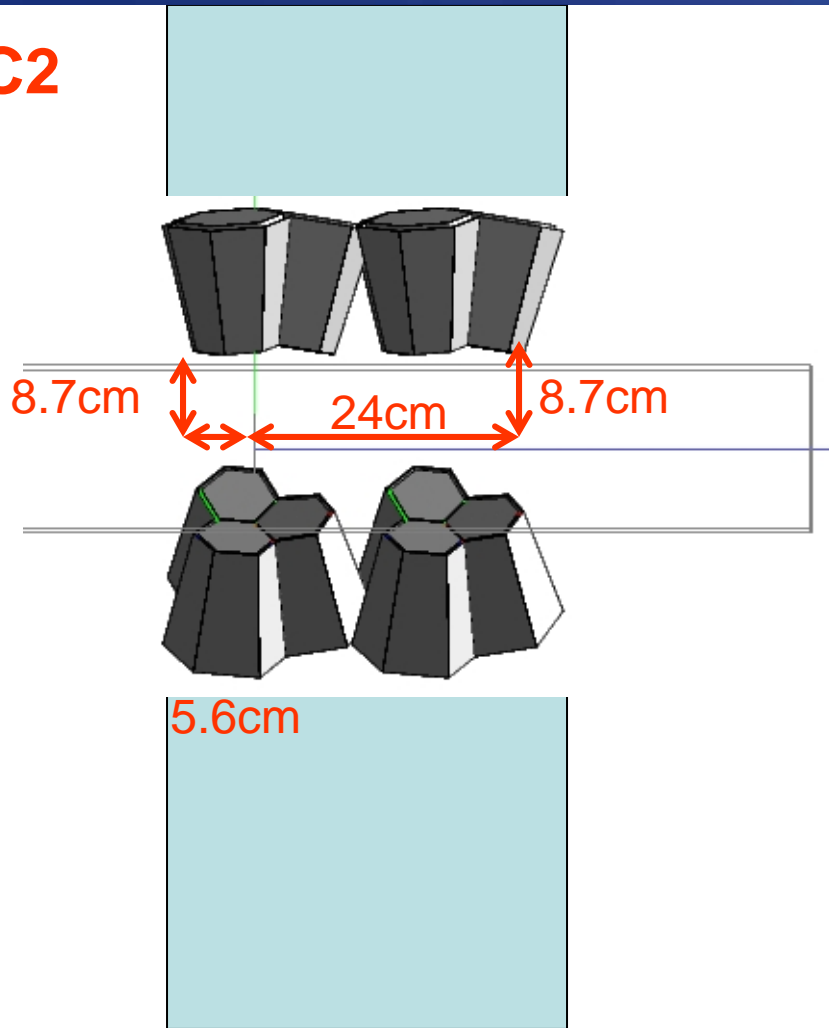



Solid angle occupied and free

C2

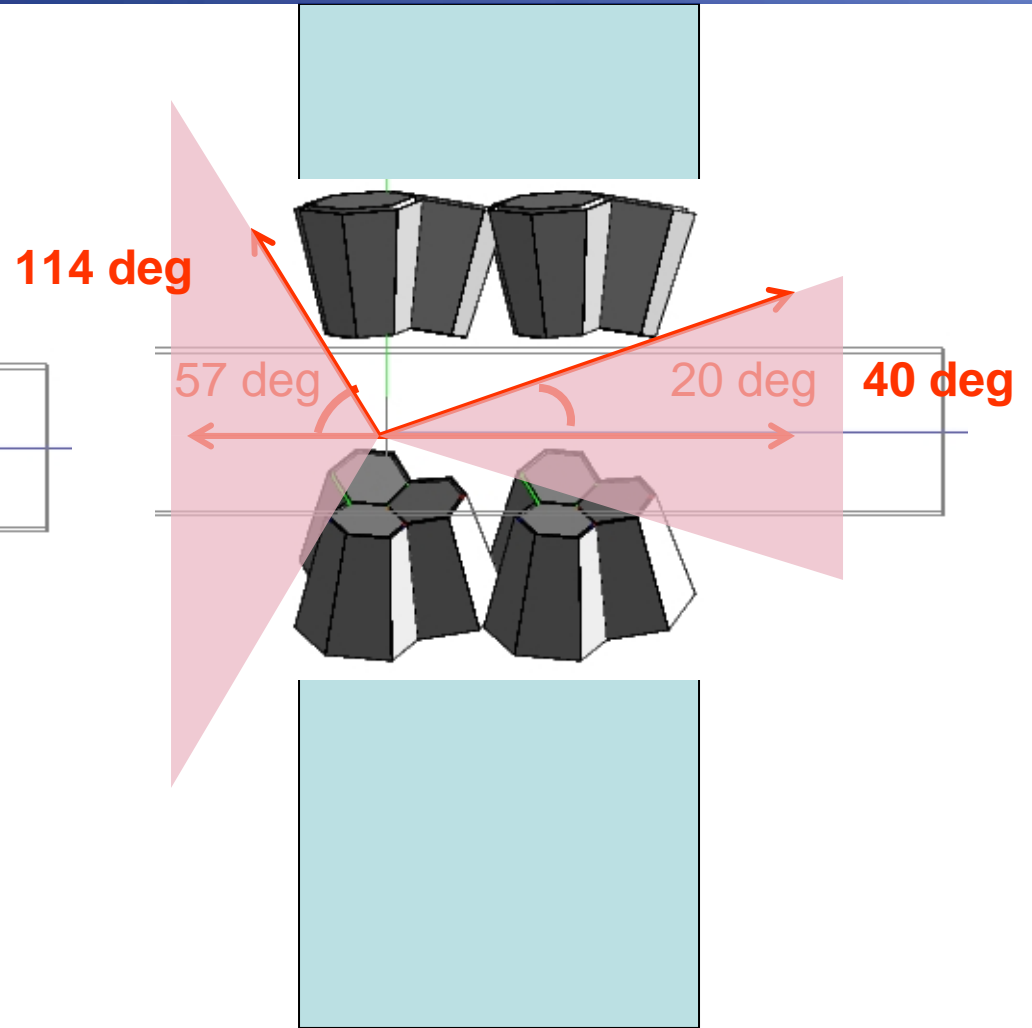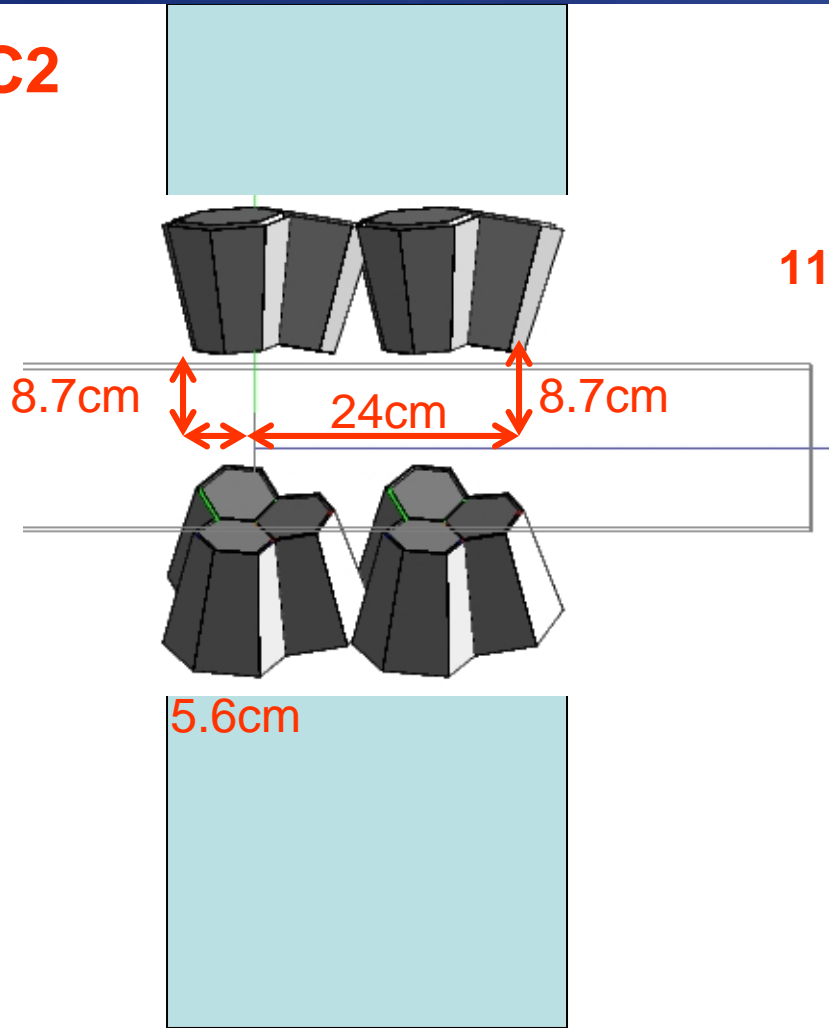



Solid angle occupied and free

S3

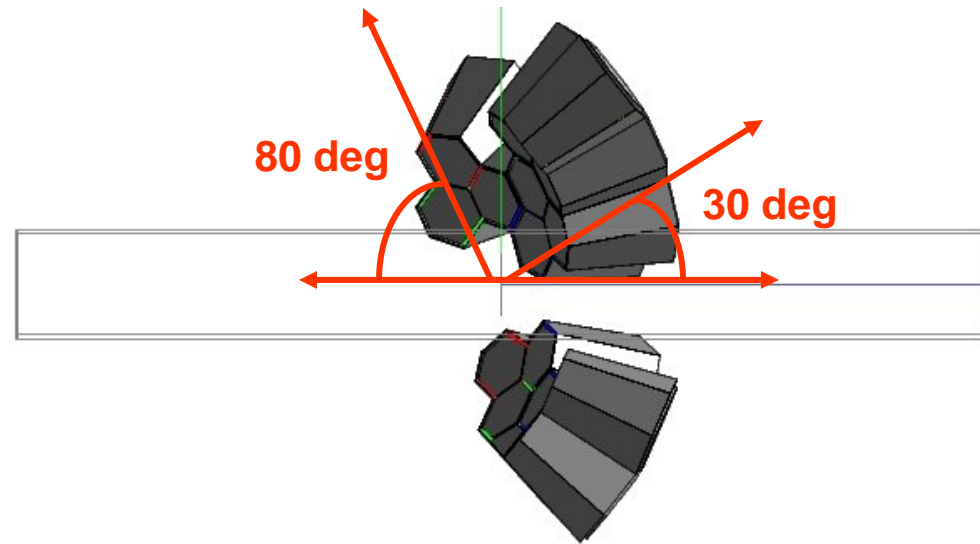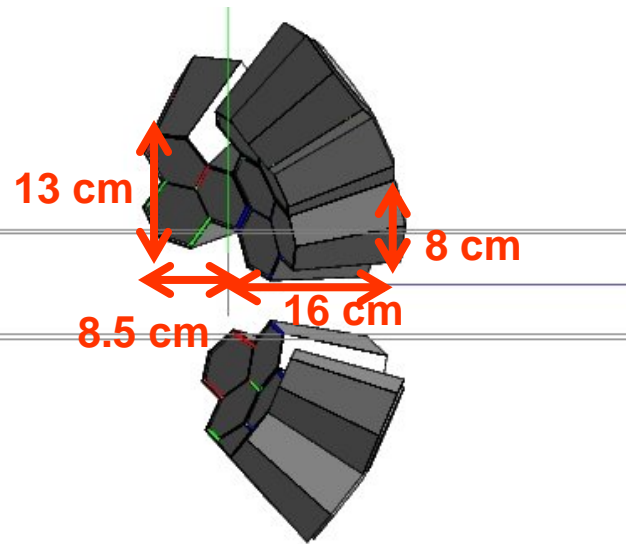


Solid angle occupied and free

S3

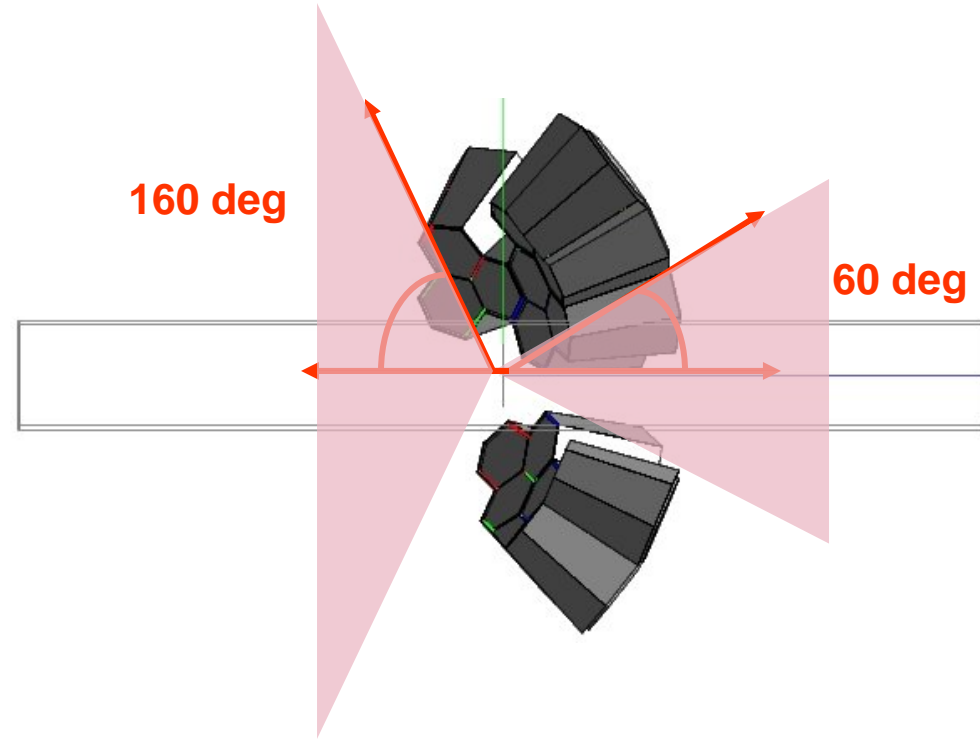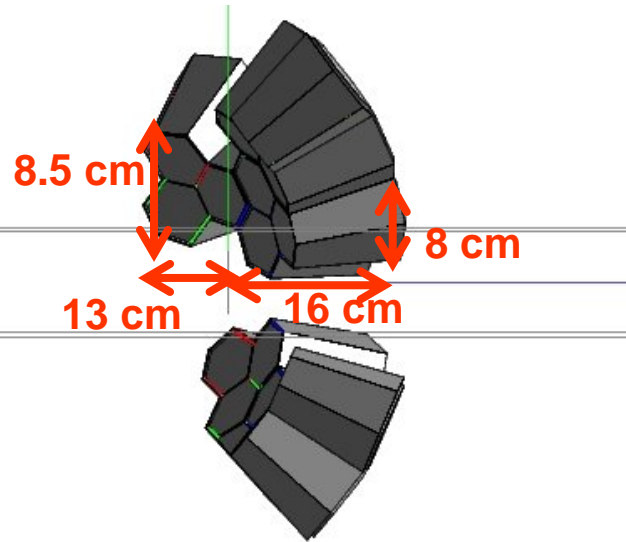


Solid angle occupied and free

S3

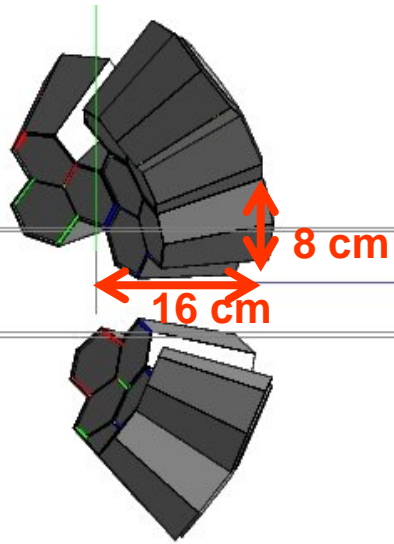

160 deg

60 deg

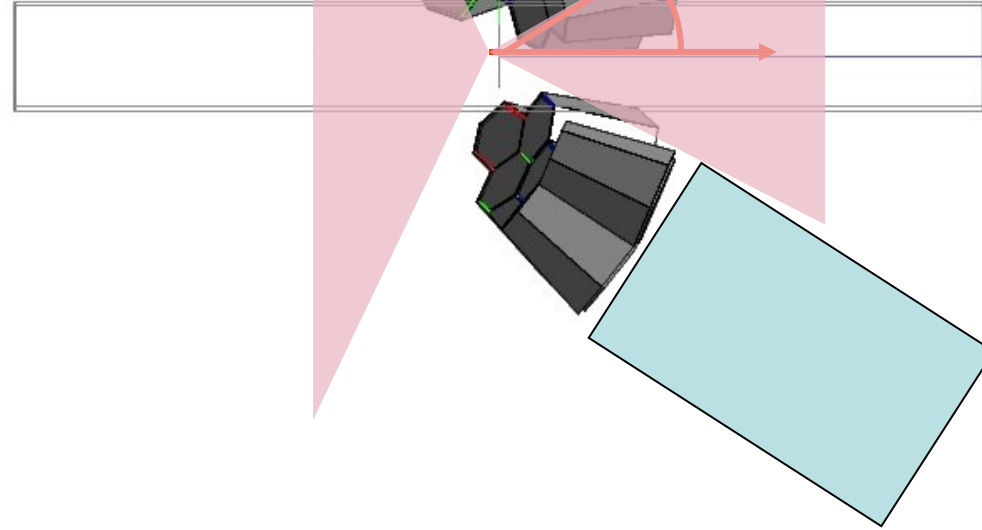

Solid angle occupied and free


C2

114 deg

57 deg

20 deg


40 deg

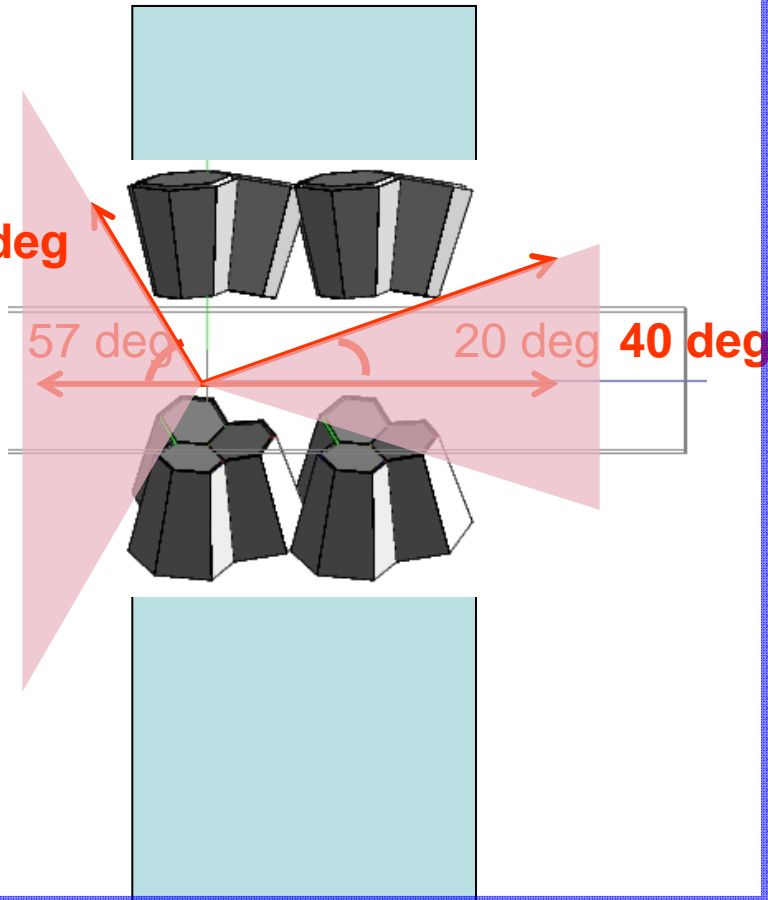

S3


160 deg

60 deg

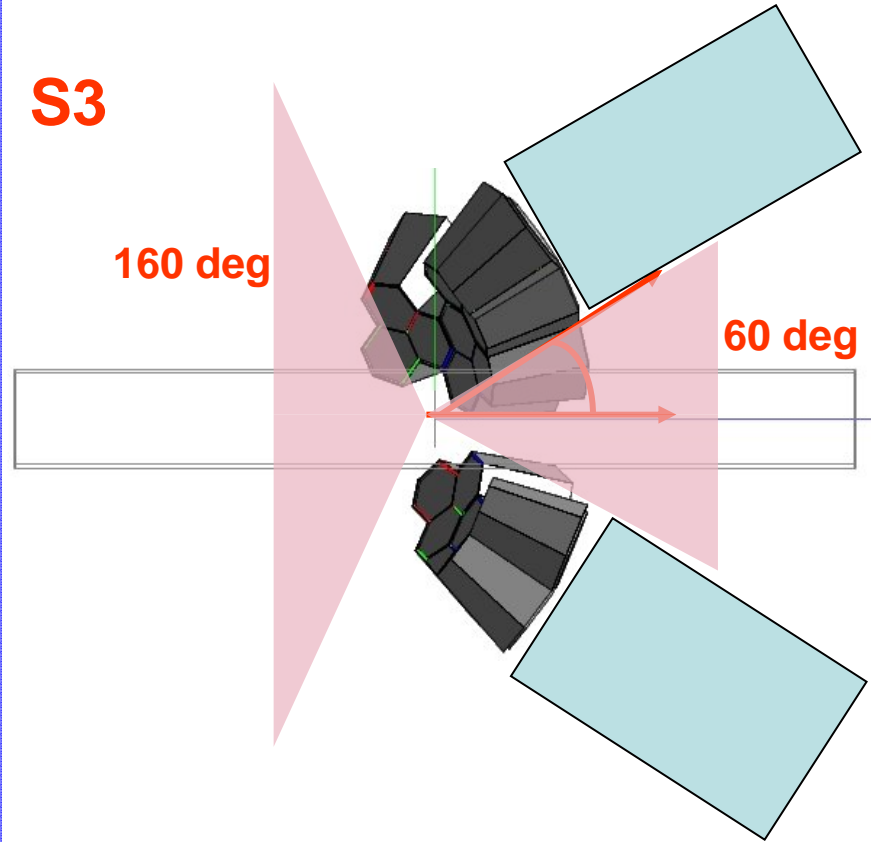

Compatibility with other detection systems

AGATA S3 + Rising

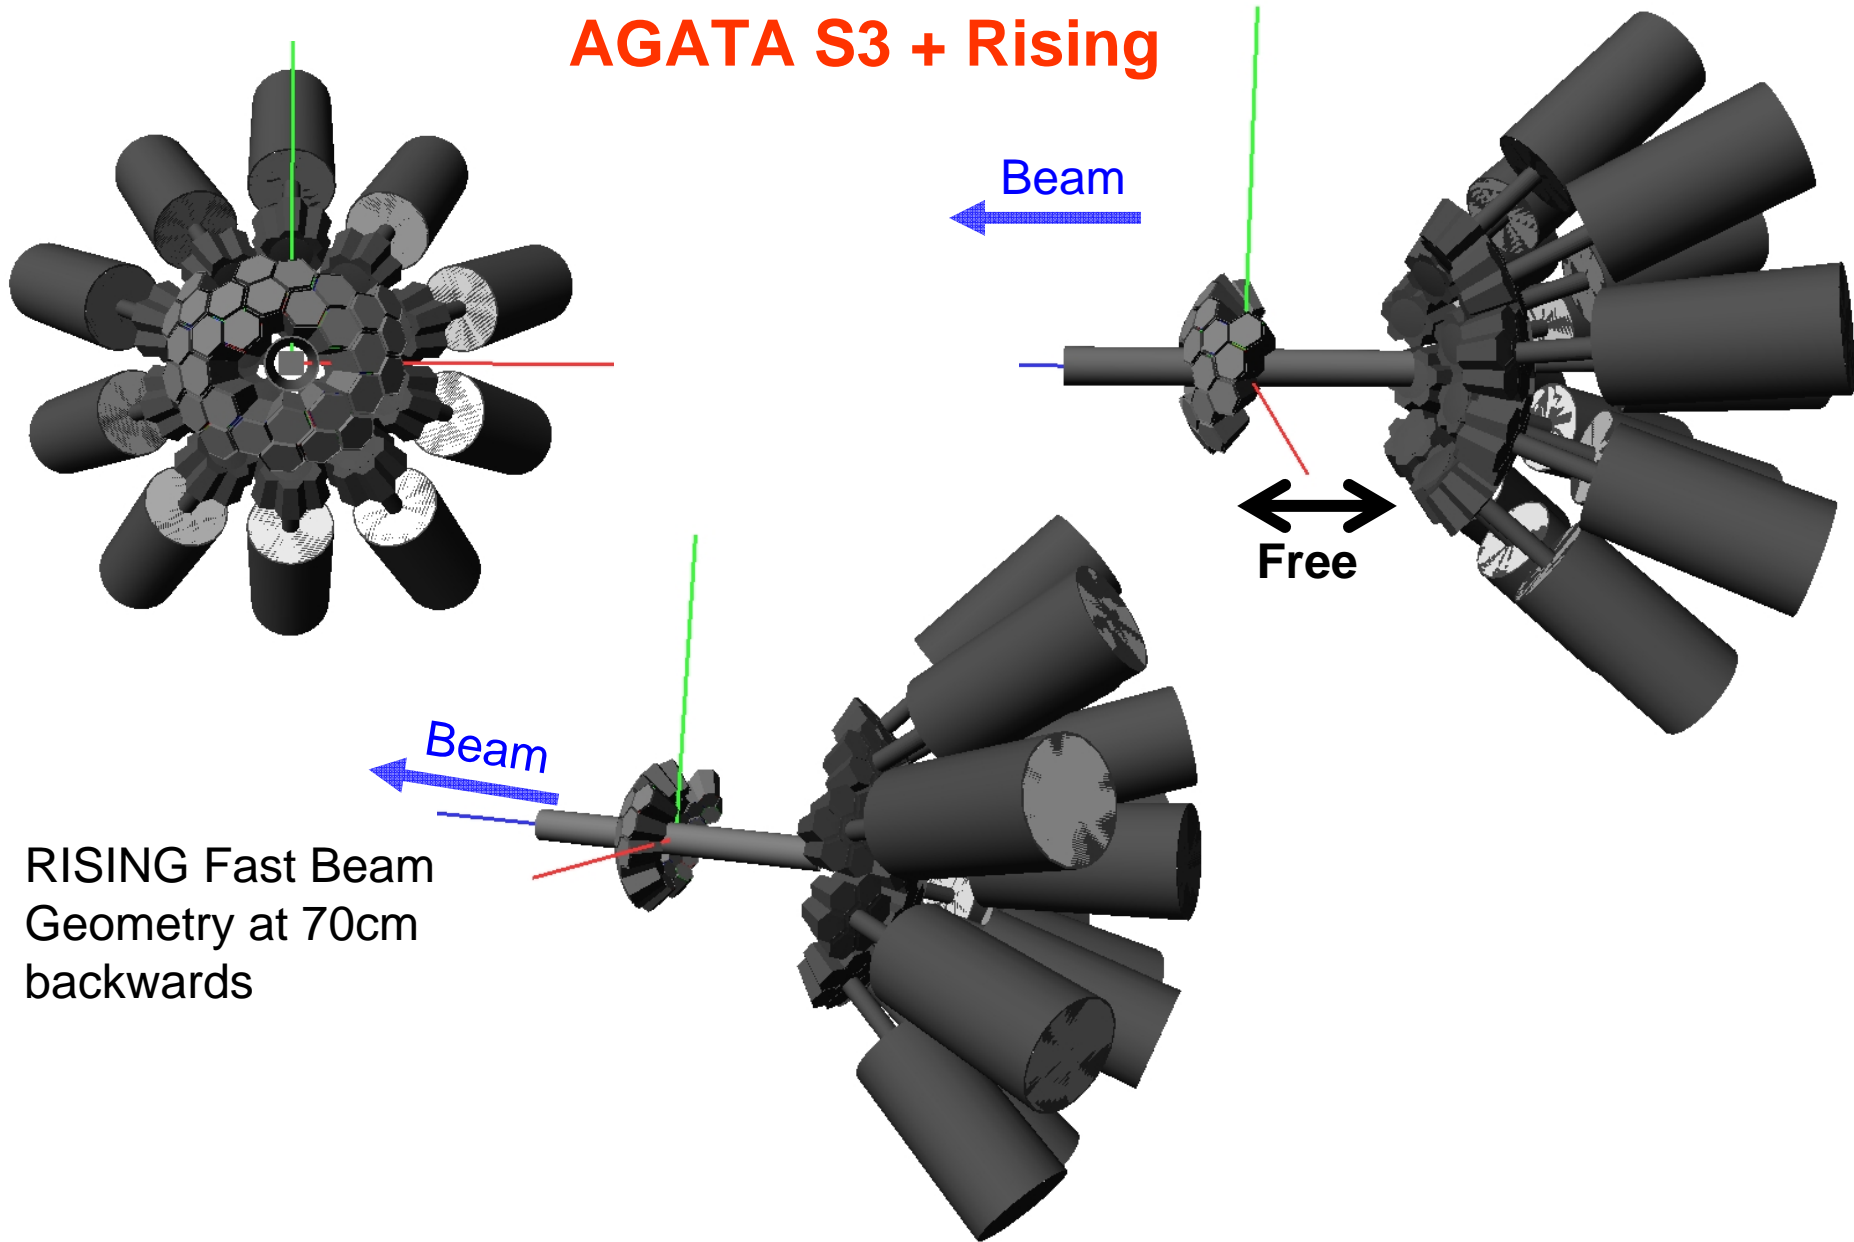


RISING Fast Beam
Geometry at 70cm
backwards



RISING Geant4 Geometry courtesy of Pavel Detistov

Compatibility with other detection systems

AGATA C2 + Rising

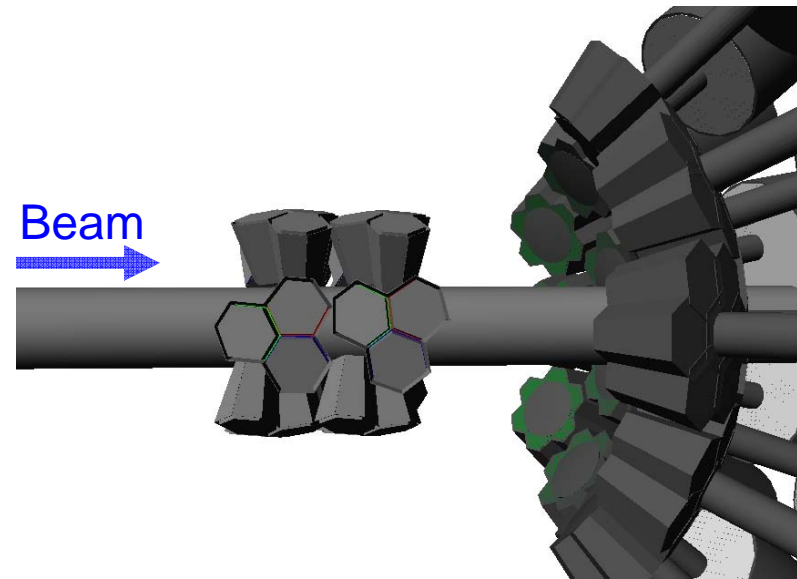


RISING Fast Beam
Geometry at 70 cm
forwards

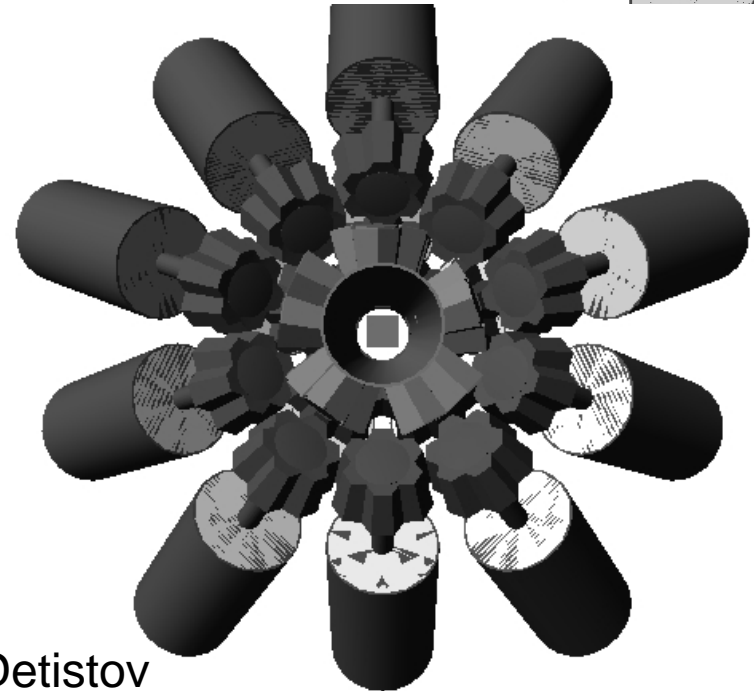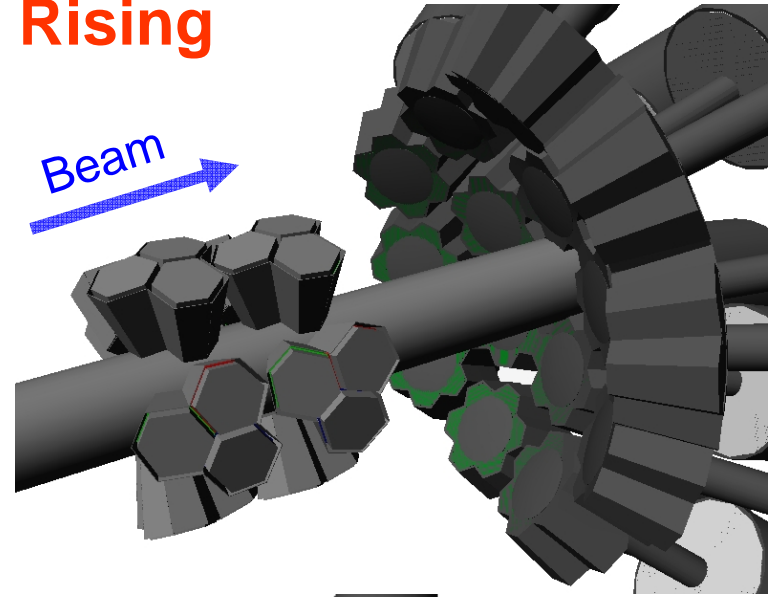


RISING Geant4 Geometry courtesy of Pavel Detistov


Compatibility with other detection systems

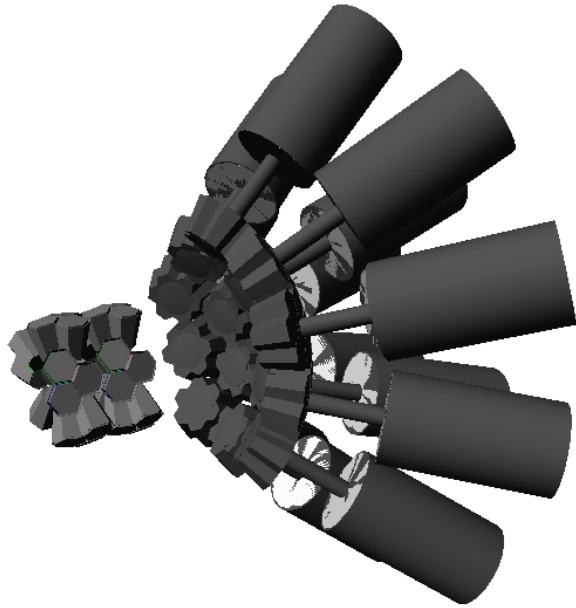

RISING Fast Beam
Geometry at 70 cm
forwards

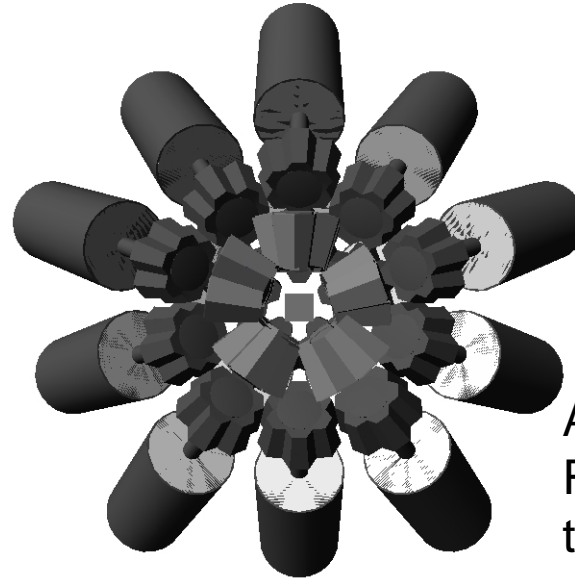

At least the inner ring of
RISING is visible from the
target position, 1% gain in
efficiency (?)

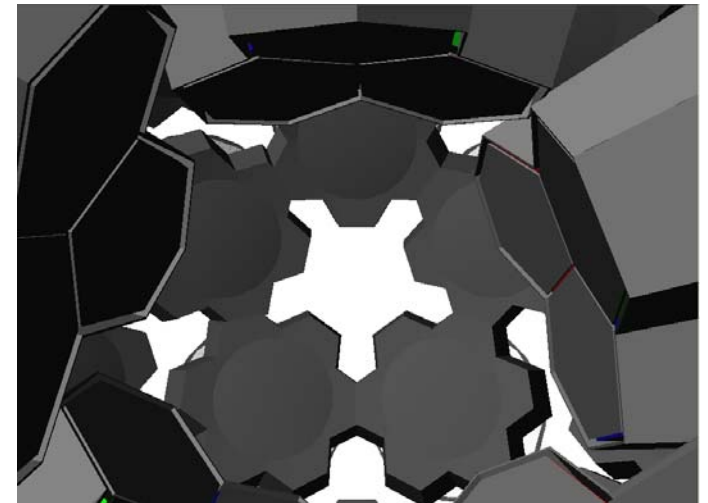


Outline


- Particular constraints for the setup at GSI
- Geometries: shell and compact setups
- Performance comparison
- Viability of additional γ -ray detectors: RISING, HECTOR, etc
- **Gain in performance from 10 to 12 Clusters**
- Outlook and conclusion

S- and C-Geometry Performance 12 Clusters


S3





C2

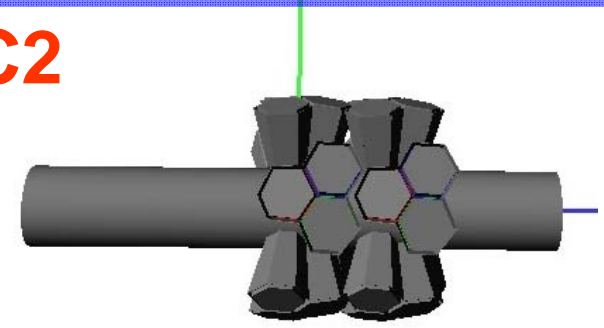

S3 + 2Clusters

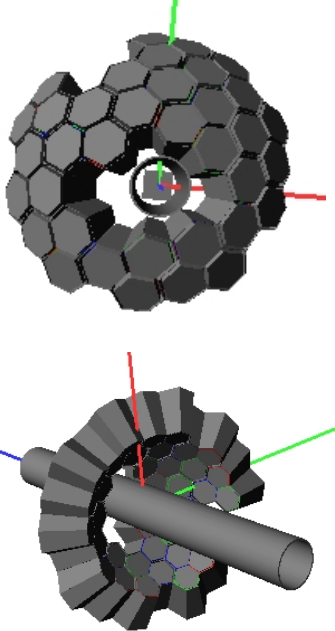


C2 + 2 Clusters

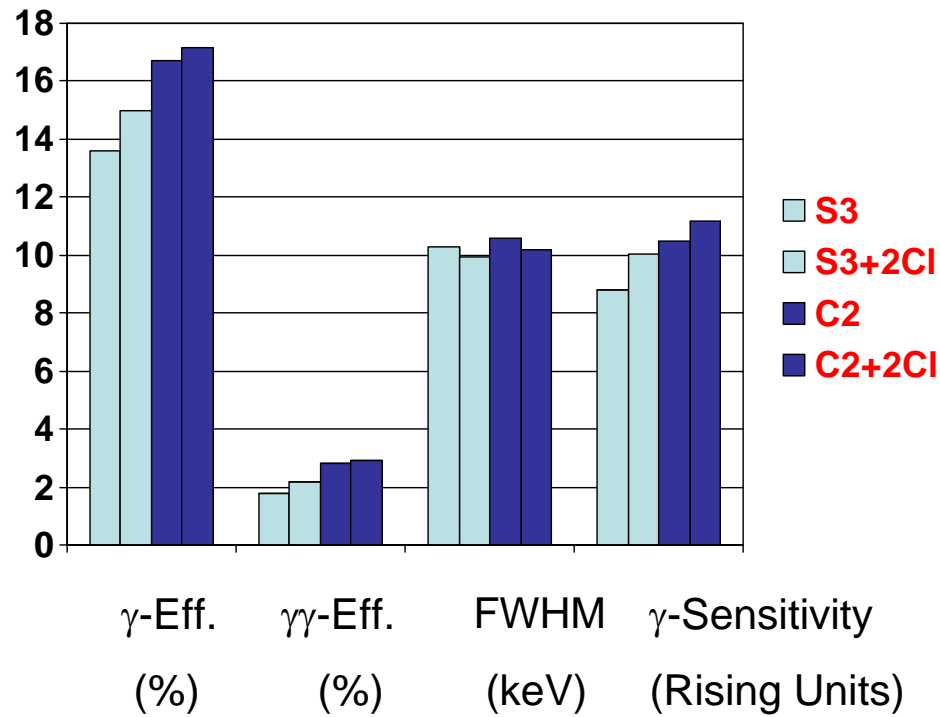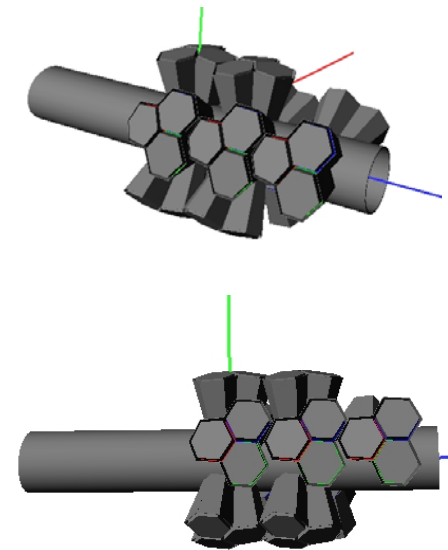


S- and C-Geometry Performance, Quantitative Comparison


S3





C2

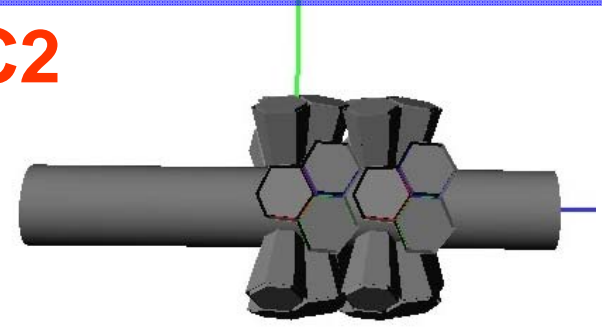

S3 + 2Clusters

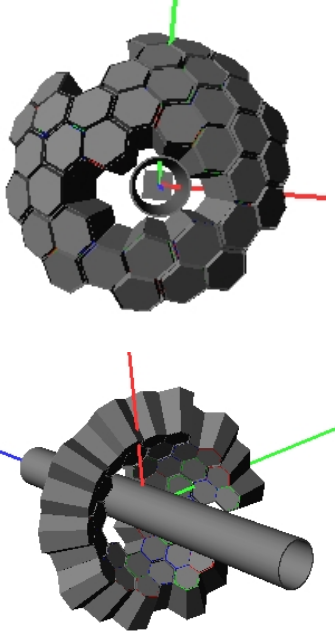

C2 + 2 Clusters

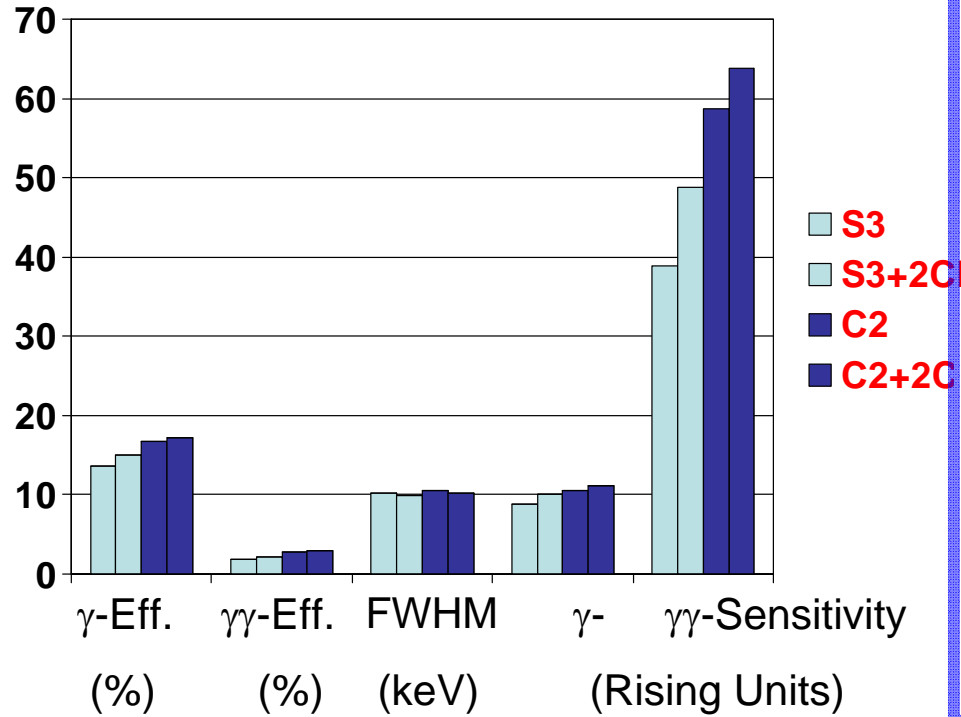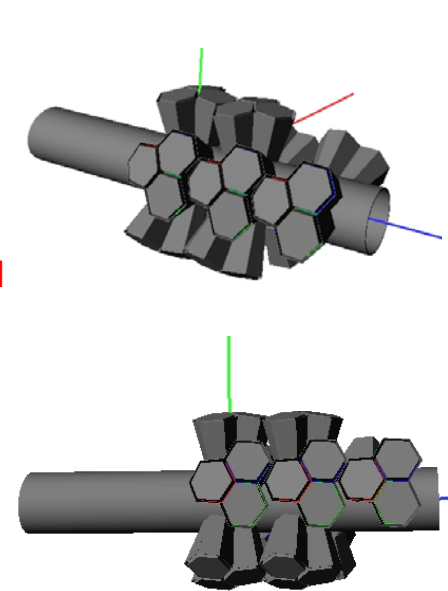

Outline

- Particular constraints for the setup at GSI
- Geometries: shell and compact setups
- Performance comparison
- Viability of additional γ -ray detectors: RISING, HECTOR, etc
- Gain in performance from 10 to 12 Clusters
- Outlook and conclusion

Outlook and conclusion

1. There are two geometry options (S3 and C2) which show an enormous boost in performance when compared to RISING, thus increasing the γ -ray sensitivity by about one order of magnitude in both cases.
2. The compact version C2 shows substantially higher efficiency (16.7%) compared to the S3 shell geometry (13.6%).
(Absolute difference 3.1%, relative difference 23%.)
3. The $\gamma\gamma$ -sensitivity of the C2 geometry is 1.5 times larger than that of the S3 shell.
(In Rising units, 60 and 40, respectively.)
4. The energy resolution of the C2 geometry is slightly worse (0.3 keV higher) than that of S3.
(The values for the ref. case simulated are 10.6 keV and 10.3 keV, respectively.)
5. The angular range covered by C2 is about 20deg larger than that of S3.
(S3 covers from 35deg to 90deg, C2 covers from 25deg to 105deg).
6. From the technical point of view, S3 requires a smaller beam pipe (about 11 cm diameter). C2 is compatible with the GSI standard pipe of 16cm.

List of Tasks for the Working Group (17.07.2009)

Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole
- Task 2: S3 + 1 Double Cluster detector closing part of the central hole (10-11 cm?). Remains shell with 4 crystals hole + pentagon hole.
- Task 3: previous + 4 Triple Clusters enlarging shell (for case one has 15 Clusters available).
- Task 4: C2 geometry, with clusters in 2nd ring pointing to target, and 3rd ring (15 Clusters total)

Physics cases evaluate realistically the performance of the optimal detection system in:

- Task 1: Coulex experiment. Example: Coulex of ^{104}Sn at 100 MeV/u on a 0.4 g/cm² Au-target. Primary beam ^{124}Xe .
- Task 2: Fragmentation experiment. ^{54}Ni at 100 MeV/u + Be (0.7 g/cm²) -> ^{50}Fe (simulate first 4 excited states up to 8+ level).
- Task 3: Plunger experiment (A. Dewald, Chr. Fransen Uni. Koeln). Emphasis on angular distribution and contribution of RISING at forward angles

Realistic implementation


- Task 1: Background model or scaled background spectra from prev. experiments
- Task 2: Realistic tracking for event reconstruction (mgt, etc)

New results: AGATA S2 + Agata Double Cluster Array (ADCA)

Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole

AGATA S2 Geometry

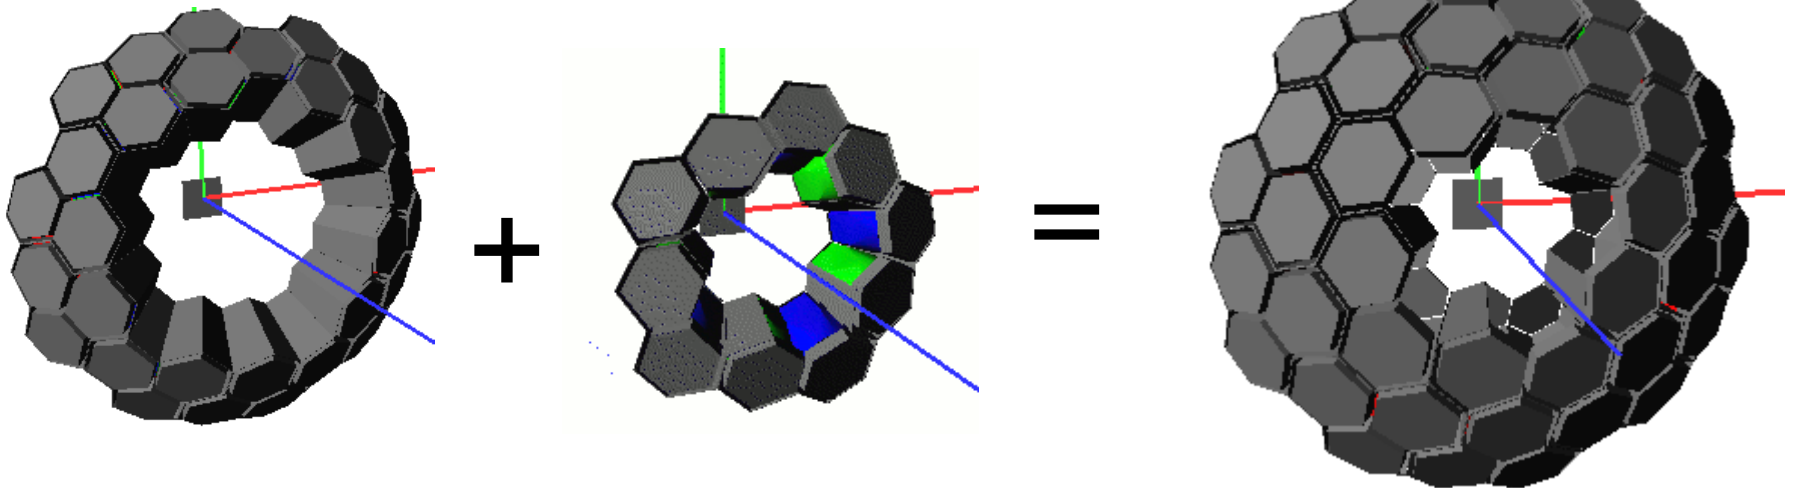

10 triple Cluster


+

5 double Cluster

New results: AGATA S2 + Agata Double Cluster Array (ADCA)

Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole

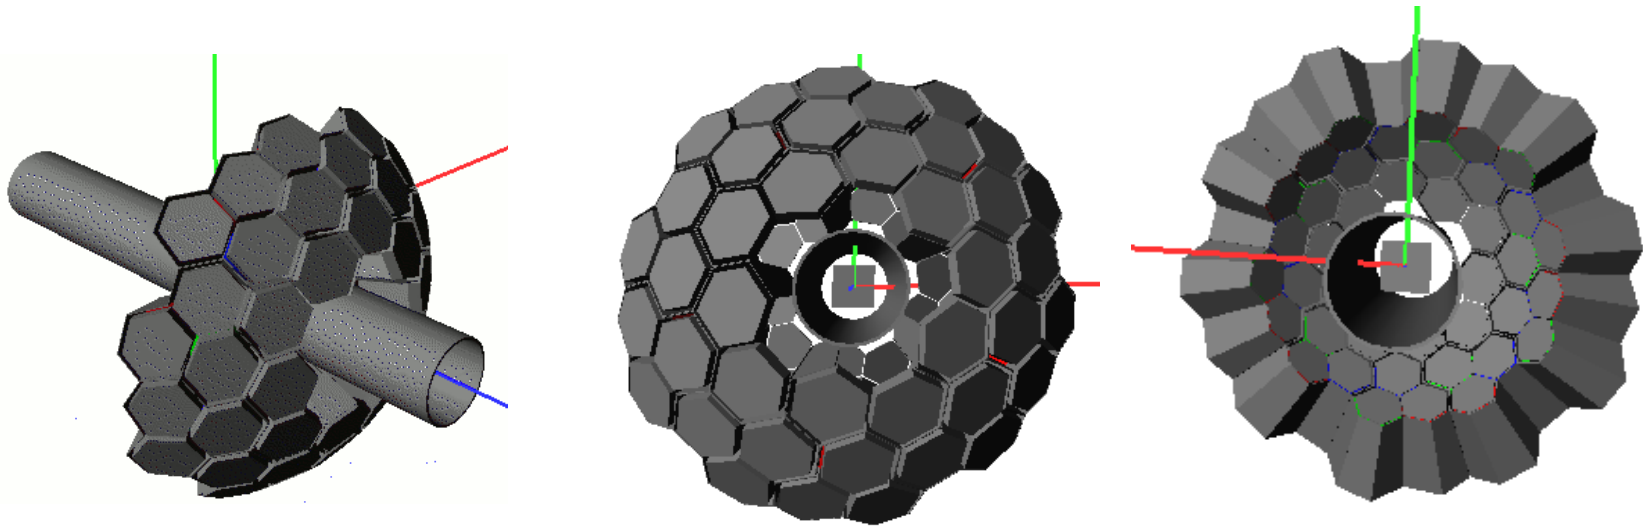


Beam pipe diameter = 13 cm

New results: AGATA S3 + 1 Agata Double Cluster

Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole
- Task 2: S3 + 1 Double Cluster detector closing part of the central hole (10-11 cm?). Remains shell with 4 crystals hole + pentagon hole.

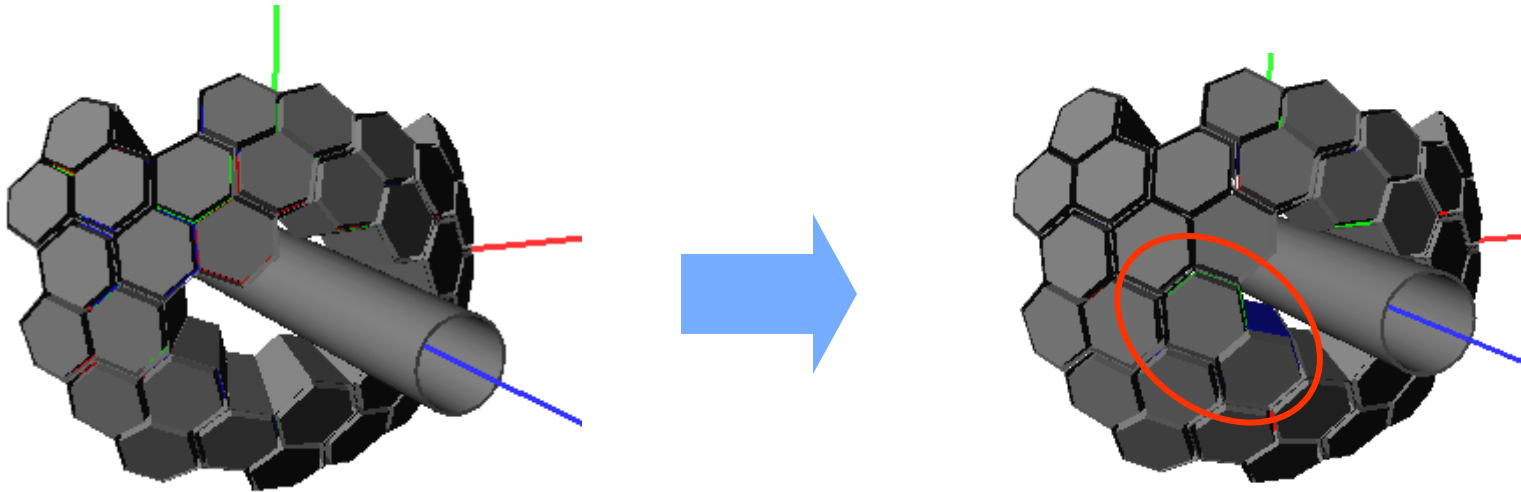

10 triple Cluster (Asym)


+

1 **double** Cluster


Beam pipe diameter = 11 cm

S-Geometries Performance comparison: Efficiency


S1




S2




S3




Photopeak Efficiency vs distance

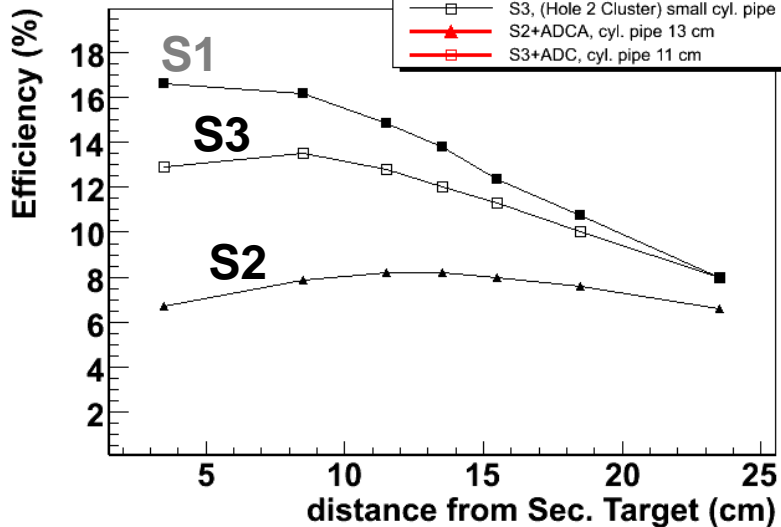


S2'










γ - γ Efficiency

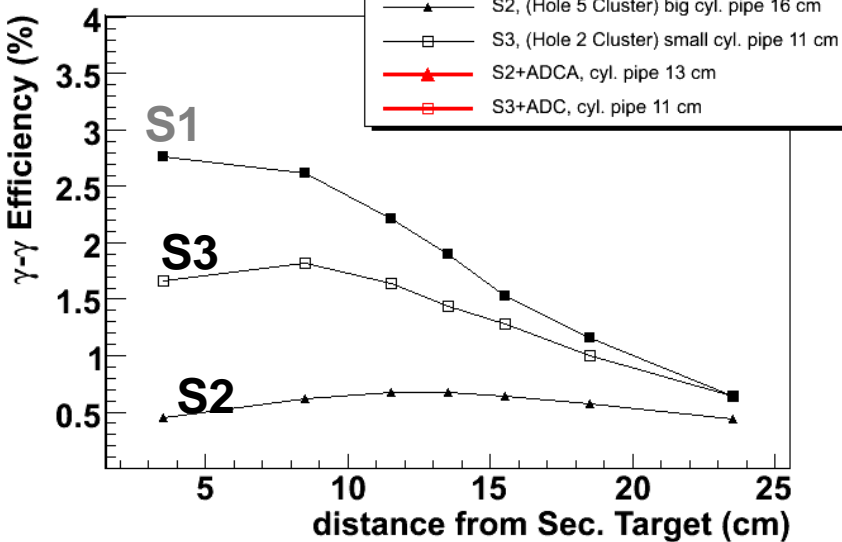

S3'




S-Geometries Performance comparison: Efficiency

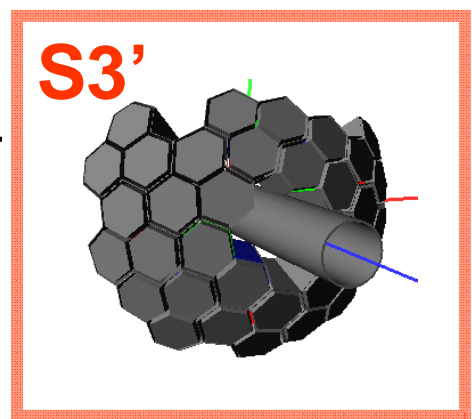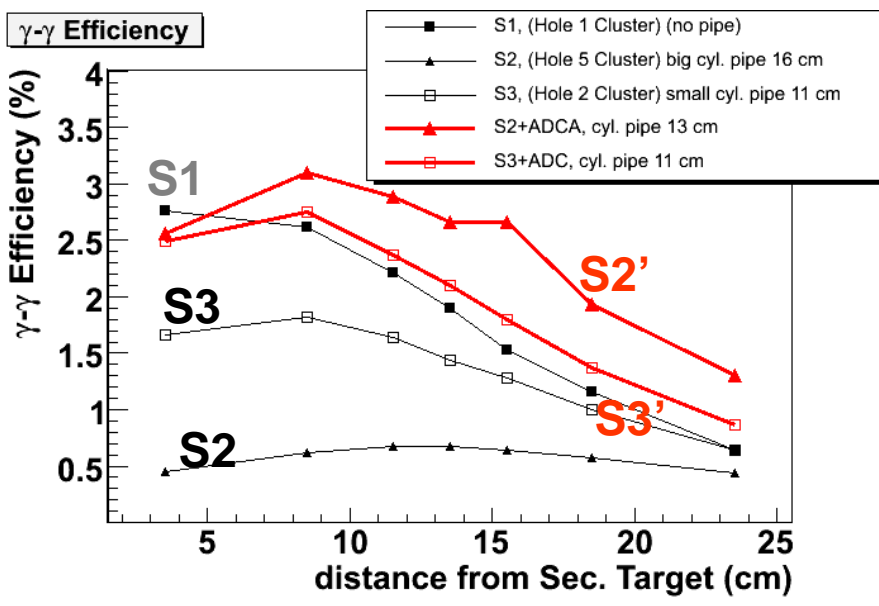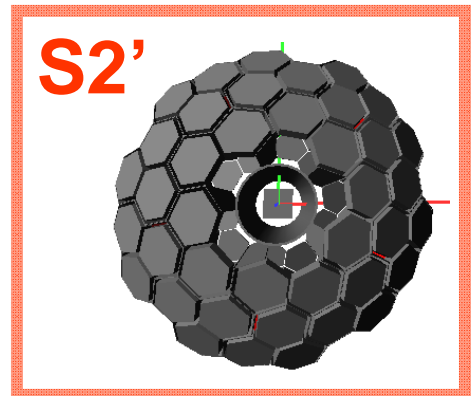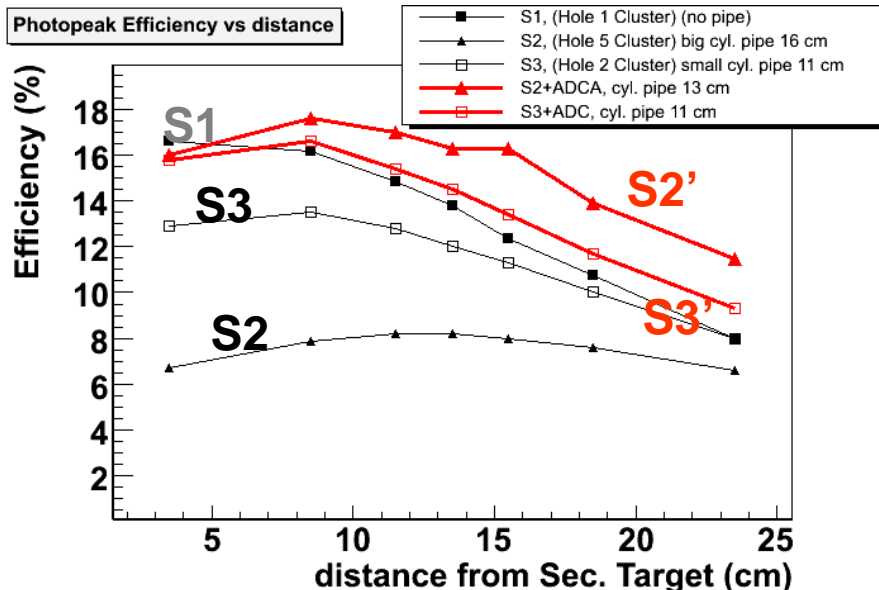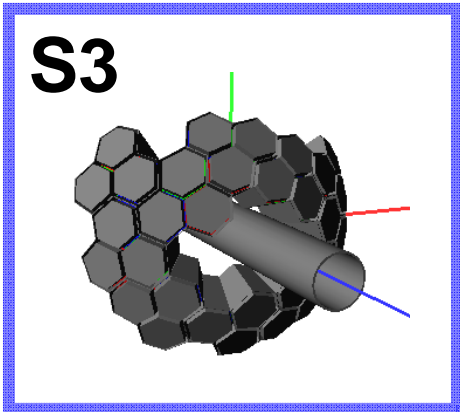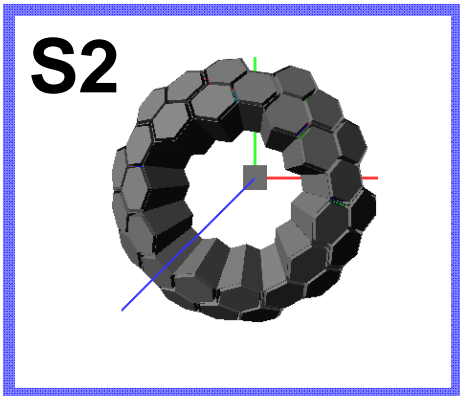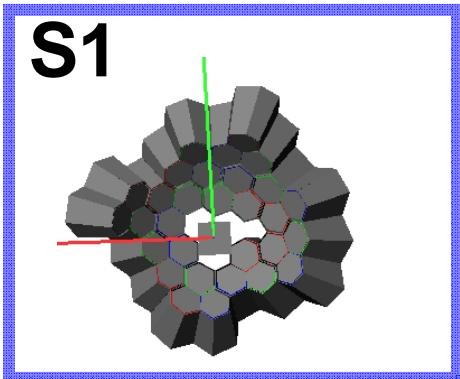


S-Geometries Performance comparison: Resolution



S1





S2




S3

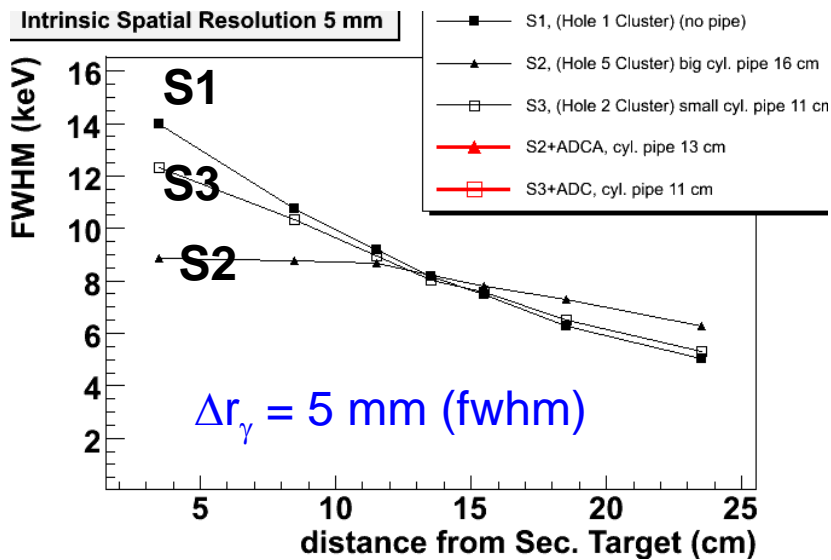

S2'

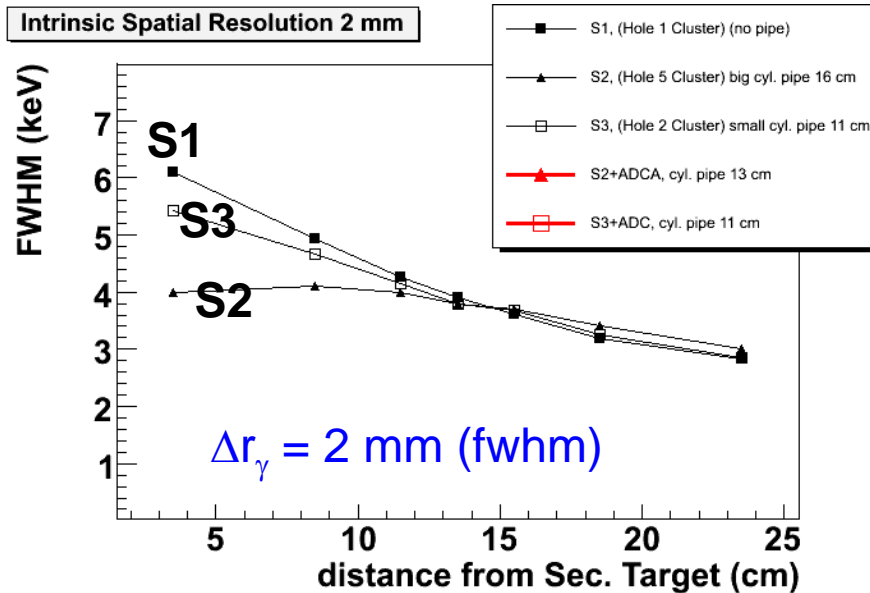


S3'




S-Geometries Performance comparison: Resolution


S1




S2




S3




Intrinsic Spatial Resolution 5 mm

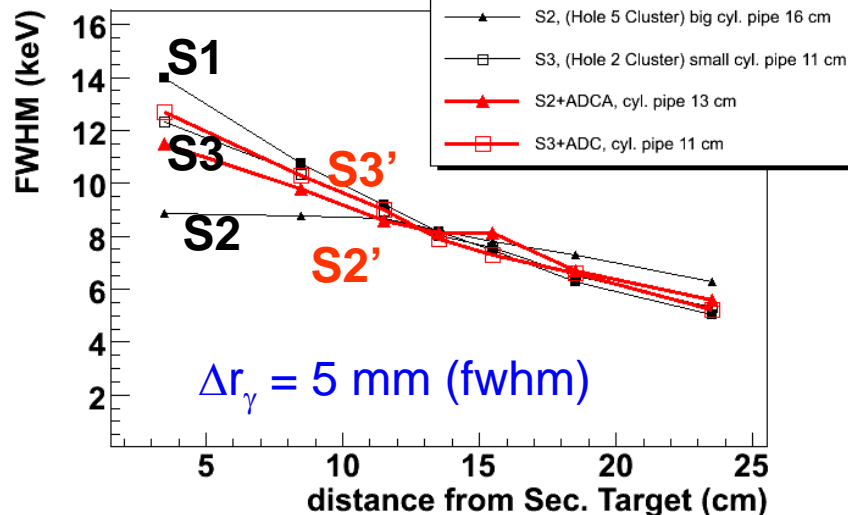


S2'



Intrinsic Spatial Resolution 2 mm

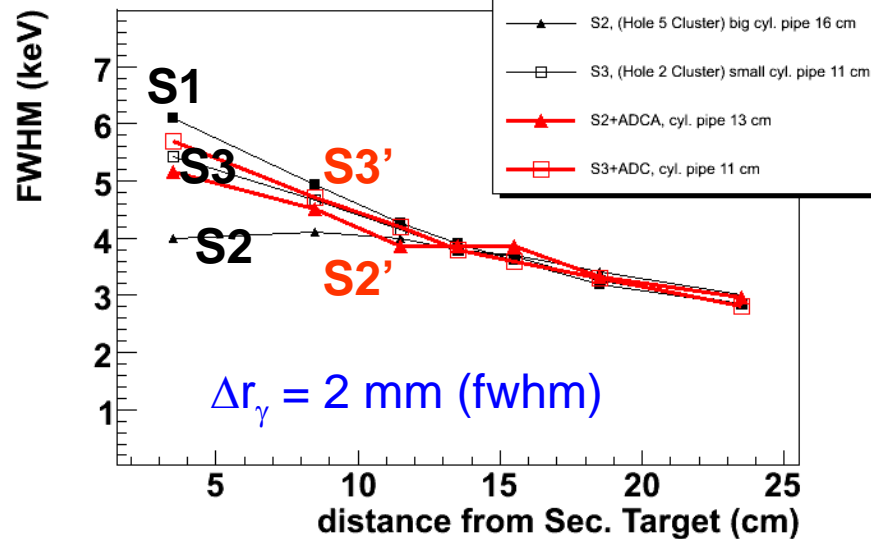


S3'




Shell Geometries performance comparison: Summary



S1




S2





S3

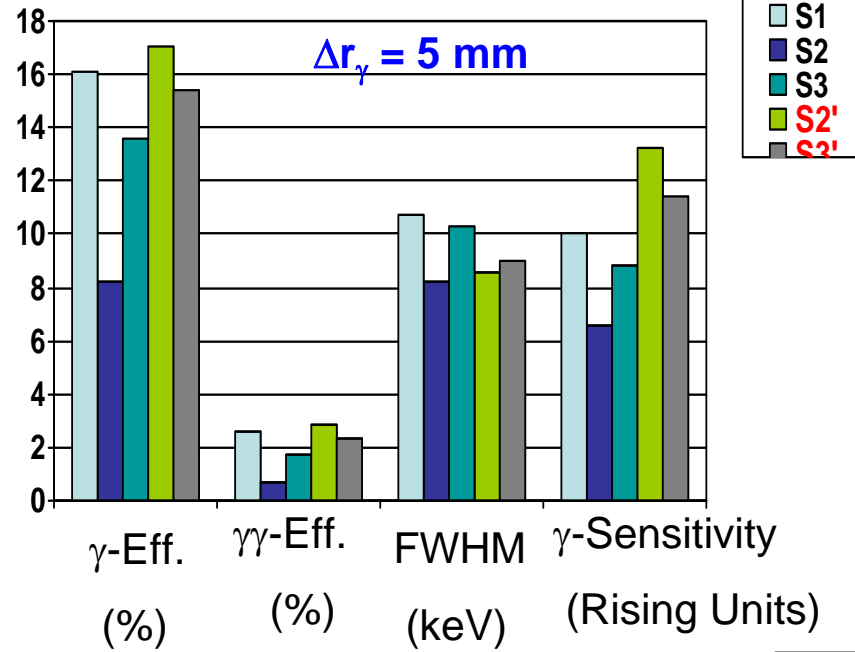

S2'




S3'

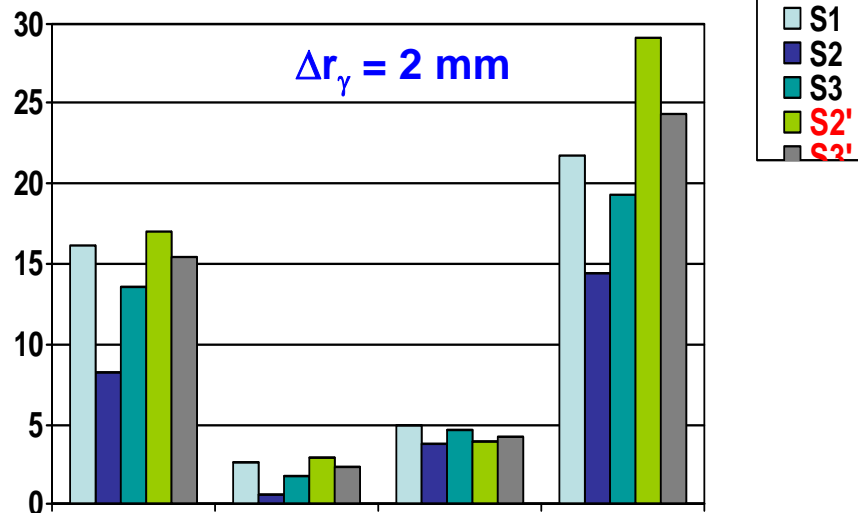



S- and C-Geometry Performance, Quantitative Comparison





S3



C2

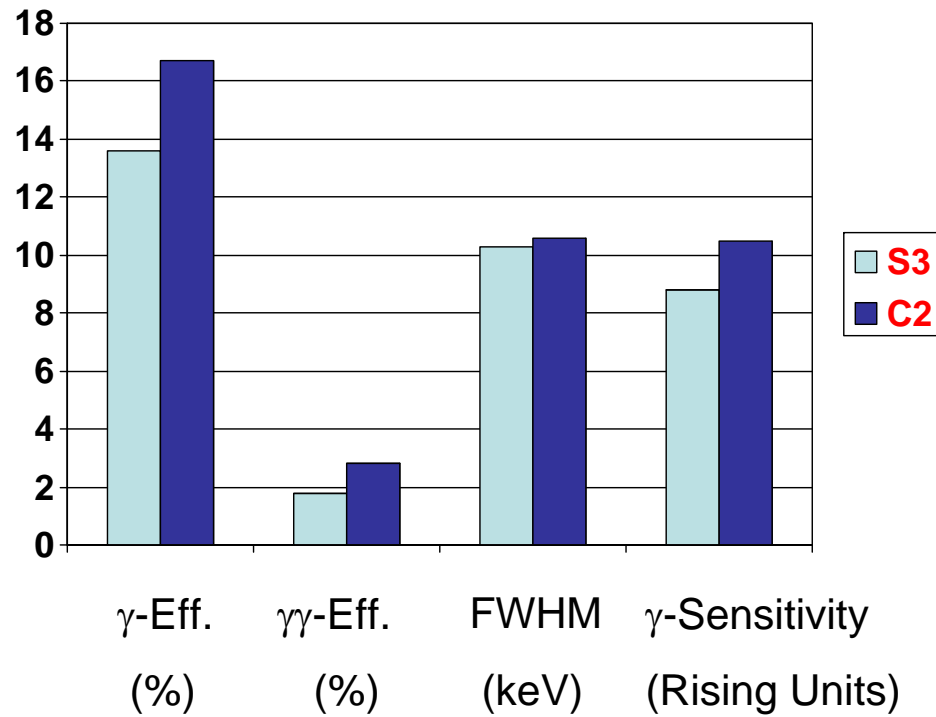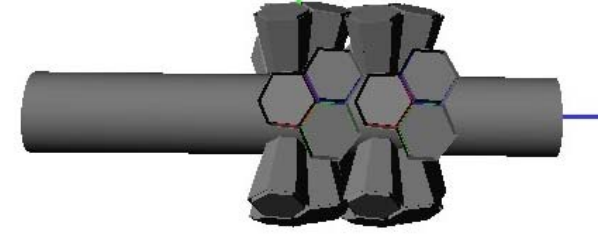

S- and C-Geometry Performance, Quantitative Comparison

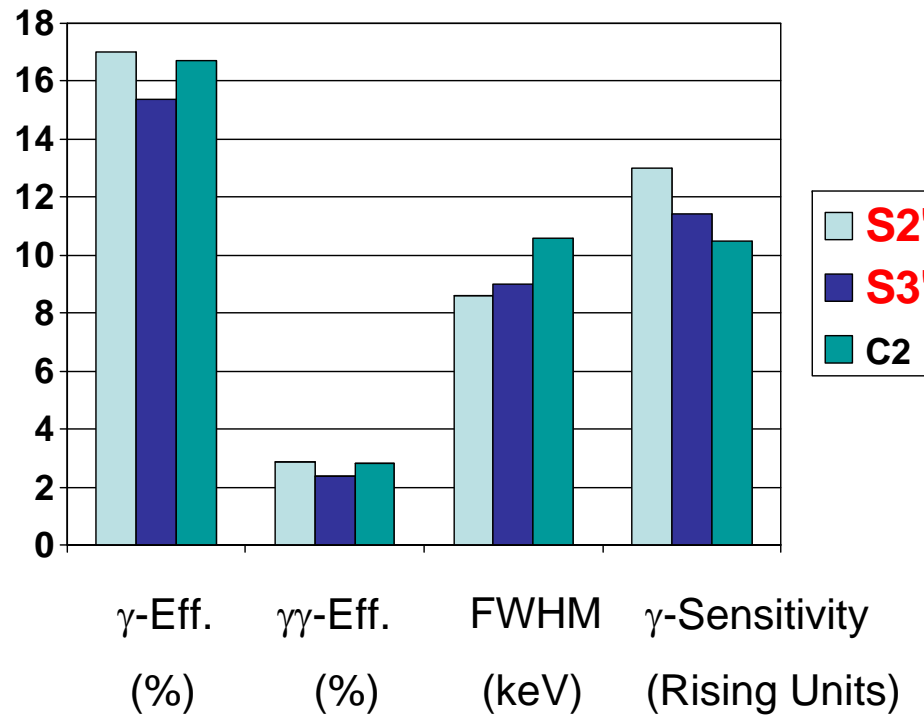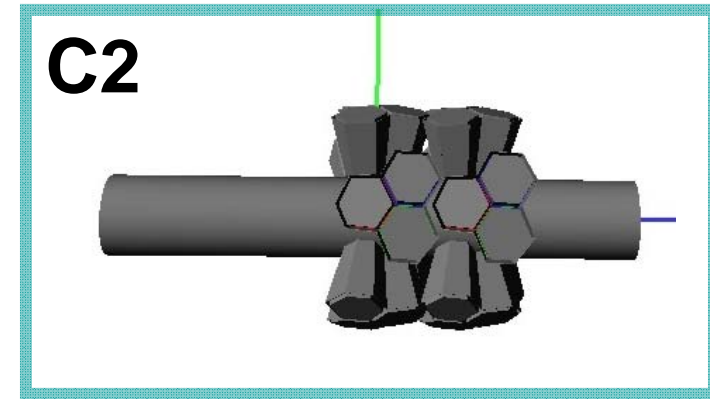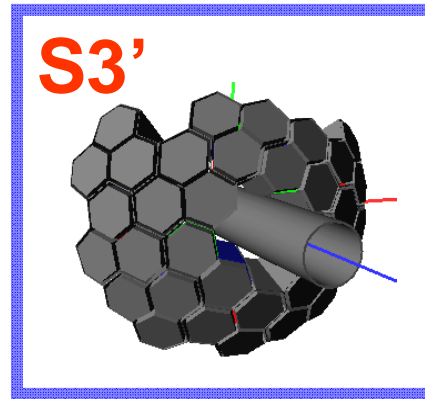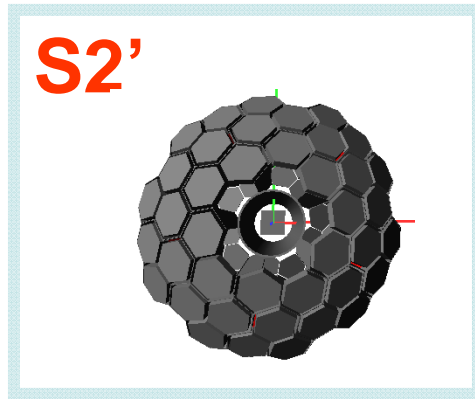

List of Tasks for the Working Group (17.07.2009)



Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole
- Task 2: S3 + 1 Double Cluster detector closing part of the central hole (10-11 cm?). Remains shell with 4 crystals hole + pentagon hole.
- Task 3: previous + 4 Triple Clusters enlarging shell (for case one has 15 Clusters available).
- Task 4: C2 geometry, with clusters in 2nd ring pointing to target, and 3rd ring (15 Clusters total)


Conclusion:

- Provided that 10 ATC detectors and 1 “ADC” detector (or more) are available, then a shell geometry (S3’ or S2’) shows a superior performance than any other possible cylindrical geometry (e.g. C2).
- Typical γ -ray efficiencies between 14% and 17% can be achieved, which in combination with resolutions (FWHM) of 8-9 keV will provide a γ -ray sensitivity of more than 10 times the RISING sensitivity.

Realistic Tracking (mgt)

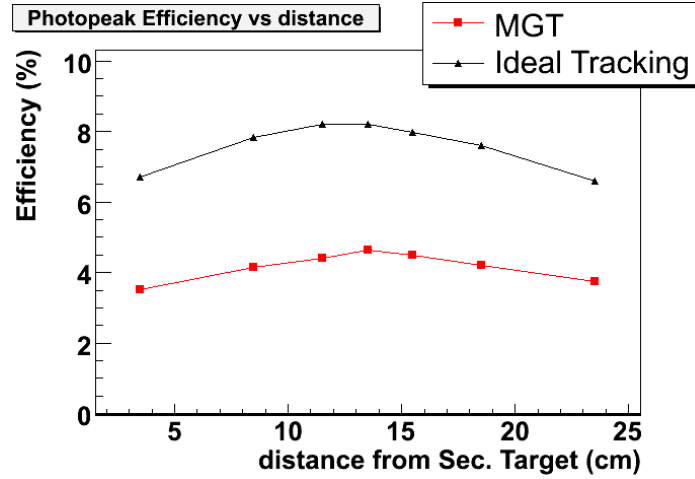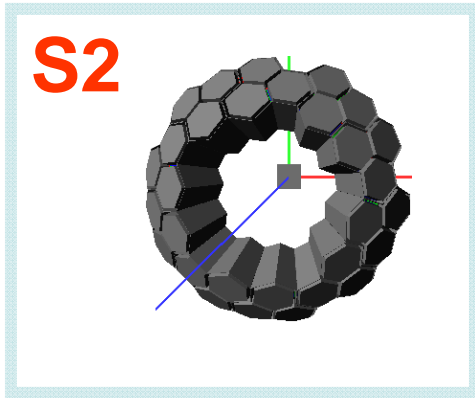

50% lower efficiency

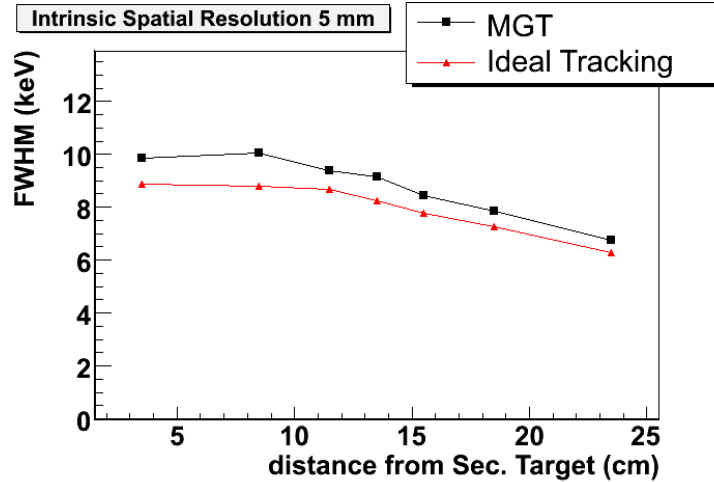

10% worse resolution

List of Tasks for the Working Group (17.07.2009)

Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole
- Task 2: S3 + 1 Double Cluster detector closing part of the central hole (10-11 cm?). Remains shell with 4 crystals hole + pentagon hole.
- Task 3: previous + 4 Triple Clusters enlarging shell (for case one has 15 Clusters available).
- Task 4: C2 geometry, with clusters in 2nd ring pointing to target, and 3rd ring (15 Clusters total)

Conclusion:

- Provided that 10 ATC detectors and 1 “ADC” detector (or more) are available, then a shell geometry (S3’ or S2’) shows a superior performance than any other possible cylindrical geometry (e.g. C2).
- REALISTIC γ -ray efficiencies between 7% and 9% can be achieved, which in combination with resolutions (FWHM) of 9-10 keV will provide a γ -ray sensitivity of more than 5 times the RISING sensitivity.

List of Tasks for the Working Group (17.07.2009)

Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole
- Task 2: S3 + 1 Double Cluster detector closing part of the central hole (10-11 cm?). Remains shell with 4 crystals hole + pentagon hole.
- Task 3: previous + 4 Triple Clusters enlarging shell (for case one has 15 Clusters available).
- Task 4: C2 geometry, with clusters in 2nd ring pointing to target, and 3rd ring (15 Clusters total)

Physics cases evaluate realistically the performance of the optimal detection system in:

- Task 1: Coulex experiment. Example: Coulex of ^{104}Sn at 100 MeV/u on a 0.4 g/cm² Au-target. Primary beam ^{124}Xe .
- Task 2: Fragmentation experiment. ^{54}Ni at 100 MeV/u + Be (0.7 g/cm²) -> ^{50}Fe (simulate first 4 excited states up to 8+ level).
- Task 3: Plunger experiment (A. Dewald, Chr. Fransen Uni. Koeln). Emphasis on angular distribution and contribution of RISING at forward angles

Realistic implementation


- Task 1: Background model or scaled background spectra from prev. experiments
- Task 2: Realistic tracking for event reconstruction (mgt, etc)

List of Tasks for the Working Group (17.07.2009)

Physics cases evaluate realistically the performance of the optimal detection system in:

- Task 1: Coulex experiment. Example: Coulex of ^{104}Sn at 100 MeV/u on a 0.4 g/cm² Au-target. Primary beam ^{124}Xe .
- Task 2: Fragmentation experiment. ^{54}Ni at 100 MeV/u + Be (0.7 g/cm²) -> ^{50}Fe (simulate first 4 excited states up to 8+ level).
- Task 3: Plunger experiment (A. Dewald, Chr. Fransen Uni. Koeln). Emphasis on angular distribution and contribution of RISING at forward angles

Realistic MC Simulation of a **fragmentation** experiment

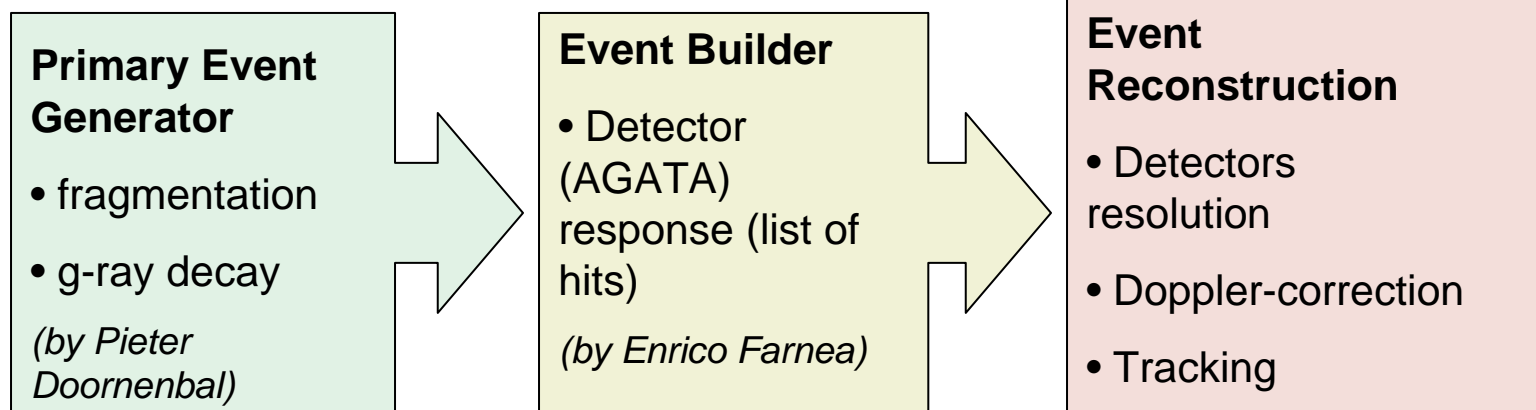

List of Tasks for the Working Group (17.07.2009)

Realistic MC Simulation of a **fragmentation** experiment

Primary Event Generator

- fragmentation
- g-ray decay









(by Pieter Doornenbal)

54Ni

@ 150 MeV/u

Be Target

(700mg/cm²)

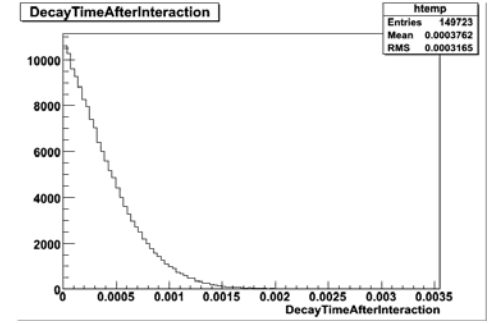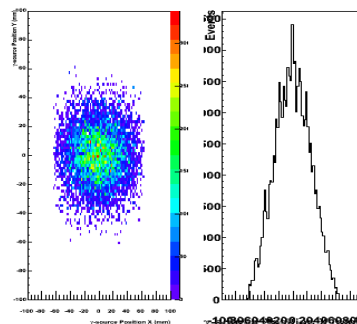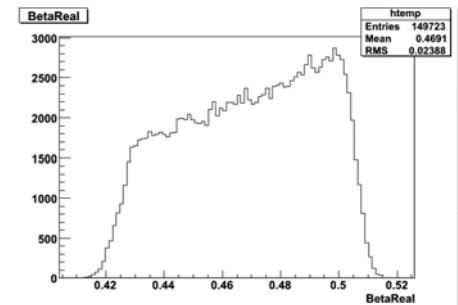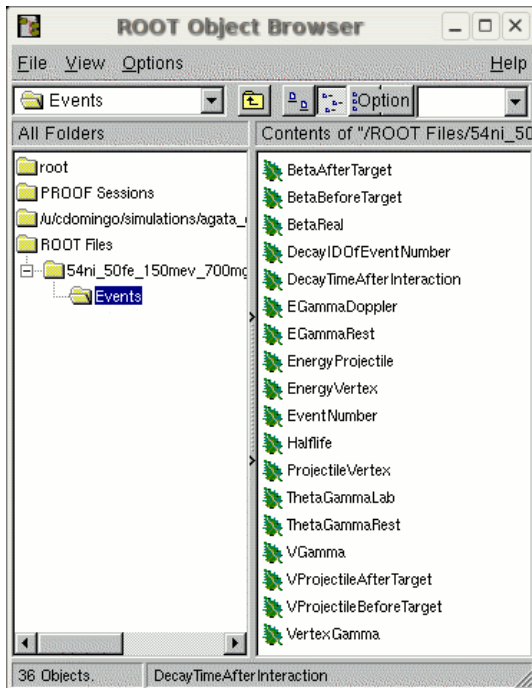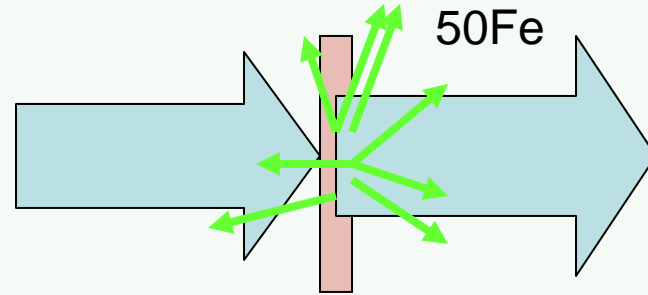

List of Tasks for the Working Group (17.07.2009)

Realistic MC Simulation of a **fragmentation** experiment


Primary Event Generator

- fragmentation
- g-ray decay





(by Pieter Doornenbal)

54Ni @ 150 MeV/u

50Fe

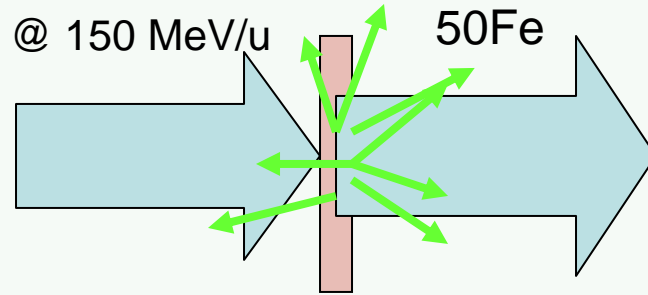

Be Target
(700mg/cm²)

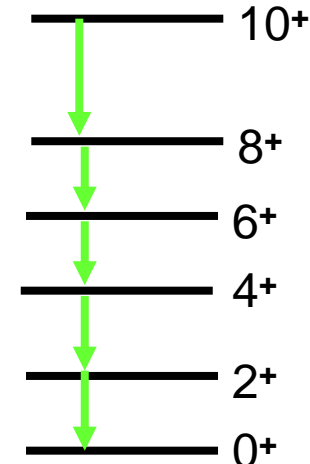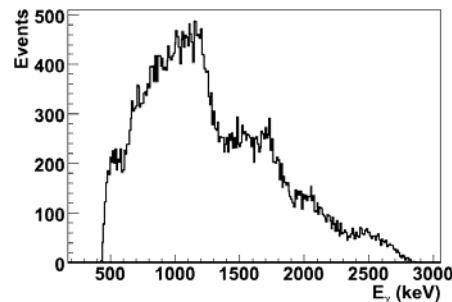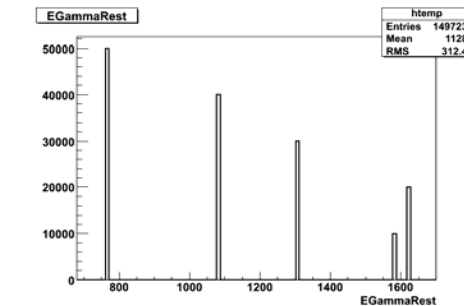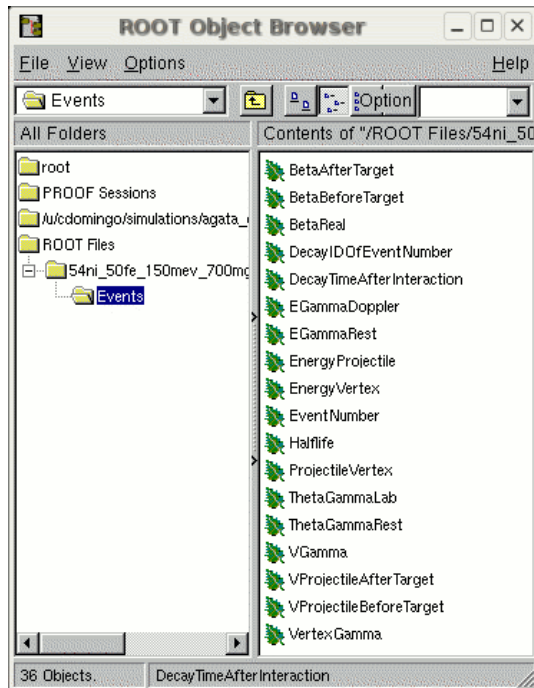



List of Tasks for the Working Group (17.07.2009)

Realistic MC Simulation of a **fragmentation** experiment

Event Builder

- Detector (AGATA) response (list of hits)

(by Enrico Farnea)

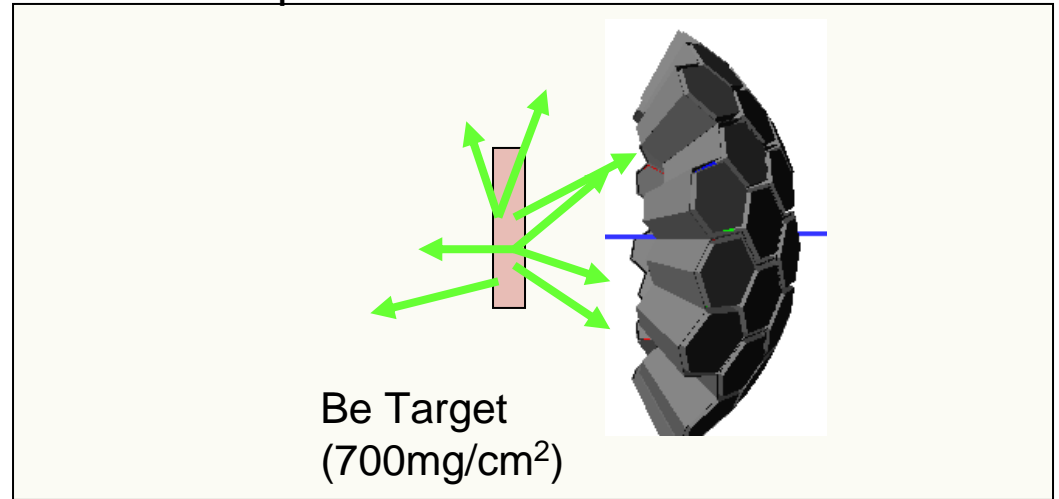




```
GAMMA 1
1000.0000
RECOIL 0.5000 0.0000 0.0000 0.0000 1.0000 0.0000
SOURCE 0 0 0.0000 0.0000 0.0000
$
-1 1401.723 -0.43045 0.48009 0.76434 0
29 73.617 -142.729 141.623 234.825 52 1.053
29 39.475 -143.302 150.765 245.890 52 1.129
29 148.895 -151.199 143.686 236.472 51 1.083
29 155.373 -151.207 143.675 236.479 51 1.083
29 251.516 -129.956 144.860 230.891 41 1.007
29 166.208 -129.833 144.792 230.981 41 1.008
29 163.364 -129.791 144.692 230.949 41 1.008
29 132.162 -129.764 144.711 230.911 41 1.008
29 86.873 -129.765 144.716 230.913 41 1.008
-1 1627.135 0.23197 -0.26644 0.93552 1
1 126.640 125.339 -75.549 240.008 34 1.154
1 334.250 120.598 -82.006 265.573 43 1.065
1 71.117 120.608 -81.984 265.633 43 1.065
1 160.091 120.600 -81.997 265.637 43 1.065
1 11.067 120.642 -81.972 265.678 43 1.065
1 45.200 120.643 -81.971 265.679 43 1.065
-1 1087.822 -0.71426 -0.56881 0.40778 2
-1 1257.962 -0.08354 0.77764 0.62313 3
24 129.869 -24.004 192.131 156.311 05 0.836
24 30.817 -34.318 197.026 157.088 15 0.874
.
.
```


List of Tasks for the Working Group (17.07.2009)

Realistic MC Simulation of a **fragmentation** experiment

Event Reconstruction

- Detectors resolution
- Doppler-correction
- Tracking

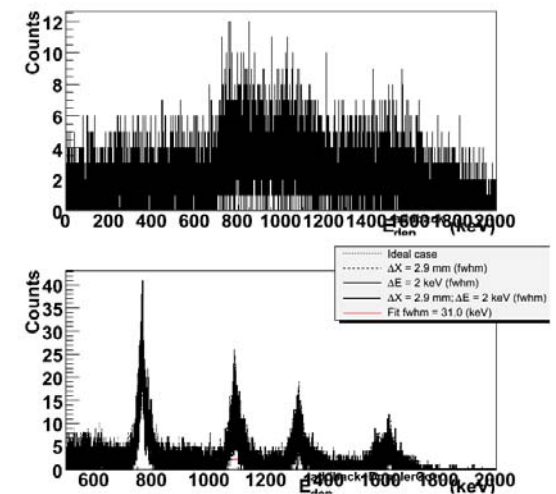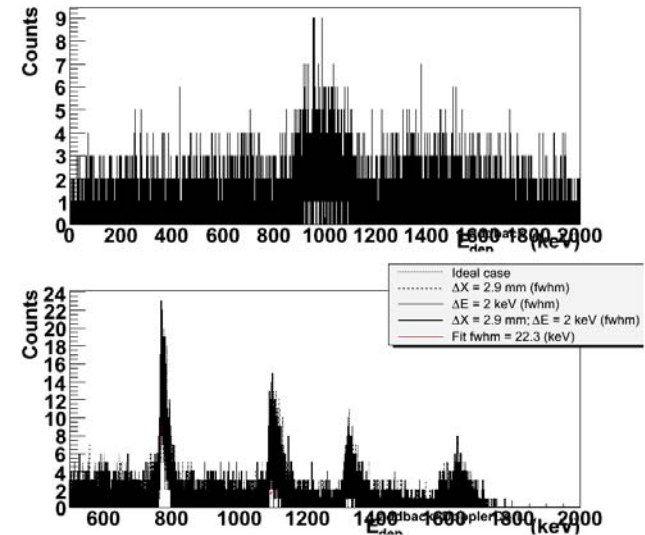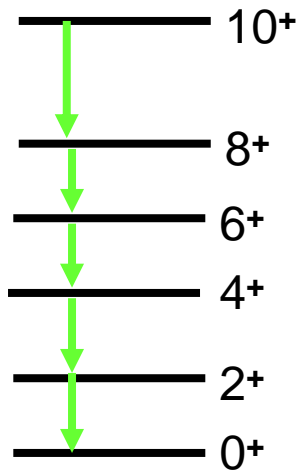


List of Tasks for the Working Group (17.07.2009)

Realistic MC Simulation of a **fragmentation** experiment

Event Reconstruction

- Detectors resolution
- Doppler-correction
- Tracking

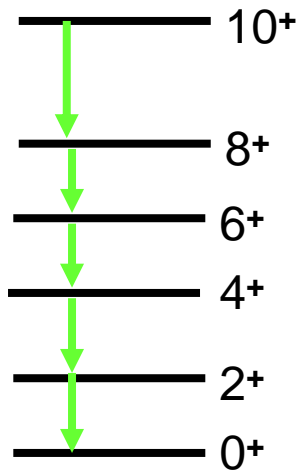

Ersatzfolien


Outline

1. Basics: MC code & event reconstruction
2. Cross check of the results
3. Particular constraints for the setup at GSI
4. Geometries: shell and compact setups
5. Performance comparison
6. Viability of additional γ -ray detectors: RISING, HECTOR, etc
7. Gain in performance from 10 to 12 Clusters
8. Outlook and conclusion

General aspects: MC code

- AGATA Code from Enrico Farnea et al. <http://agata.pd.infn.it/>

GEANT4

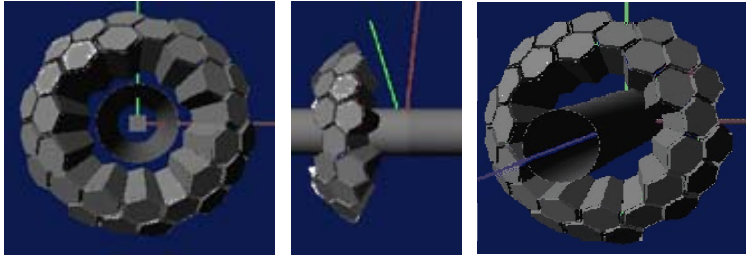

Setup geometry

Primary events,

(e.g. 1 MeV γ -ray @ $\beta = 43\%$)


```
GAMMA 1
1000.0000
RECOIL 0.5000 0.0000 0.0000 0.0000 1.0000 0.0000
SOURCE 0 0 0.0000 0.0000 0.0000
$
-1 1401.723 -0.43045 0.48009 0.76434 0
29 73.617 -142.729 141.623 234.825 52 1.053
29 39.475 -143.302 150.765 245.890 52 1.129
29 148.895 -151.199 143.686 236.472 51 1.083
29 155.373 -151.207 143.675 236.479 51 1.083
29 251.516 -129.956 144.860 230.891 41 1.007
29 166.208 -129.833 144.792 230.981 41 1.008
29 163.364 -129.791 144.692 230.949 41 1.008
29 132.162 -129.764 144.711 230.911 41 1.008
29 86.873 -129.765 144.716 230.913 41 1.008
-1 1627.135 0.23197 -0.26644 0.93552 1
1 126.640 125.339 -75.549 240.008 34 1.154
1 334.250 120.598 -82.006 265.573 43 1.065
1 71.117 120.608 -81.984 265.633 43 1.065
1 160.091 120.600 -81.997 265.637 43 1.065
1 11.067 120.642 -81.972 265.678 43 1.065
1 45.200 120.643 -81.971 265.679 43 1.065
-1 1087.822 -0.71426 -0.56881 0.40778 2
-1 1257.962 -0.08354 0.77764 0.62313 3
24 129.869 -24.004 192.131 156.311 05 0.836
24 30.817 -34.318 197.026 157.088 15 0.874
```

Simulation output:
list mode ascii file

General aspects: MC code

- AGATA Code from Enrico Farnea et al. <http://agata.pd.infn.it/>

GEANT4

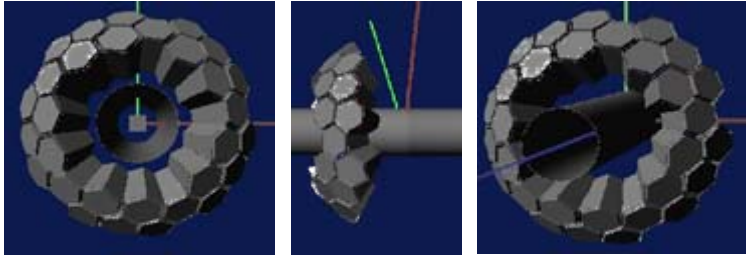

Setup geometry

Primary events,


(e.g. 1 MeV γ -ray @ $\beta = 50\%$)

```
GAMMA 1
1000.0000
RECOIL 0.5000 0.0000 0.0000 0.0000 1.0000 0.0000
SOURCE 0 0 0.0000 0.0000 0.0000
$
-1 1401.723 -0.43045 0.48009 0.76434 0
29 73.617 -142.729 141.623 234.825 52 1.053
29 39.475 -143.302 150.765 245.890 52 1.129
29 148.895 -151.199 143.686 236.472 51 1.083
29 155.373 -151.207 143.675 236.479 51 1.083
29 251.516 -129.956 144.860 230.891 41 1.007
29 166.208 -129.833 144.792 230.981 41 1.008
29 163.364 -129.791 144.692 230.949 41 1.008
29 132.162 -129.764 144.711 230.911 41 1.008
29 86.873 -129.765 144.716 230.913 41 1.008
-1 1627.135 0.23197 -0.26644 0.93552 1
1 126.640 125.339 -75.549 240.008 34 1.154
1 334.250 120.598 -82.006 265.573 43 1.065
1 71.117 120.608 -81.984 265.633 43 1.065
1 160.091 120.600 -81.997 265.637 43 1.065
1 11.067 120.642 -81.972 265.678 43 1.065
1 45.200 120.643 -81.971 265.679 43 1.065
-1 1087.822 -0.71426 -0.56881 0.40778 2
-1 1257.962 -0.08354 0.77764 0.62313 3
24 129.869 -24.004 192.131 156.311 05 0.836
24 30.817 -34.318 197.026 157.088 15 0.874
```

Crystal# Edep X Y Z Segment# (time)

Simulation output:
list mode ascii file

General aspects: event reconstruction

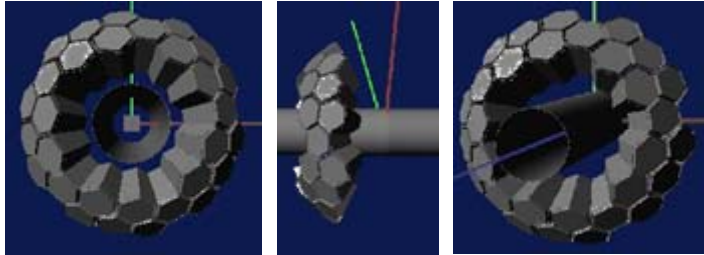


Setup geometry
Primary events,
(e.g. 1 MeV g-ray @ b = 50%)

```
GAMMA 1
1000.0000
RECOIL 0.5000 0.0000 0.0000 0.0000 1.0000 0.0000
SOURCE 0 0 0.0000 0.0000 0.0000
$
-1 1401.723 -0.43045 0.48009 0.76434 0
29 73.617 142.729 141.623 234.825 52 1.053
29 39.475 143.302 150.765 245.890 52 1.129
29 148.895 -151.199 143.686 236.472 51 1.083
29 155.373 -151.207 143.675 236.479 51 1.083
29 251.516 -129.956 144.860 230.891 41 1.007
29 166.208 -129.833 144.792 230.981 41 1.008
29 163.364 -129.791 144.692 230.949 41 1.008
29 132.162 -129.764 144.711 230.911 41 1.008
29 86.873 -129.765 144.716 230.913 41 1.008
-1 1627.135 0.23197 -0.26644 0.93552 1
1 126.640 125.339 -75.549 240.008 34 1.154
1 334.250 120.598 -82.006 265.573 43 1.065
1 71.117 120.608 -81.984 265.633 43 1.065
1 160.091 120.600 -81.997 265.637 43 1.065
1 11.067 120.642 -81.972 265.678 43 1.065
1 45.200 120.643 -81.971 265.679 43 1.065
-1 1087.822 -0.71426 -0.56881 0.40778 2
-1 1257.962 -0.08354 0.77764 0.62313 3
24 129.869 -24.004 192.131 156.311 05 0.836
24 30.817 -34.318 197.026 157.088 15 0.874
```

- Total **deposited energy** at each event:
 - Loop over all hits/event (perfect tracking)
 - mgt code
- Doppler correction:
 - Angle subtended by largest Edep hit

$$E_{\gamma_0} = E_{\gamma} \frac{1 - \beta \cos \mathcal{Q}_{\gamma}}{\sqrt{1 - \beta^2}}$$

General aspects: event reconstruction

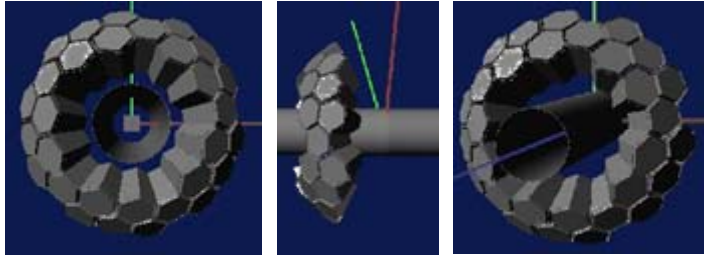


Setup geometry
Primary events,
(e.g. 1 MeV g-ray @ b = 50%)

```
GAMMA 1
1000.0000
RECOIL 0.5000 0.0000 0.0000 0.0000 1.0000 0.0000
SOURCE 0 0 0.0000 0.0000 0.0000
$
-1 1401.723 -0.43045 0.48009 0.76434 0
29 73.617 -142.729 141.623 234.825 52 1.053
29 39.475 -143.302 150.765 245.890 52 1.129
29 148.995 -151.199 143.636 236.472 51 1.083
29 155.373 -151.207 143.675 236.479 51 1.083
29 251.516 -129.956 144.860 230.891 41 1.007
29 166.208 -129.833 144.792 230.981 41 1.008
29 163.364 -129.791 144.692 230.949 41 1.008
29 132.162 -129.764 144.711 230.911 41 1.008
29 86.873 -129.765 144.716 230.913 41 1.008
-1 1627.135 0.23197 -0.26644 0.93552 1
1 126.640 125.339 -75.549 240.008 34 1.154
1 334.250 120.598 -82.006 265.573 43 1.065
1 71.117 120.608 -81.984 265.633 43 1.065
1 160.091 120.600 -81.997 265.637 43 1.065
1 11.067 120.642 -81.972 265.678 43 1.065
1 45.200 120.643 -81.971 265.679 43 1.065
-1 1087.822 -0.71426 -0.56881 0.40778 2
-1 1257.962 -0.08354 0.77764 0.62313 3
24 129.869 -24.004 192.131 156.311 05 0.836
24 30.817 -34.318 197.026 157.088 15 0.874
```

- Total deposited energy at each event:
 - Loop over all hits/event (perfect tracking)
 - mgt code
- Doppler correction:
 - Angle subtended by largest Edep hit

$$E_{\gamma_0} = E_{\gamma} \frac{1 - \beta \cos \mathcal{Q}_{\gamma}}{\sqrt{1 - \beta^2}}$$

General aspects: event reconstruction


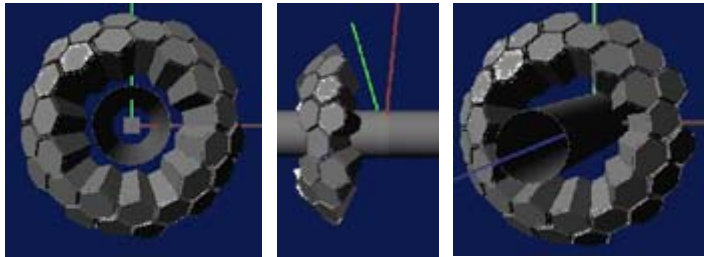


Setup geometry
Primary events,
(e.g. 1 MeV g-ray @ $b = 50\%$)


```
GAMMA 1
1000.0000
RECOIL 0.5000 0.0000 0.0000 0.0000 1.0000 0.0000
SOURCE 0 0 0.0000 0.0000 0.0000
$
-1 1401.723 -0.43045 0.48009 0.76434 0
29 73.617 -142.729 141.623 234.825 52 1.053
29 39.475 -143.302 150.765 245.890 52 1.129
29 148.895 -151.199 143.686 236.472 51 1.083
29 155.373 -151.207 143.675 236.479 51 1.083
29 251.516 -129.956 144.860 230.891 41 1.007
29 166.208 -129.833 144.792 230.981 41 1.008
29 163.364 -129.791 144.692 230.949 41 1.008
29 132.162 -129.764 144.711 230.911 41 1.008
29 86.873 -129.765 144.716 230.913 41 1.008
-1 1627.135 0.23197 -0.26644 0.93552 1
1 126.640 125.339 -75.549 240.008 34 1.154
1 334.250 120.598 -82.006 265.573 43 1.065
1 71.117 120.608 -81.984 265.633 43 1.065
1 160.091 120.600 -81.997 265.637 43 1.065
1 11.067 120.642 -81.972 265.678 43 1.065
1 45.200 120.643 -81.971 265.679 43 1.065
-1 1087.822 -0.71426 -0.56881 0.40778 2
-1 1257.962 -0.08354 0.77764 0.62313 3
24 129.869 -24.004 192.131 156.311 05 0.836
24 30.817 -34.318 197.026 157.088 15 0.874
```

Detector response function (by hand):

Intrinsic energy resolution: deposited energy folded with a Gauss distribution to introduce energy resolution (2 keV @ $E_\gamma = 1$ MeV)

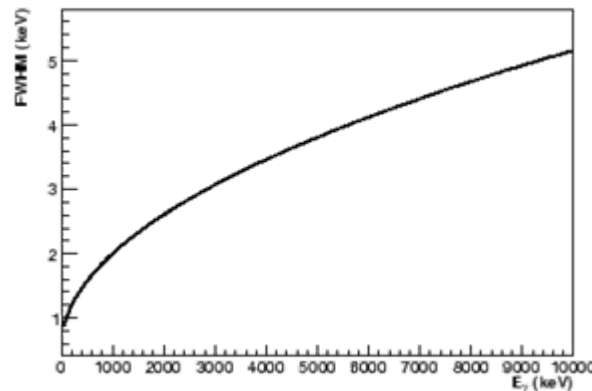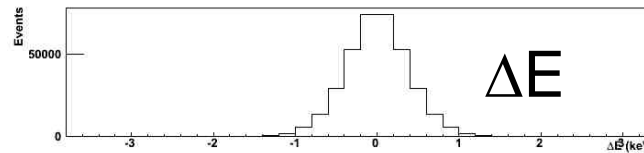

General aspects: event reconstruction



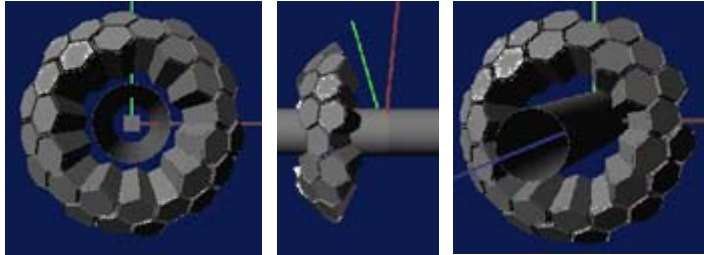


Setup geometry
Primary events,
(e.g. 1 MeV g-ray @ $b = 50\%$)


```
GAMMA 1
1000.0000
RECOIL 0.5000 0.0000 0.0000 0.0000 1.0000 0.0000
SOURCE 0 0 0.0000 0.0000 0.0000
$
-1 1401.723 -0.43045 0.48009 0.76434 0
29 73.617 -142.729 141.623 234.825 52 1.053
29 39.475 -143.302 150.765 245.890 52 1.129
29 148.895 -151.199 143.686 236.472 51 1.083
29 155.373 -151.207 143.675 236.479 51 1.083
29 251.516 -129.956 144.860 230.891 41 1.007
29 166.208 -129.833 144.792 230.981 41 1.008
29 163.364 -129.791 144.692 230.949 41 1.008
29 132.162 -129.764 144.711 230.911 41 1.008
29 86.873 -129.765 144.716 230.913 41 1.008
-1 1627.135 0.23197 -0.26644 0.93552 1
1 126.640 125.339 -75.549 240.008 34 1.154
1 334.250 120.598 -82.006 265.573 43 1.065
1 71.117 120.608 -81.984 265.633 43 1.065
1 160.091 120.600 -81.997 265.637 43 1.065
1 11.067 120.642 -81.972 265.678 43 1.065
1 45.200 120.643 -81.971 265.679 43 1.065
-1 1087.822 -0.71426 -0.56881 0.40778 2
-1 1257.962 -0.08354 0.77764 0.62313 3
24 129.869 -24.004 192.131 156.311 05 0.836
24 30.817 -34.318 197.026 157.088 15 0.874
```

Detector response function (by hand):




Intrinsic spatial resolution: x, y, z folded with a Gauss distribution to introduce spatial resolution of 2-5 mm FWHM

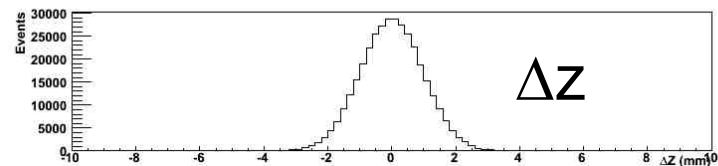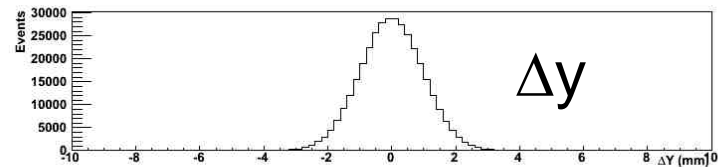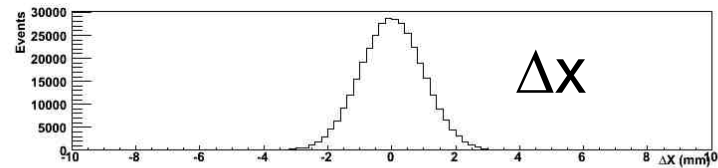

General aspects: event reconstruction (example)

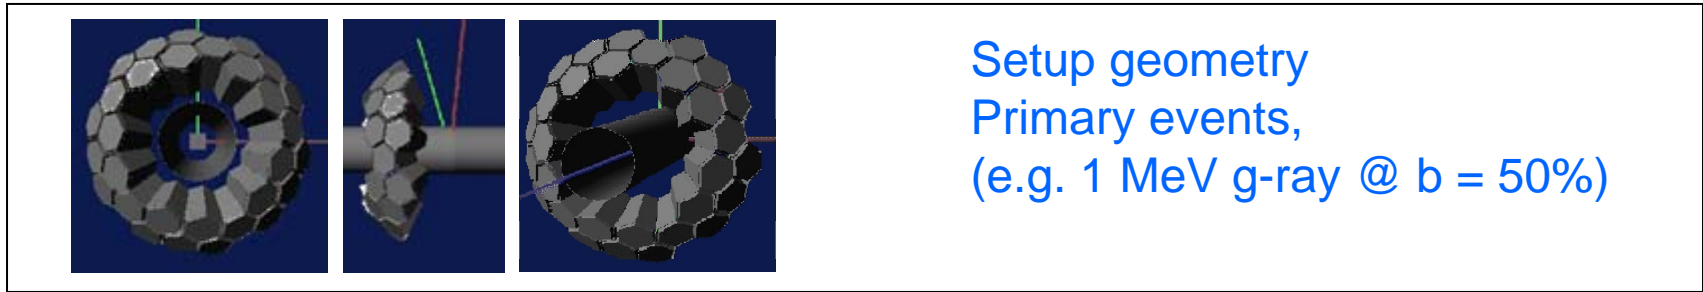

d = 23.5 cm

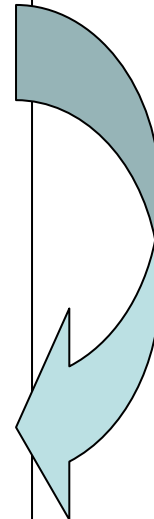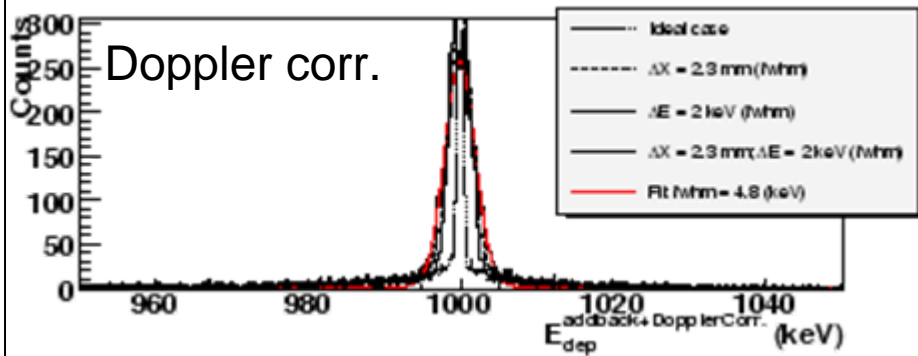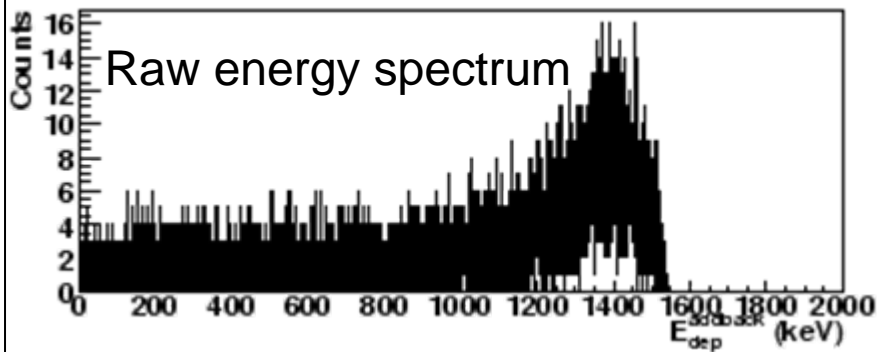


$$E_{\gamma 0} = E_{\gamma} \frac{1 - \beta \cos \vartheta_{\gamma}}{\sqrt{1 - \beta^2}}$$

$\Delta E = 2 \text{ keV (fwhm) @ } E_{\gamma} = 1 \text{ MeV; } \Delta x = 4 \text{ mm}$

Outline

1. Basics: MC code & event reconstruction
2. Cross check of the results
3. Particular constraints for the setup at GSI
4. Geometries: shell and compact setups
5. Performance comparison
6. Viability of additional γ -ray detectors: RISING, HECTOR, etc
7. Gain in performance from 10 to 12 Clusters
8. Outlook and conclusion

Validation analysis / event reconstruction

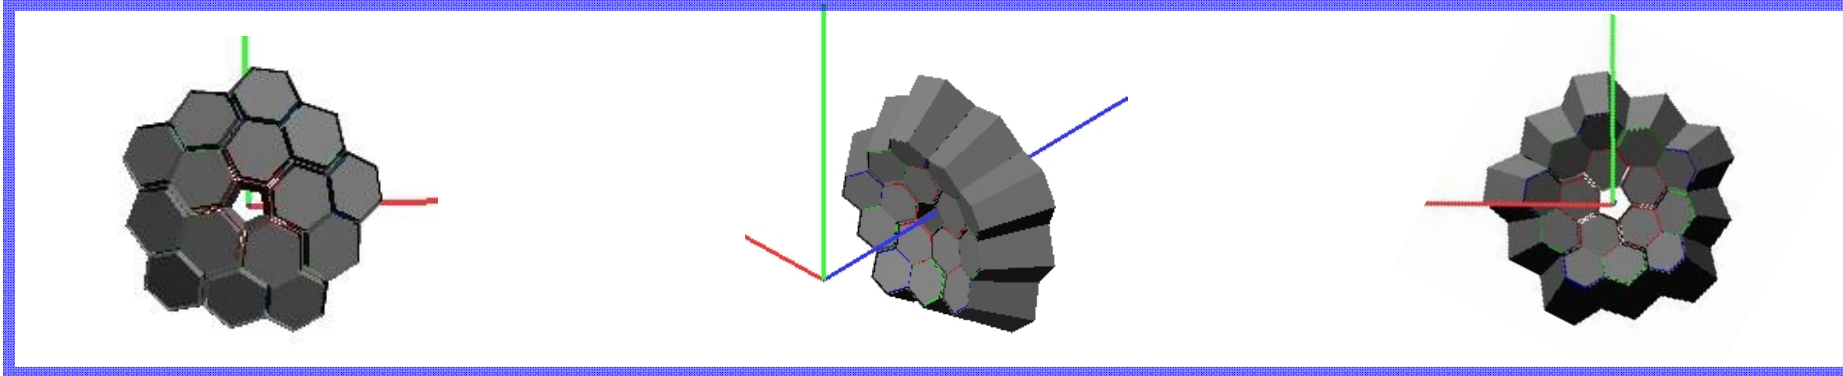

<http://agata.pd.infn.it/documents/simulations/demonstrator.html>






AGATA: Performance of the Demonstrator Array

For more information on the simulation code and to obtain the actual code contact [Enrico Farnea](#)




Last updated: November 8th 2005

The AGATA Demonstrator

The AGATA Demonstrator Array is an arrangement of five triple clusters of the same kind which will be used to form the final [A180 Configuration](#) of AGATA. The performance of such an object will depend in a critical way on its placement relative to the target position. In particular, given the lack of a spherical symmetry, it is sensible to place the detectors closer to the target position compared to the "reference" distance being the target-detector distance of the full A180 Configuration, that is, 23.5 cm. The photopeak efficiency and the P/T ratio as a function of the shift from the geometrical centre are shown in the following plots, where it is assumed that 1 MeV photons are emitted from a point source at rest in the Laboratory reference frame.

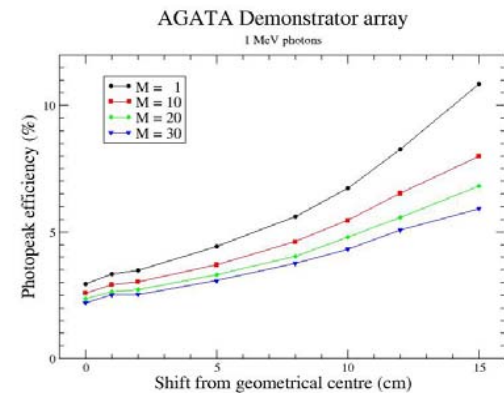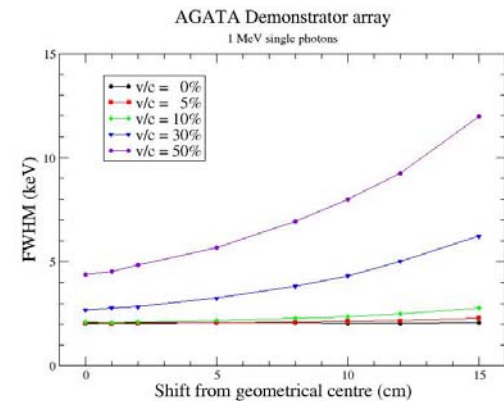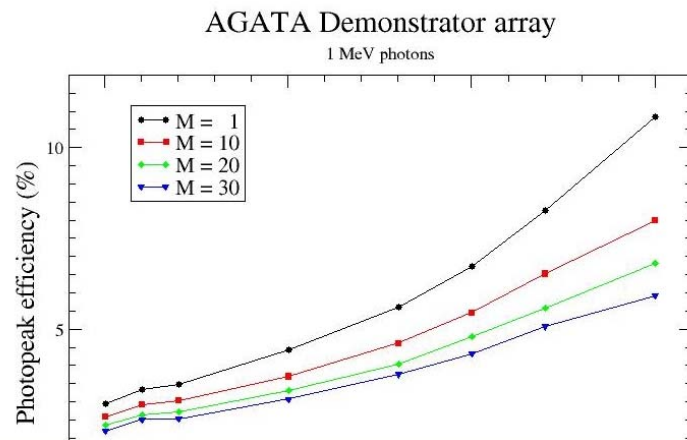

Validation analysis / event reconstruction

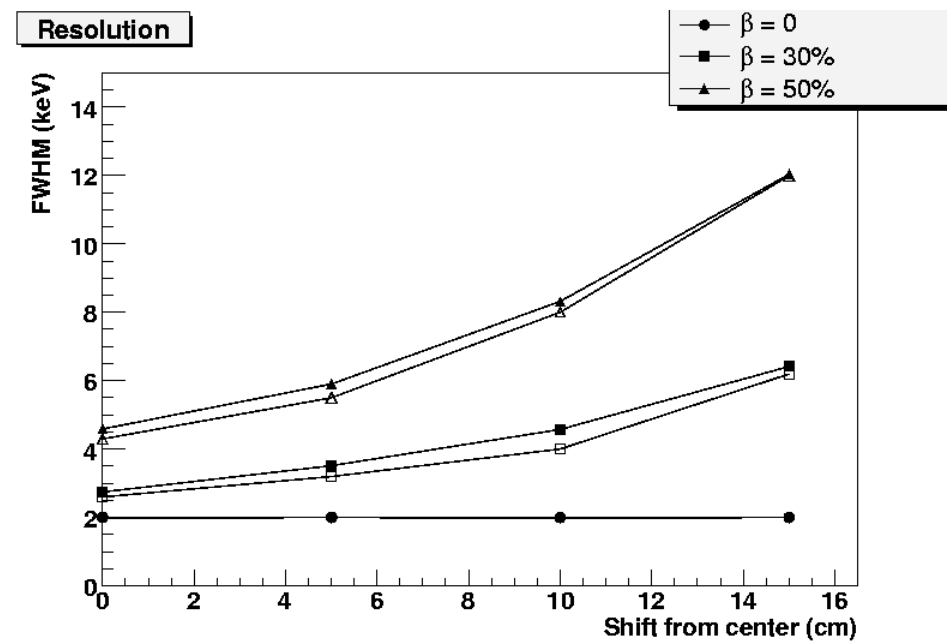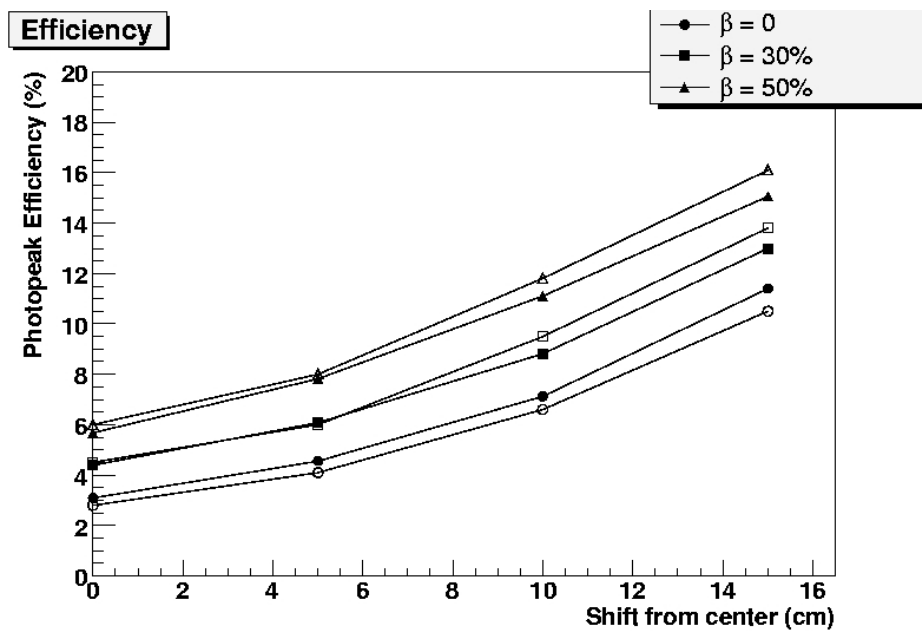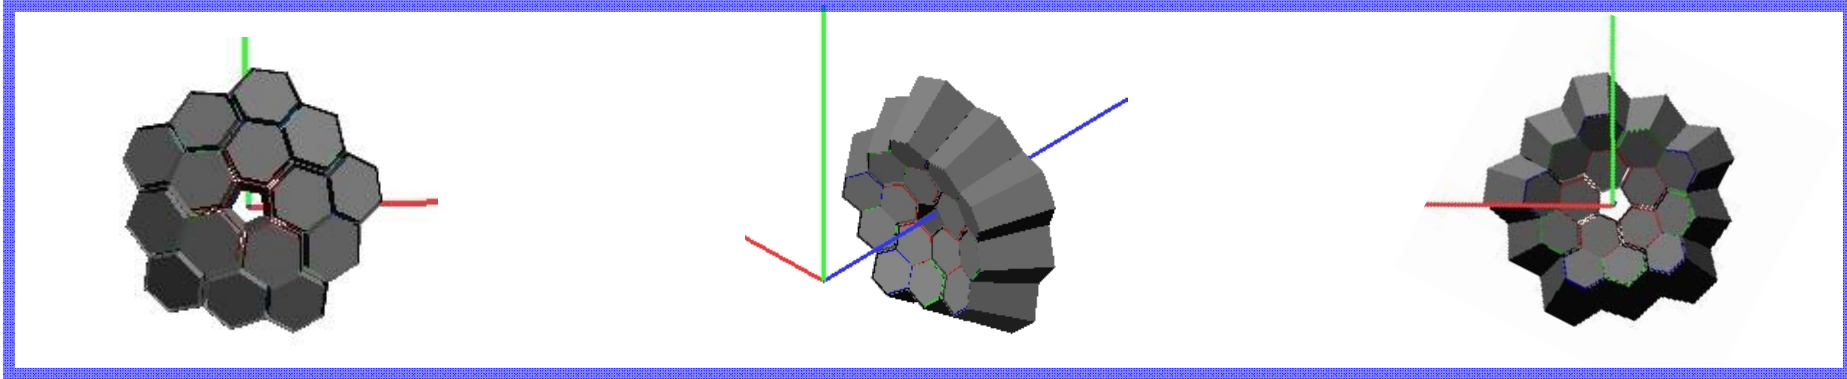




Empty symbols: analysis LNL

Solid symbols: analysis GSI

Other aspects

- Background



- | | | |
|--------------------------------------|--|------------------------------|
| • Atomic background (bremsstrahlung) |  | Shielding + P. Detistov work |
| • Neutron induced background |  | Nothing |
| • Scatt. Particle background |  | Tests October '09 |

- Mechanical constraints (holding structure)



- Technical constraints (square beam pipe, cylindrical pipe smallest size compatibel with DSSSD Sec. Target, No Chamber ?)

AGATA Geometry @ GSI θ -Diff. Photopeak Efficiency



C1

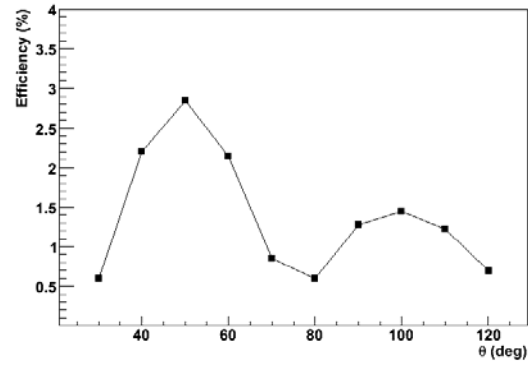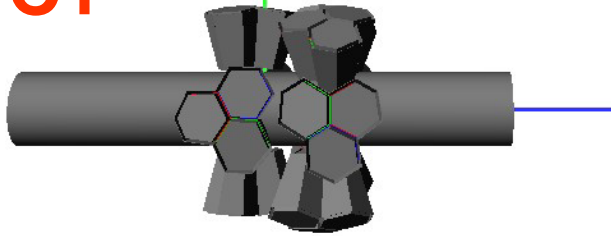

C2

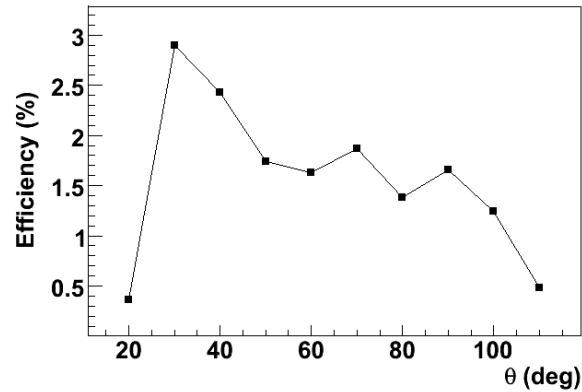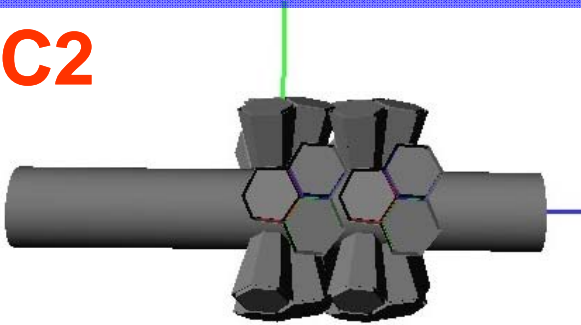


C3

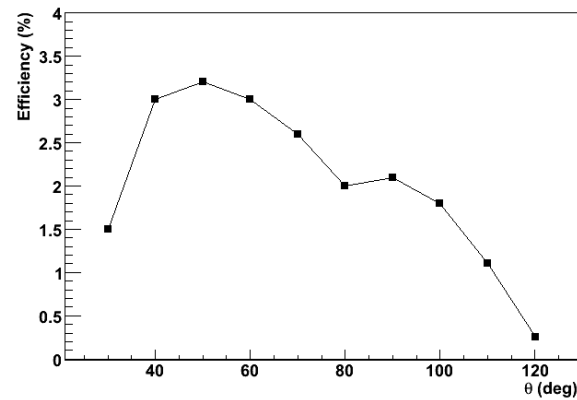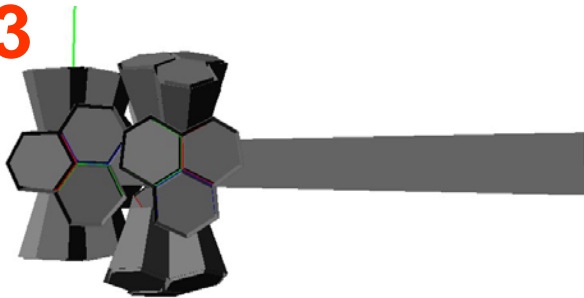


AGATA Geometry @ GSI θ -Diff. Energy Resolution





C1

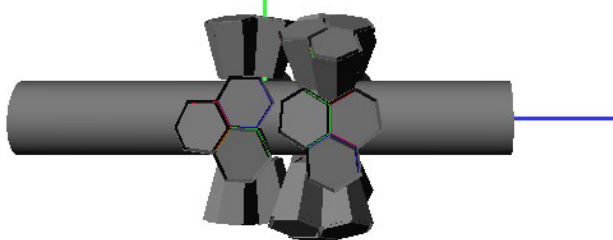

C2

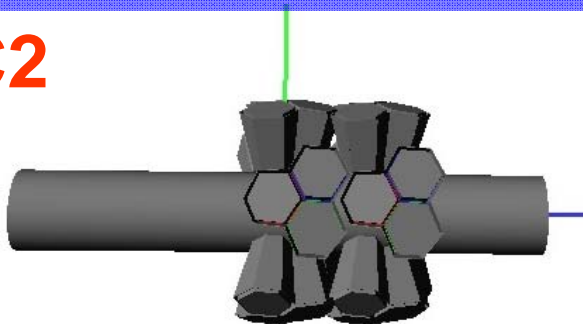


C3

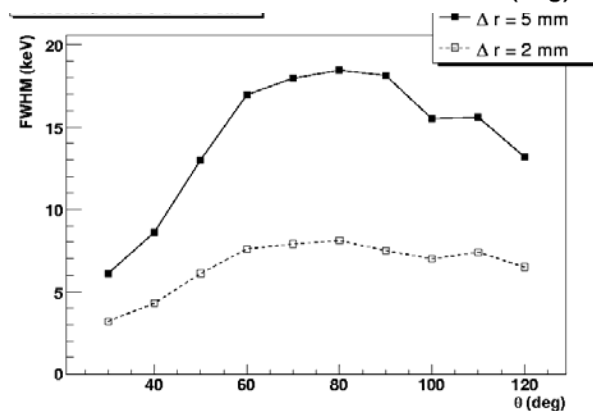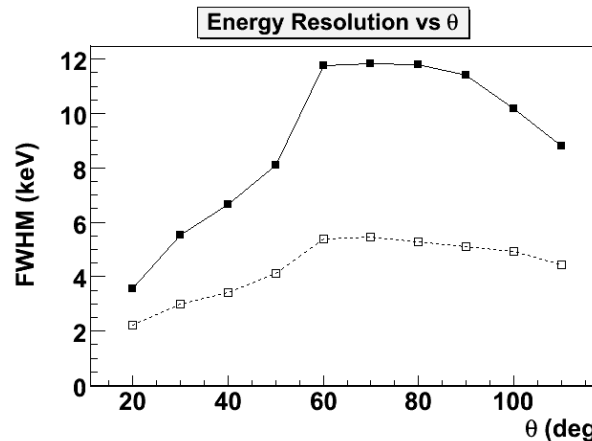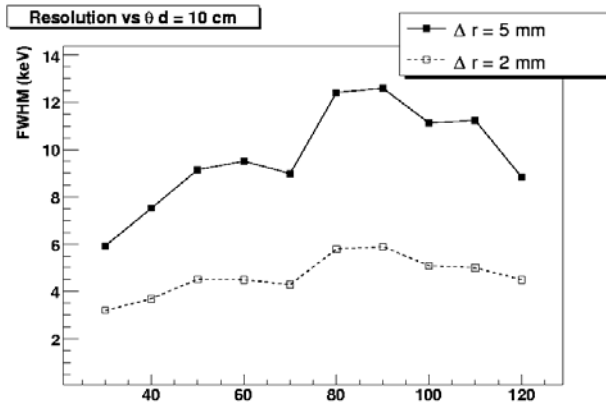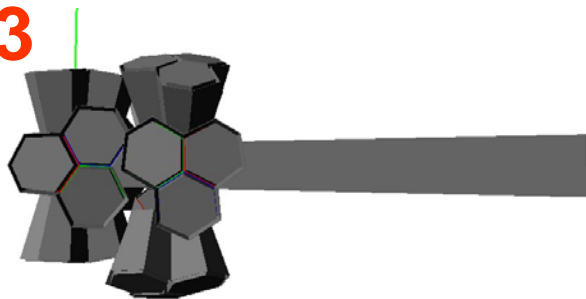


S- and C-Geometries, Optimal Distances

S1




$$d = 23.5 - 15 = 8.5 \text{ cm}$$

S2




$$d = 23.5 - 10 = 13.5 \text{ cm}$$

S3




$$d = 23.5 - 15 = 8.5 \text{ cm}$$


C1

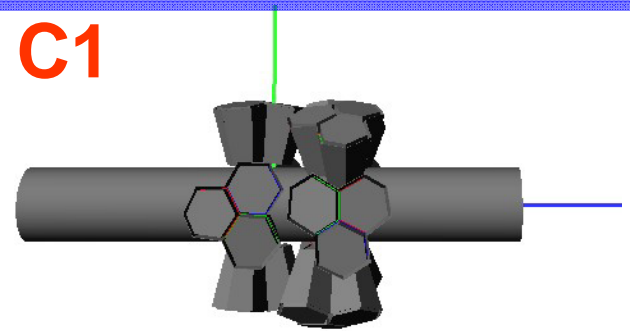

C2


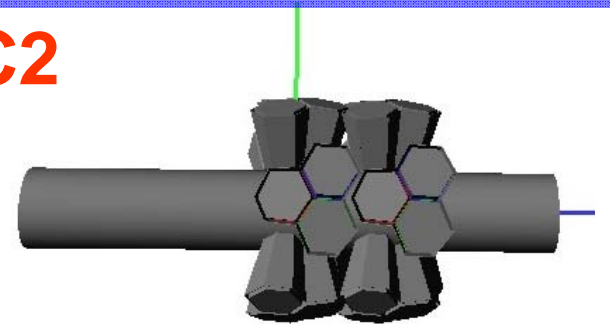


C3

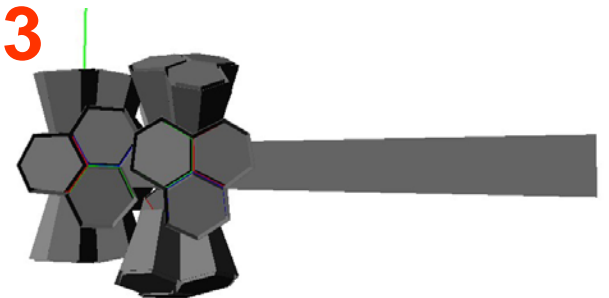

Stepwise geometry optimisation

- Ideal geometry = first approach, first step

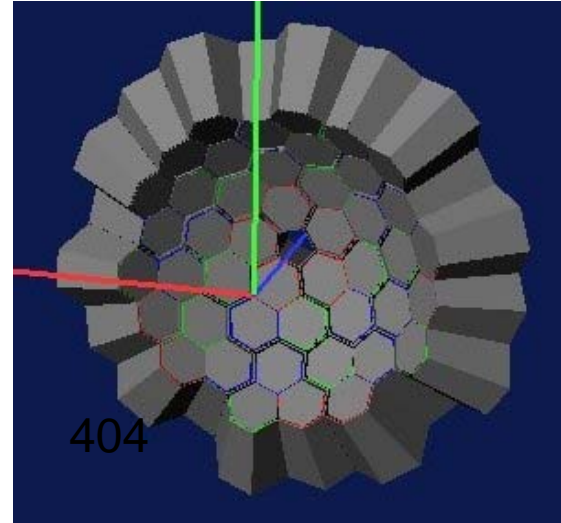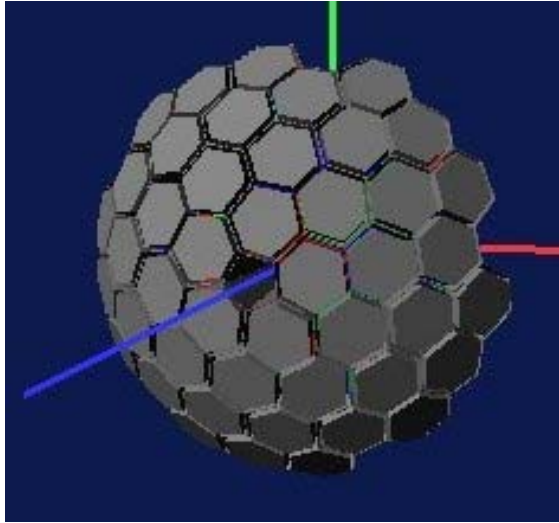


- two main disadvantages:

1. 15 cluster detectors will not be available yet in 2011/2012
2. The beam hole (pentagonal hole) is too narrow for the GSI beam size







- Geometry constraint: triple clusters (not individual crystals)

8 Clusters Asymmetric Ring Geometry

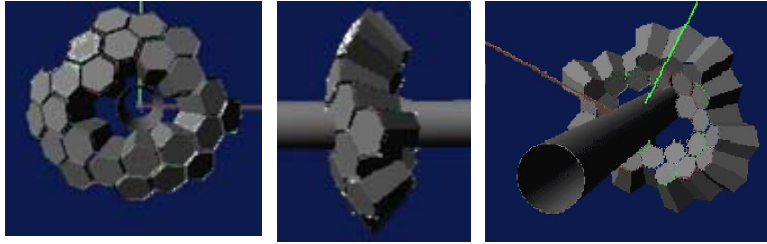


8 Clusters

Hole (11.5 cm) beam-pipe 11 cm

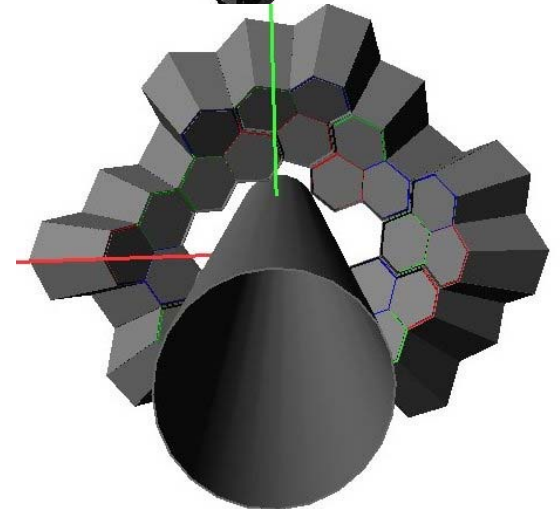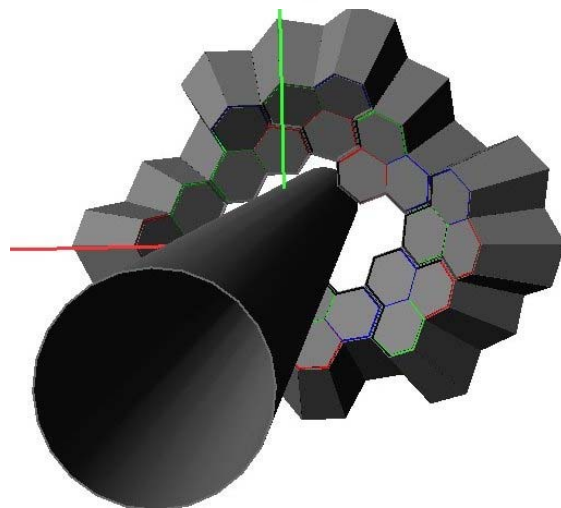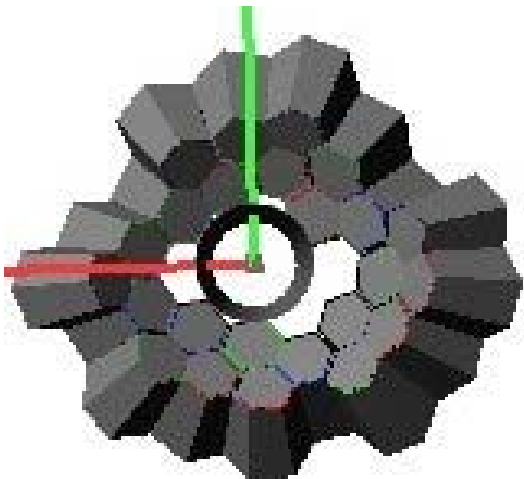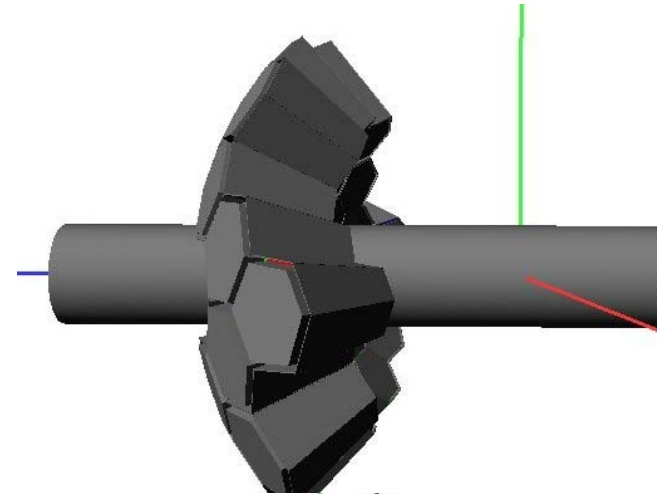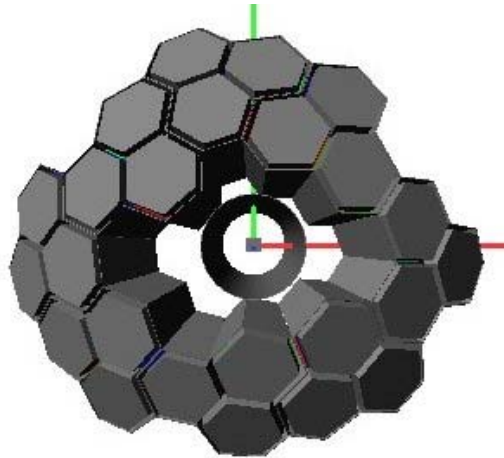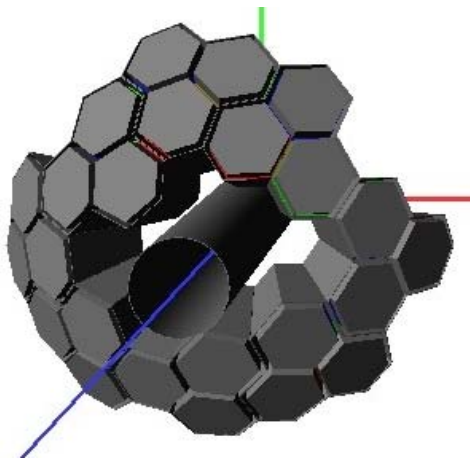

8 Clusters Asymmetric Ring Geometry

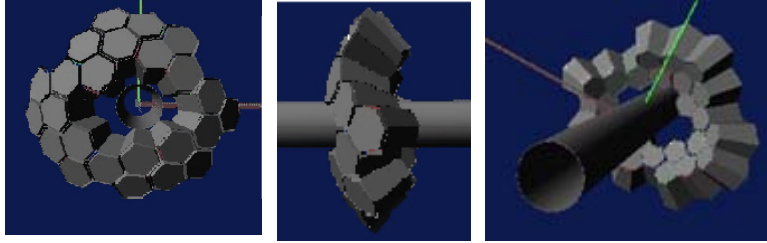

8 Clusters

Hole (11.5 cm) beam-pipe 11 cm


A180euler.list



A180eulerprespecv4.list

```
# The Euler angles (degree) and shifts (mm) of the 60 clusters
# cl cl#  psi(Rz)  theta(Ry)  phi(Rz)  dx      dy      dz
#  0  0  164.302488  21.967863  -5.649422  102.935572  -10.182573  256.432015
.
.
.
# 44  0   42.906217  106.291521  -20.916343  247.916020  -94.750958  -77.567377
# 45  0 -156.210622  134.706892   15.424027  189.440679   52.266136 -194.518058
# 46  0  111.584005  131.663878   52.562301  125.572067  164.017668 -183.811468
# 50  0  111.584005  131.663878 -163.437699 -197.997103  -58.883672 -183.811468
# 51  0 -156.210622  134.706892 -128.575973 -122.539465 -153.634630 -194.518058
# 52  0  111.584005  131.663878  -91.437699   -5.182770 -206.502490 -183.811468
# 53  0 -156.210622  134.706892  -56.575973  108.248439 -164.017668 -194.518058
# 54  0  111.584005  131.663878  -19.437699  194.793975  -68.741886 -183.811468
# 55  0  -15.697512  158.032137   41.649422   77.291461   68.741886 -256.432015
# 56  0  -15.697512  158.032137  113.649422  -41.493043   94.750958 -256.432015
# 57  0  -15.697512  158.032137 -174.350578 -102.935572  -10.182573 -256.432015
# 58  0  -15.697512  158.032137 -102.350578  -22.124639 -101.044134 -256.432015
# 59  0  -15.697512  158.032137  -30.350578   89.261793  -52.266136 -256.432015
```

8 Clusters Asymmetric Ring Geometry

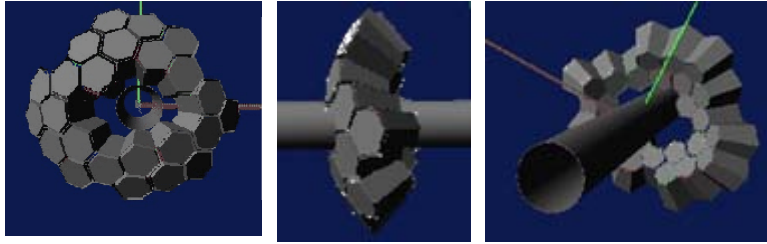

8 Clusters

Hole (11.5 cm) beam-pipe 11 cm


A180euler.list



A180eulerprespecv4.list

```
# The Euler angles (degree) and shifts (mm) of the 60 clusters
# cl cl#  psi(Rz)  theta(Ry)  phi(Rz)  dx      dy      dz
#  0  0  164.302488  21.967863  -5.649422  102.935572  -10.182573  256.432015
.
.
.
# 44  0  42.906217  106.291521  -20.916343  247.916020  -94.750958  -77.567377
# 45  0 -156.210622  134.706892  15.424027  189.440679  52.266136  -194.518058
# 46  0  111.584005  131.663878  52.562301  125.572067  164.017668  -183.811468
# 50  0  111.584005  131.663878  -163.437699  -197.997103  -58.883672  -183.811468
# 51  0 -156.210622  134.706892  -128.575973  -122.539465  -153.634630  -194.518058
# 52  0  111.584005  131.663878  -91.437699  -5.182770  -206.502490  -183.811468
# 53  0 -156.210622  134.706892  -56.575973  108.248439  -164.017668  -194.518058
# 54  0  111.584005  131.663878  -19.437699  194.793975  -68.741886  -183.811468
# 55  0 -15.697512  158.032137  41.649422  77.291461  68.741886  -256.432015
# 56  0 -15.697512  158.032137  113.649422  -41.493043  94.750958  -256.432015
# 57  0 -15.697512  158.032137  -174.350578  -102.935572  -10.182573  -256.432015
# 58  0 -15.697512  158.032137  -102.350578  -22.124639  -101.044134  -256.432015
# 59  0 -15.697512  158.032137  -30.350578  89.261793  -52.266136  -256.432015
```

8 Clusters Asymmetric Ring Geometry

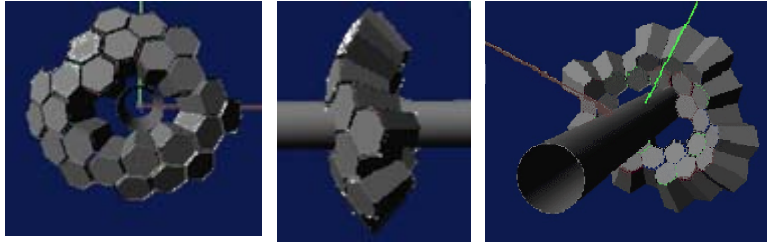

8 Clusters

Hole (11.5 cm) beam-pipe 11 cm

```
/Agata/detector/rotateArray Ry(theta) Rz(phi)
```


```
radd.rotateY( thetaShift );  
radd.rotateZ( phiShift );
```

```
/Agata/detector/rotateArray Ry(theta) Rz(phi) Rx(psi)
```

```
/Agata/detector/rotateArray 175.0 30.0 -17.0
```

```
radd.rotateY( thetaShift );  
radd.rotateZ( phiShift );  
radd.rotateX( psiShift );
```

8 Clusters Asymmetric Ring Geometry

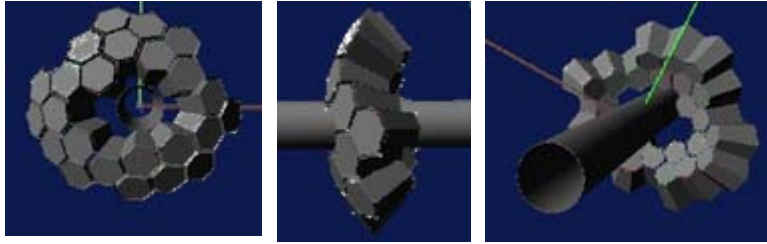

8 Clusters


Hole (11.5 cm) beam-pipe 11 cm

```
/Agata/detector/rotateArray 175.0 30.0 -17.0
```

The Euler angles (degree) and shifts (mm) of the 60 clusters

#	cl	cl#	psi(Rz)	theta(Ry)	phi(Rz)	dx	dy	dz
#	0	0	164.302488	21.967863	-5.649422	102.935572	-10.182573	256.432015
.								
.								
.								
#	44	0	42.906217	106.291521	-20.916343	247.916020	-94.750958	-77.567377
	45	0	-156.210622	134.706892	15.424027	189.440679	52.266136	-194.518058
#	46	0	111.584005	131.663878	52.562301	125.572067	164.017668	-183.811468
#	50	0	111.584005	131.663878	-163.437699	-197.997103	-58.883672	-183.811468
	51	0	-156.210622	134.706892	-128.575973	-122.539465	-153.634630	-194.518058
	52	0	111.584005	131.663878	-91.437699	-5.182770	-206.502490	-183.811468
	53	0	-156.210622	134.706892	-56.575973	108.248439	-164.017668	-194.518058
	54	0	111.584005	131.663878	-19.437699	194.793975	-68.741886	-183.811468
	55	0	-15.697512	158.032137	41.649422	77.291461	68.741886	-256.432015
	56	0	-15.697512	158.032137	113.649422	-41.493043	94.750958	-256.432015
	57	0	-15.697512	158.032137	-174.350578	-102.935572	-10.182573	-256.432015
#	58	0	-15.697512	158.032137	-102.350578	-22.124639	-101.044134	-256.432015
#	59	0	-15.697512	158.032137	-30.350578	89.261793	-52.266136	-256.432015



8 Clusters Asymmetric Ring

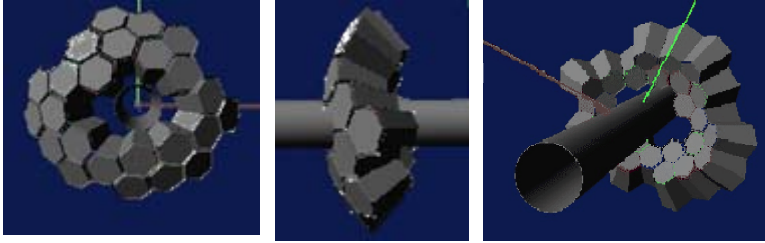

8 Clusters

Hole (11.5 cm) beam-pipe 11 cm


$d = 23.5 \text{ cm}$

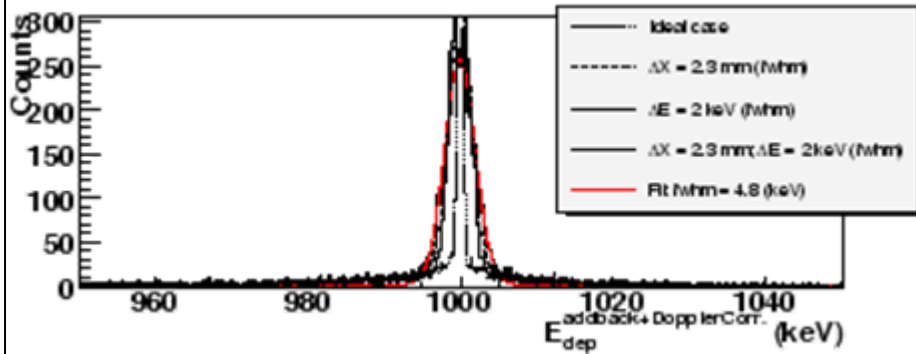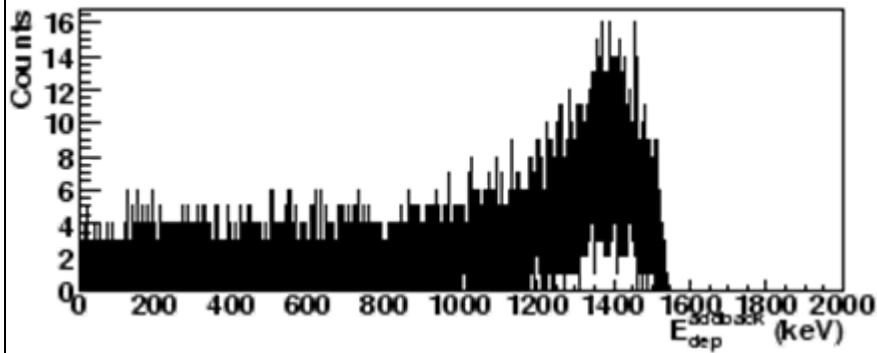

$$E_{\gamma 0} = E_{\gamma} \frac{1 - \beta \cos \vartheta_{\gamma}}{\sqrt{1 - \beta^2}}$$

$\Delta E = 2 \text{ keV (fwhm) @ } E_{\gamma} = 1 \text{ MeV; } \Delta x = 4 \text{ mm}$



8 Clusters Asymmetric Ring

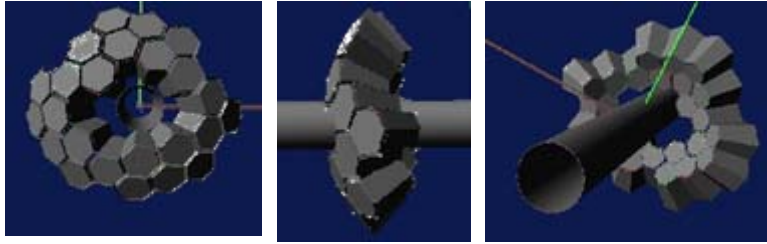



8 Clusters

Hole (11.5 cm) beam-pipe 11 cm

$d = 23.5$ cm

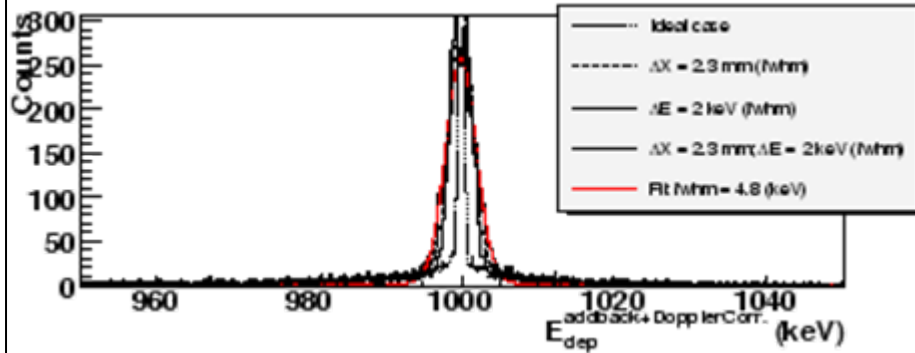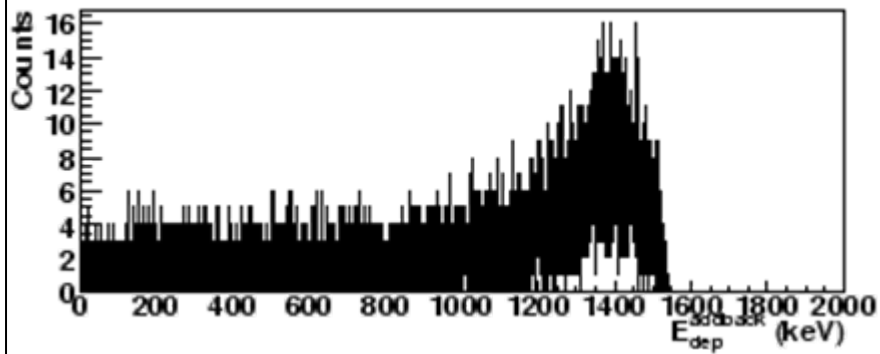


$d = 1.5$ cm

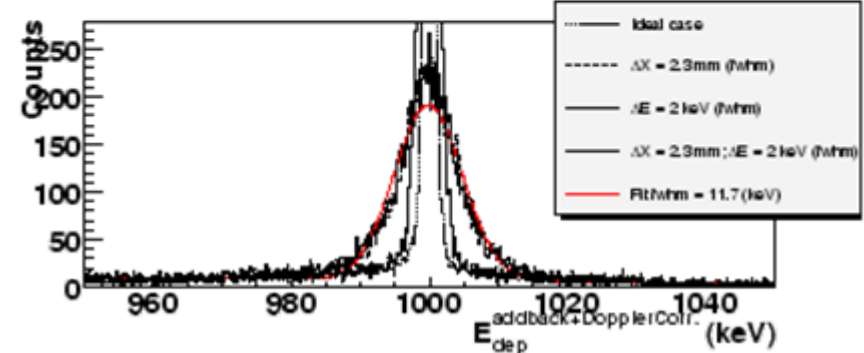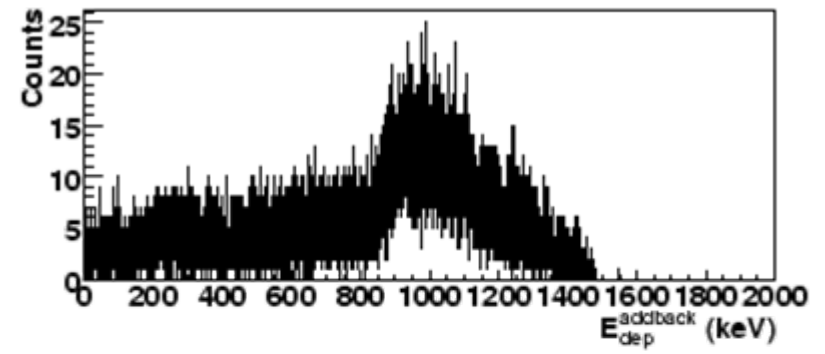

$\Delta E = 2$ keV (fwhm) @ $E_\gamma = 1$ MeV; $\Delta x = 4$ mm


8 Clusters Asymmetric Ring

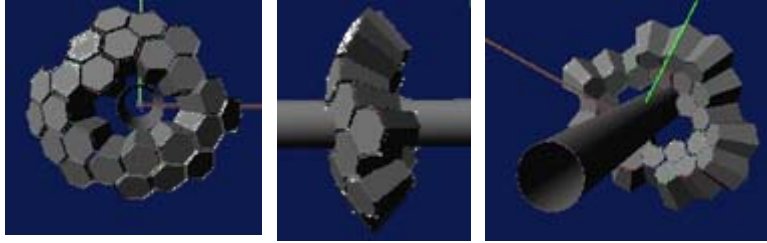

8 Clusters

Hole (11.5 cm) beam-pipe 11 cm


Photopeak Efficiency vs offset from centre, geometry: prespecv4 (Asy.Ring), $\beta = 0.43$, θ from E_{dep}^{max}

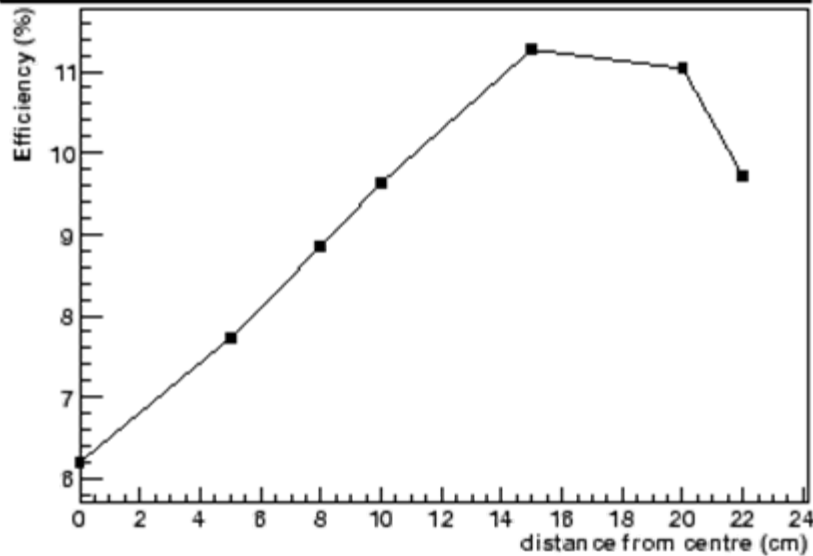

23.5 cm

1.5 cm

FWHM vs offset from centre, geometry: prespecv4 (1 Asy.Ring), $\beta = 0.43$, θ from E_{dep}^{max}

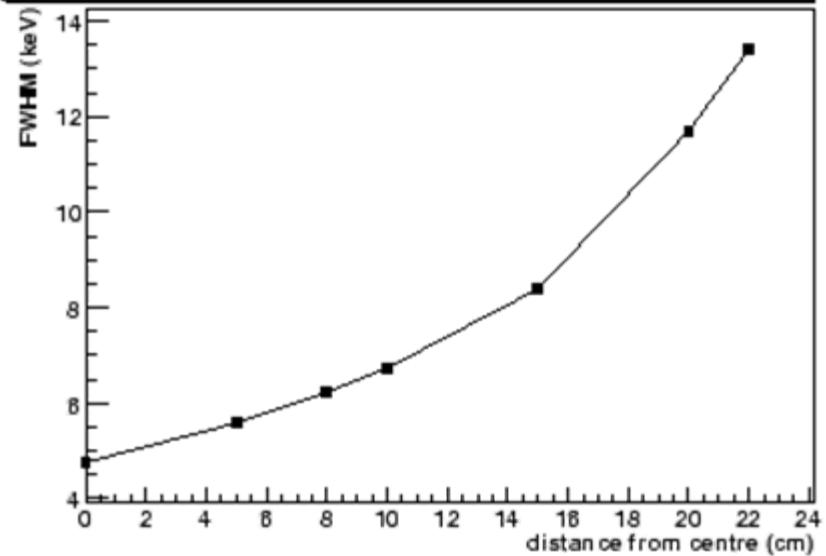


23.5 cm

1.5 cm


$\Delta E = 2$ keV (fwhm) @ $E_{\gamma} = 1$ MeV; $\Delta x = 4$ mm

8 Clusters Asymmetric Ring

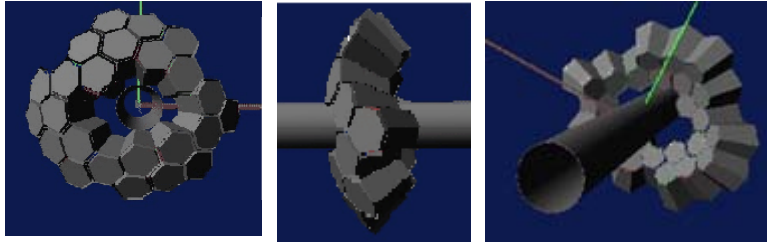


8 Clusters

Hole (11.5 cm) beam-pipe 11 cm

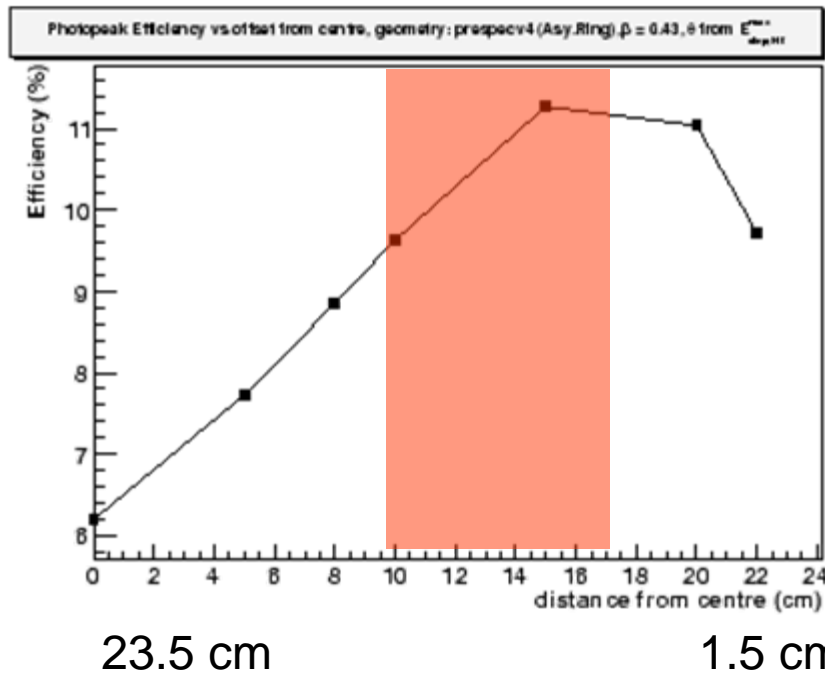


Efficiency = 10-11%

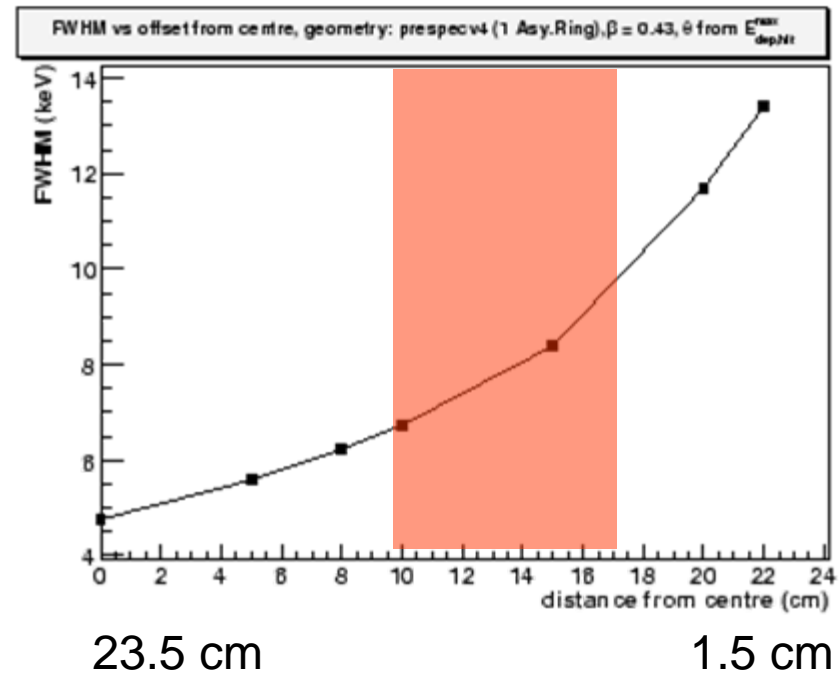

FWHM = 6-8 keV


$\Delta E = 2$ keV (fwhm) @ $E_{\gamma} = 1$ MeV; $\Delta x = 4$ mm

8 Clusters Asymmetric Ring

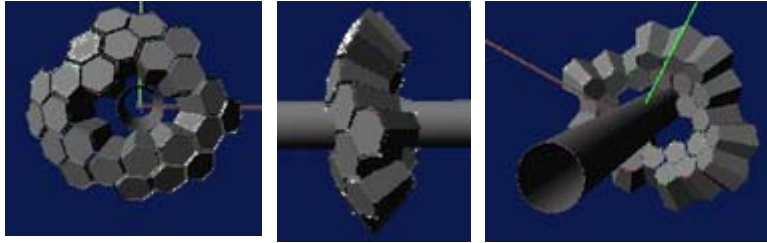


8 Clusters

Hole (11.5 cm) beam-pipe 11 cm

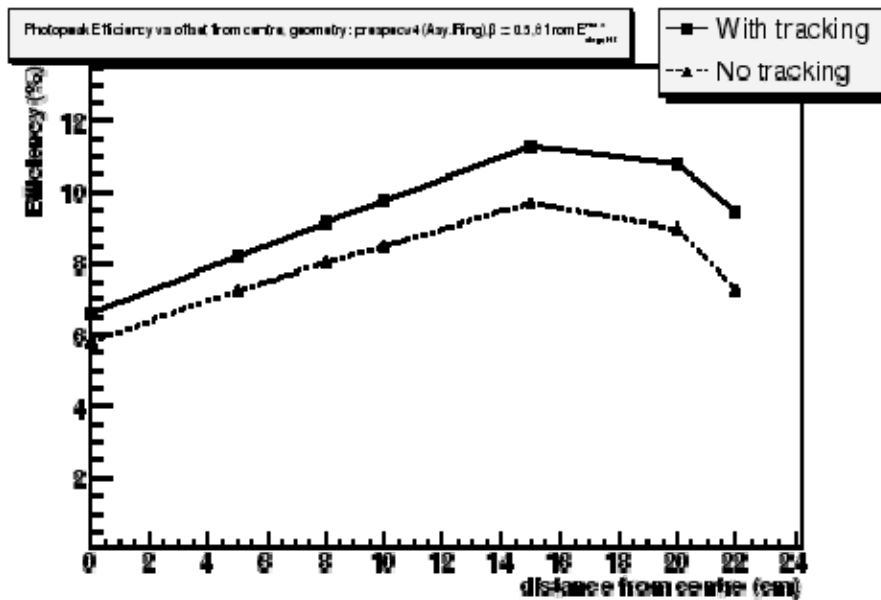

23.5 cm

1.5 cm

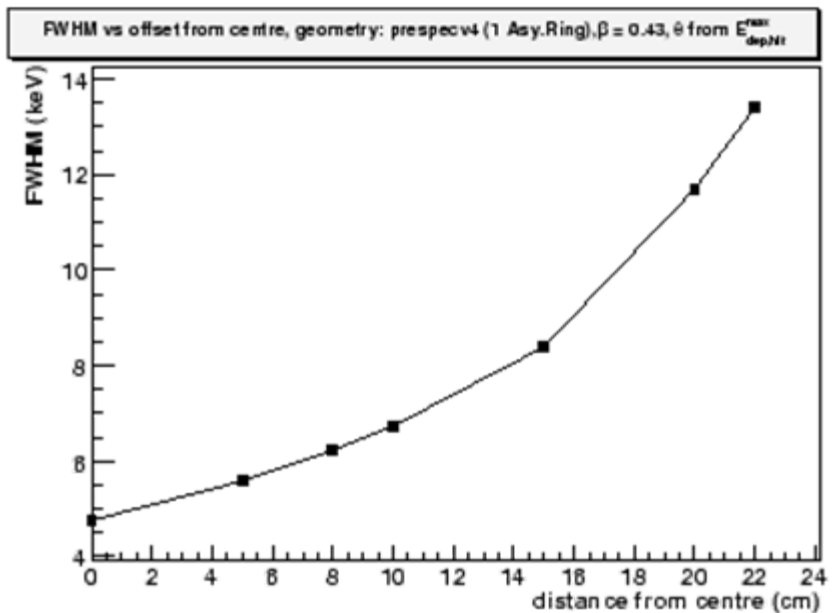



23.5 cm

1.5 cm

$$\Delta E = 2 \text{ keV (fwhm)} @ E_{\gamma} = 1 \text{ MeV}; \quad \Delta x = 4 \text{ mm}$$





Solid angle occupied and free

C1

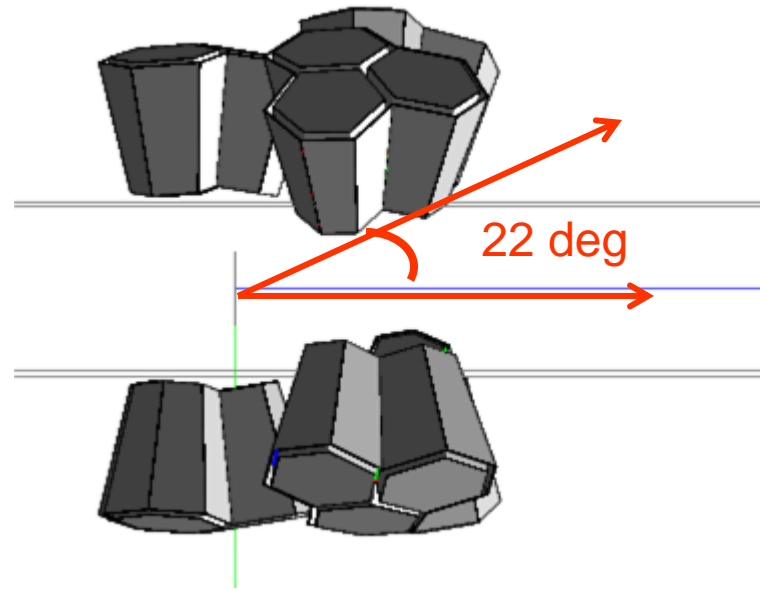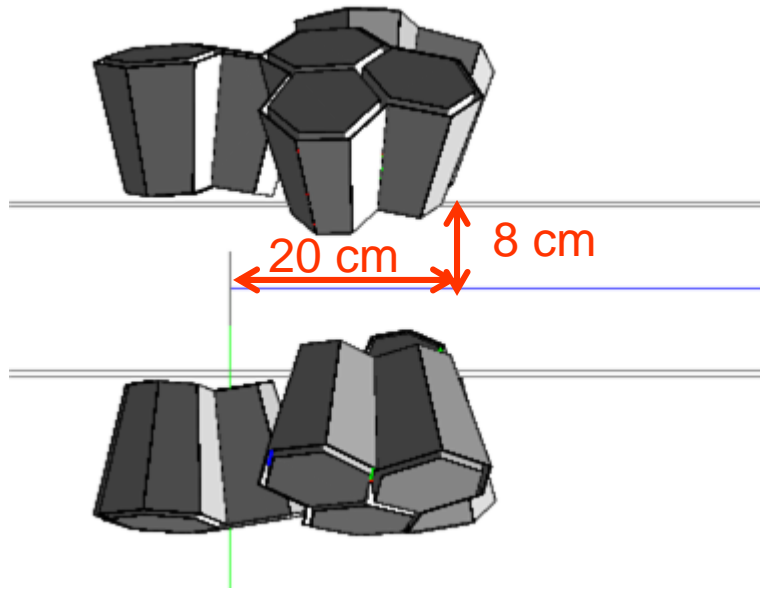


Solid angle occupied and free


C3

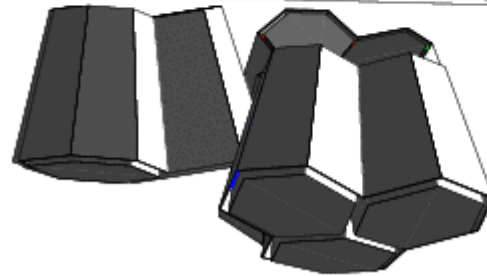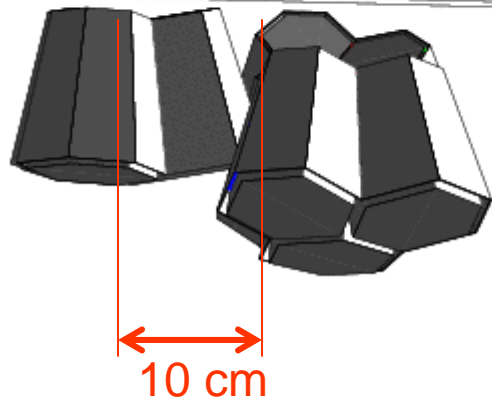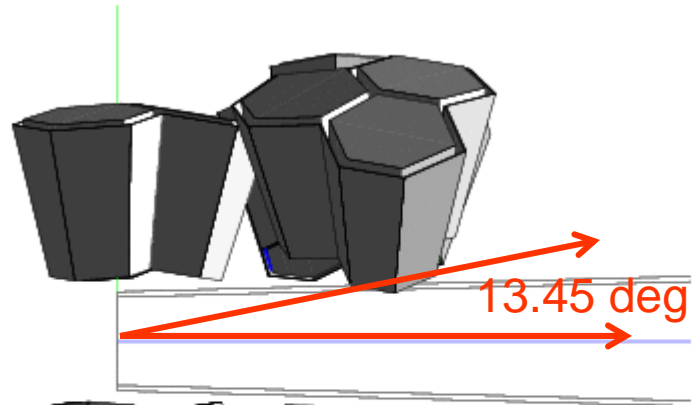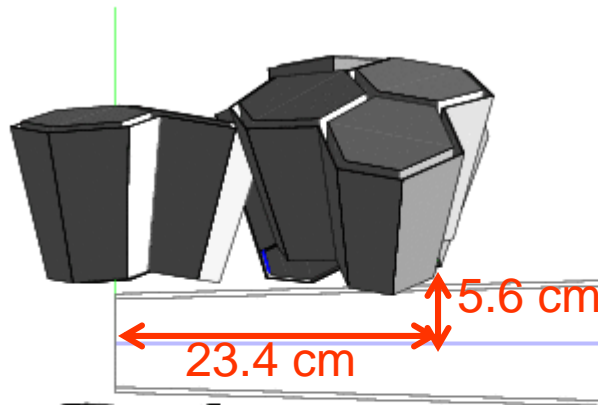


Other viewer's views

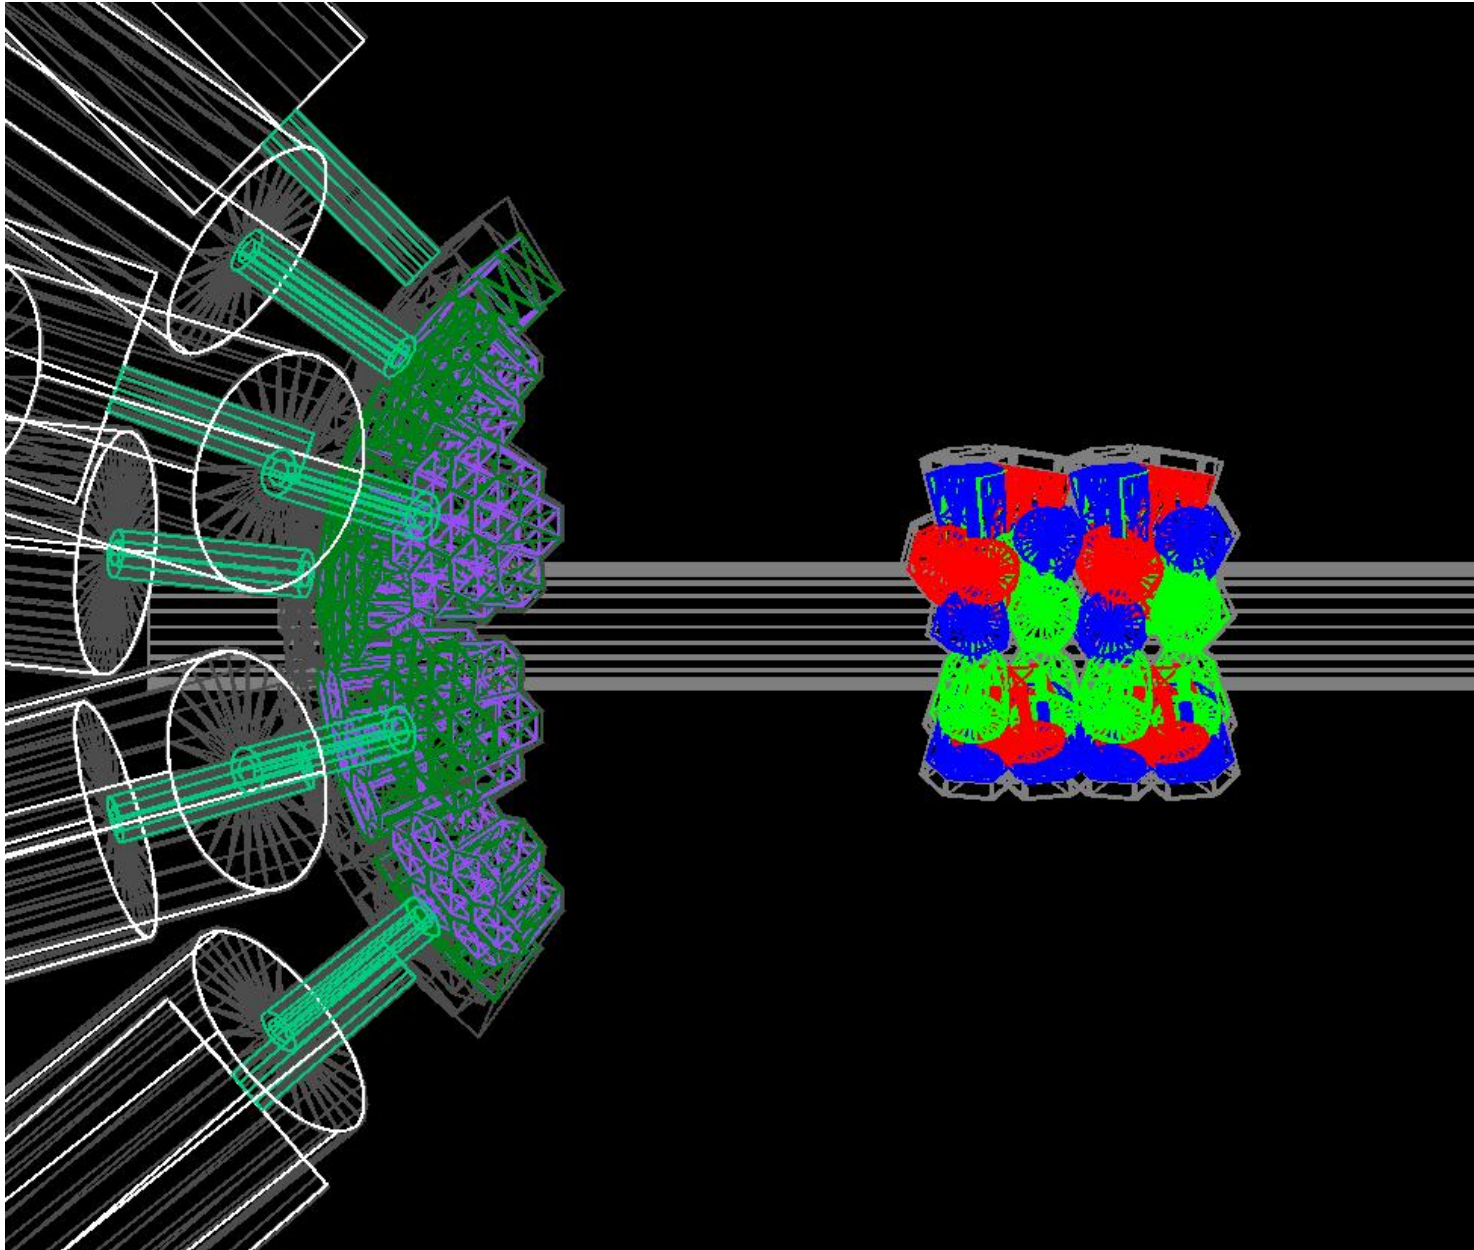


Other viewer's views

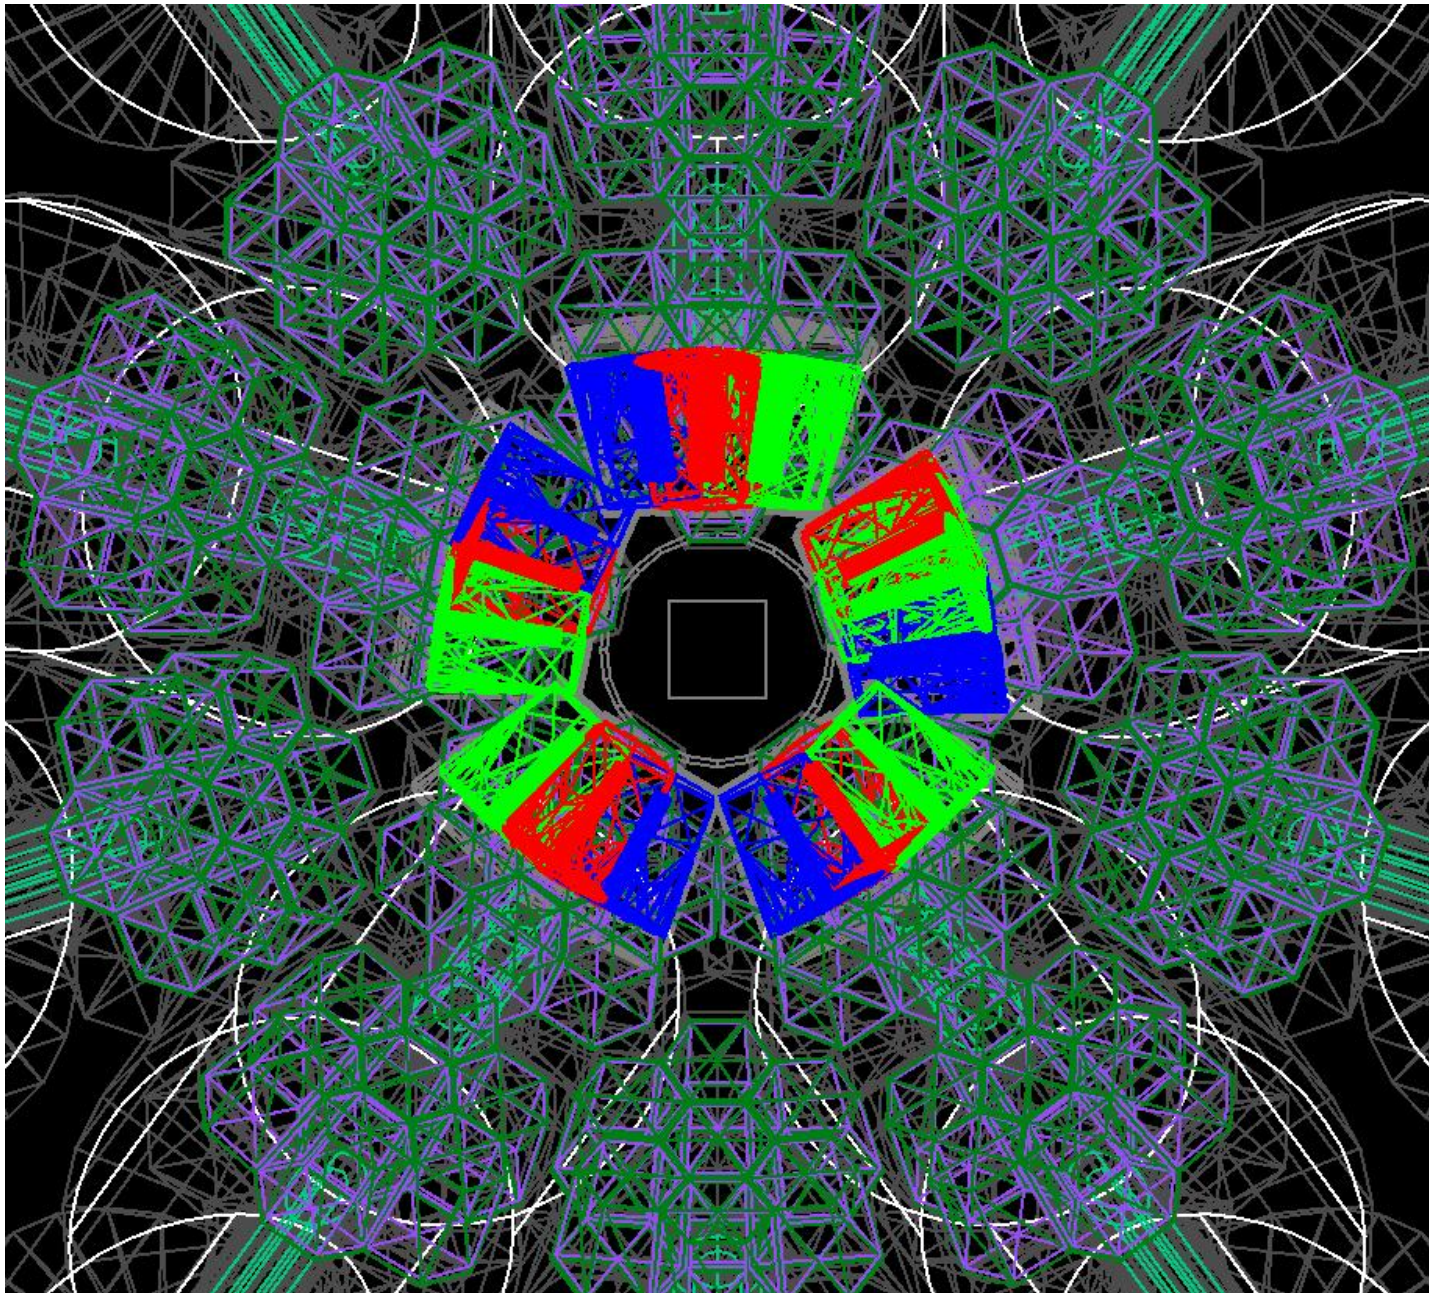


S4 focal plane room constrained by the DSSSD

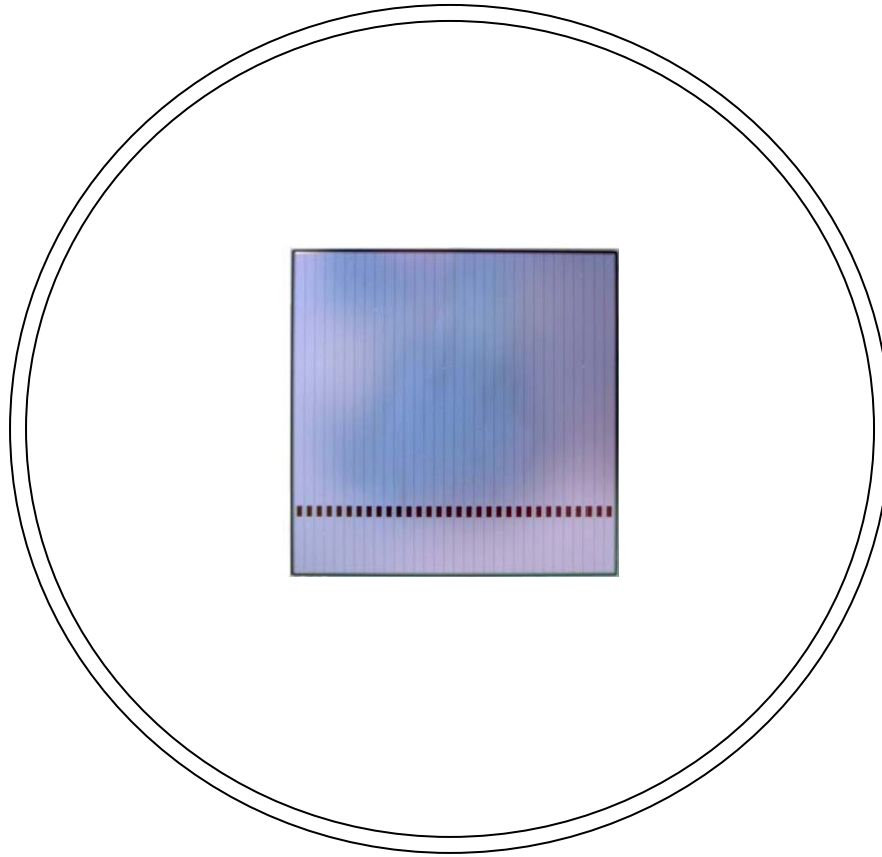


S4 focal plane room constrained by the DSSSD

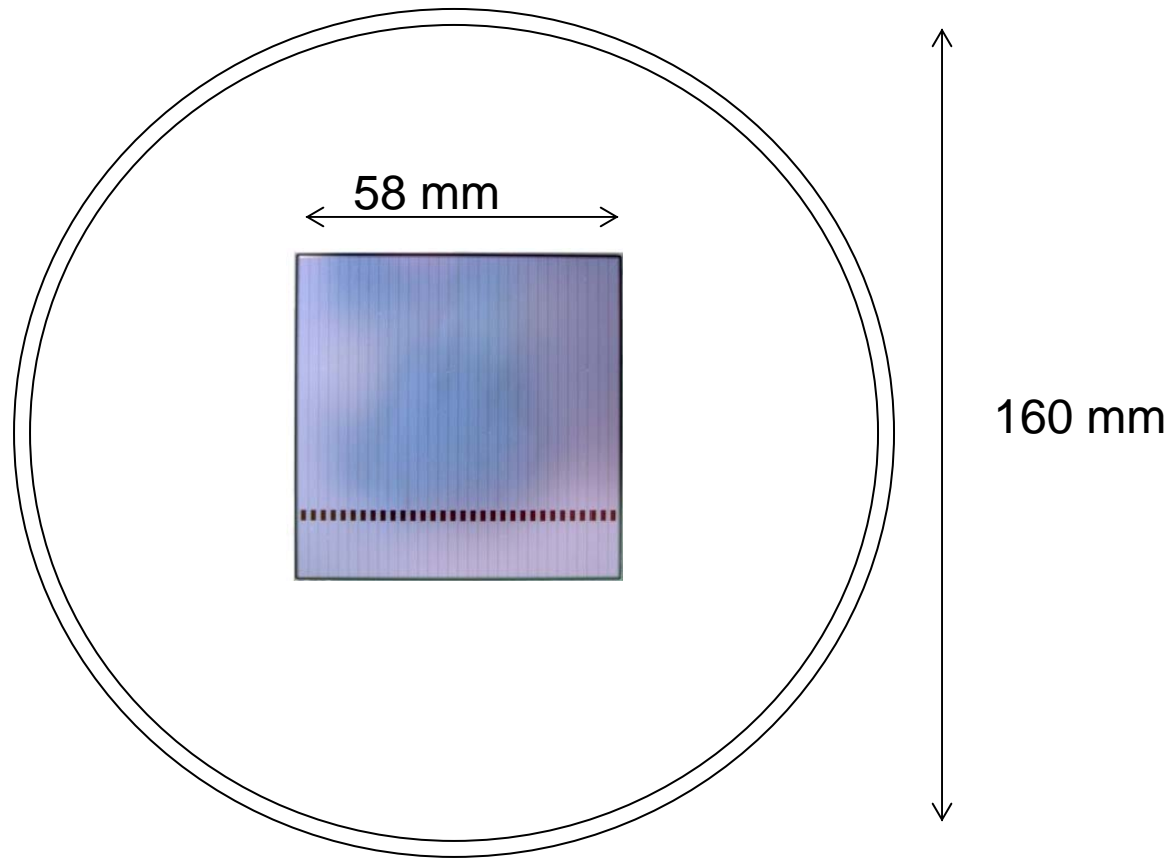


S4 focal plane room constrained by the DSSSD

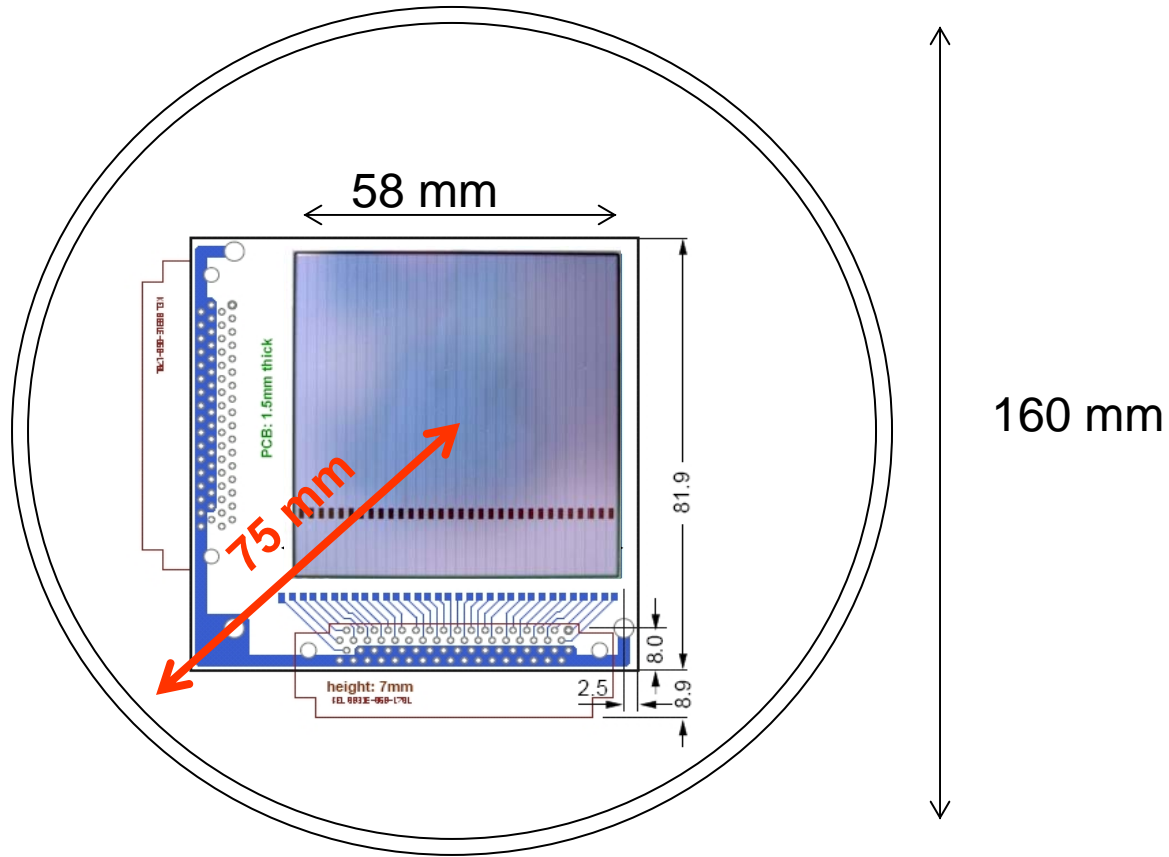

S4 focal plane room constrained by the DSSSD

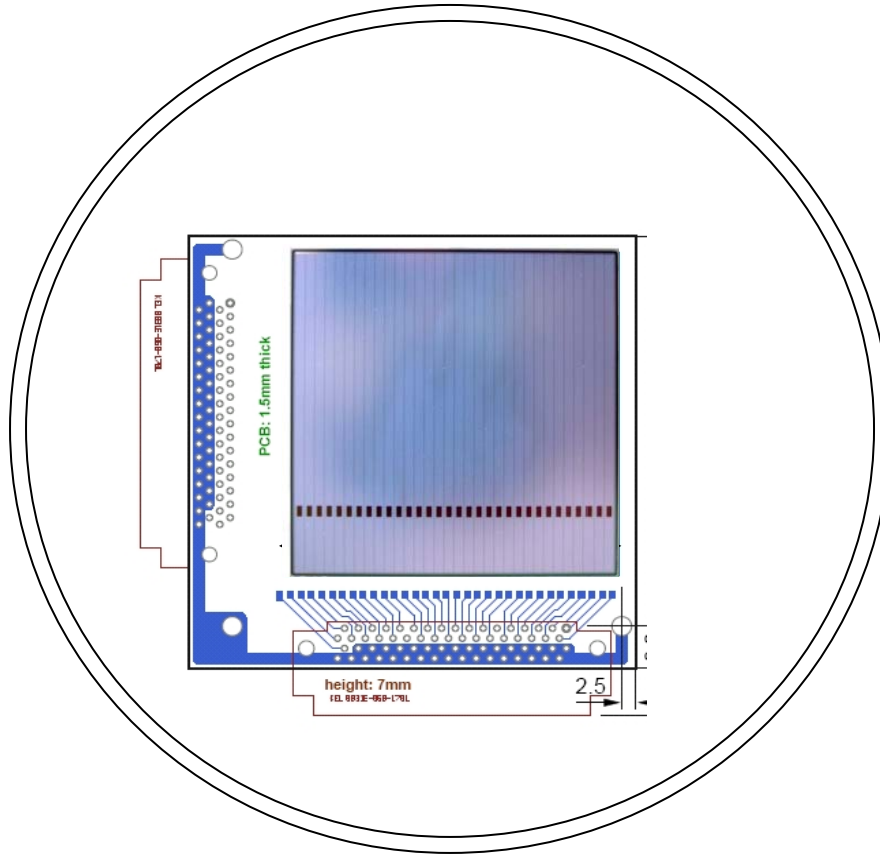


S4 focal plane constrained by the Scintillation membrane

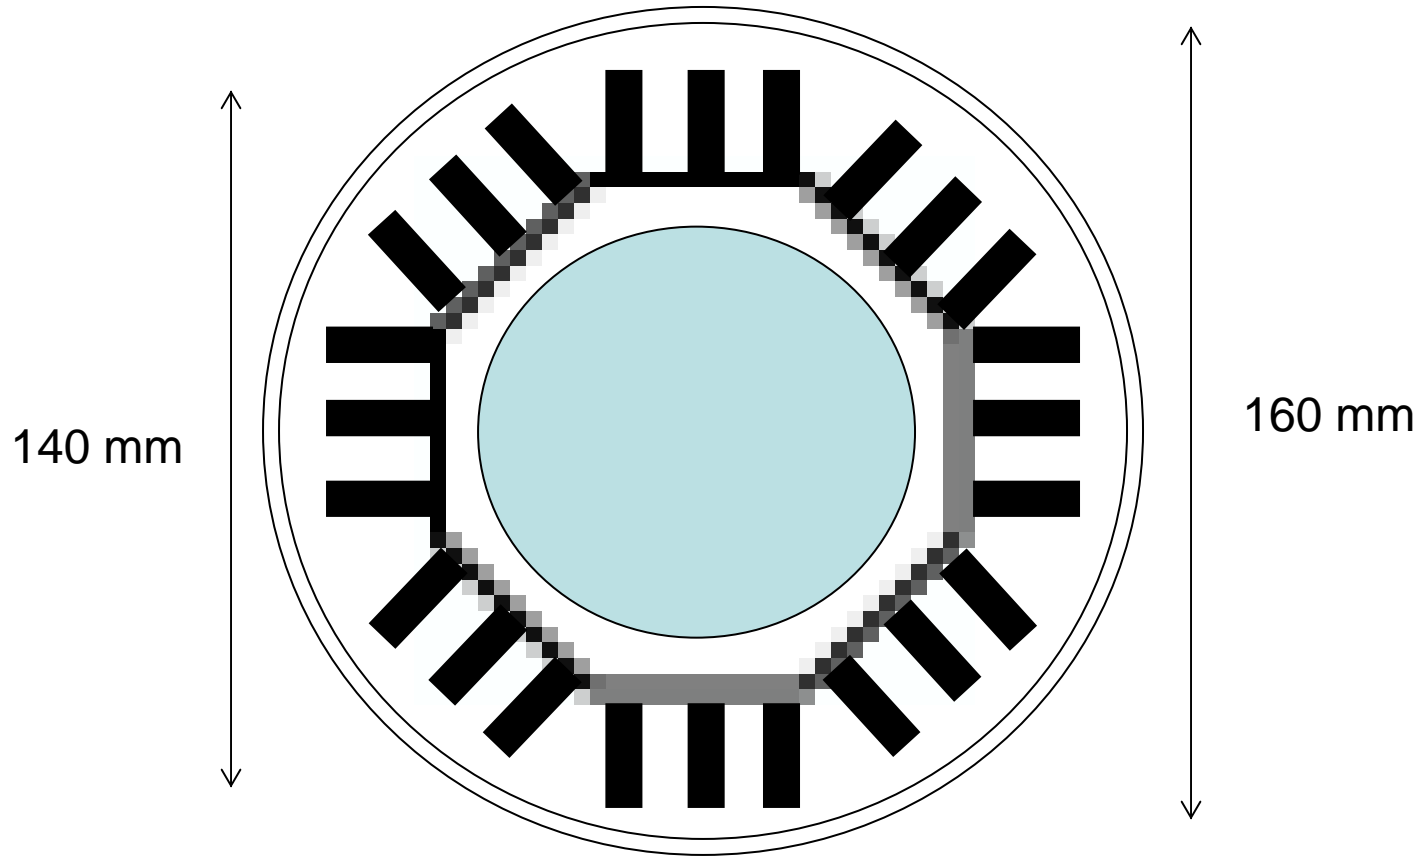


S3- and C2-Geometries + Chamber 20 cm diameter

S3

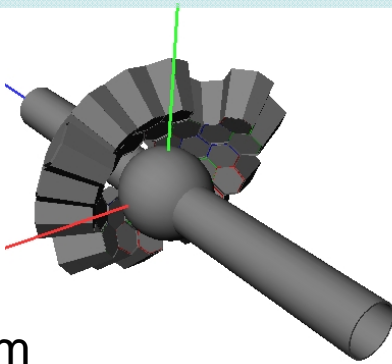


$\Delta d_z = 3 \text{ cm}$

C2

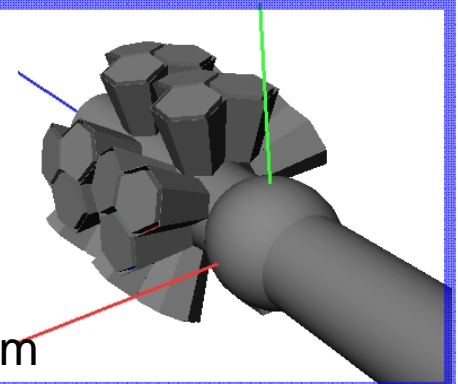


$\Delta d_z = 15 \text{ cm}$

C2 performance could be improved by something like C1

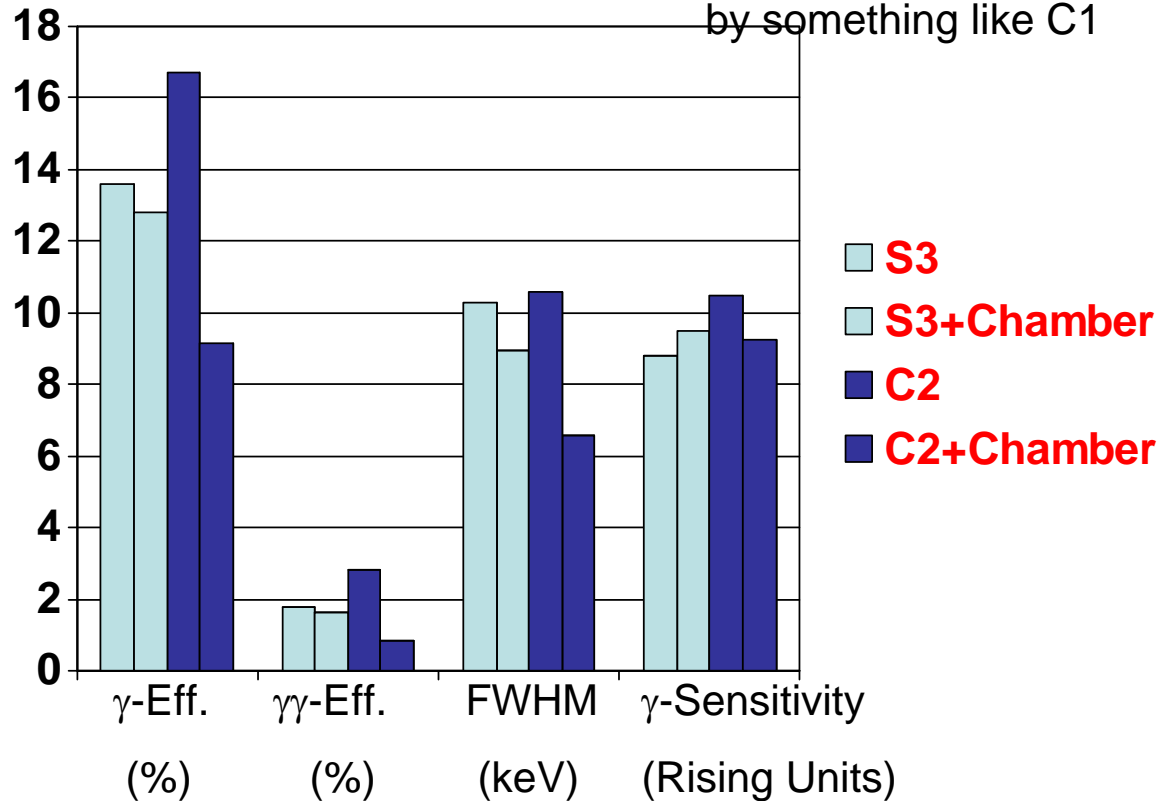


S3- and C2-Geometries + Chamber 20 cm diameter

S3

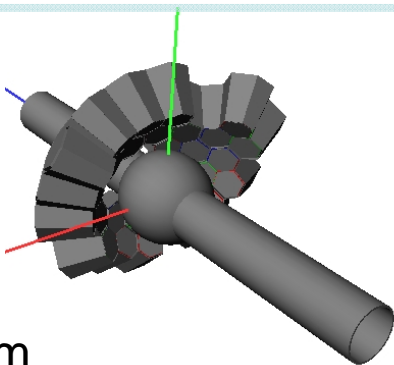

$\Delta d_z = 3 \text{ cm}$



C2

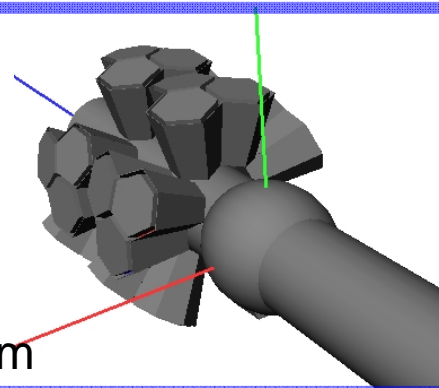

$\Delta d_z = 15 \text{ cm}$

C2 performance could be improved by something like C1

C1

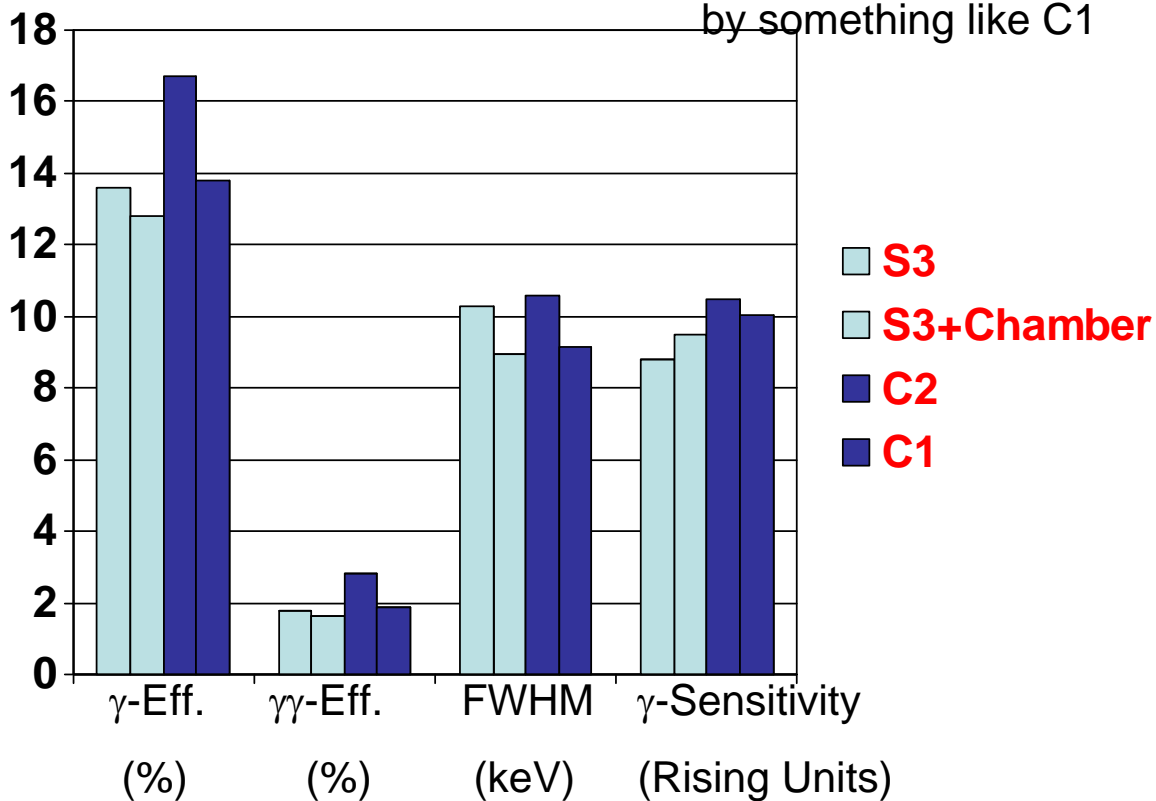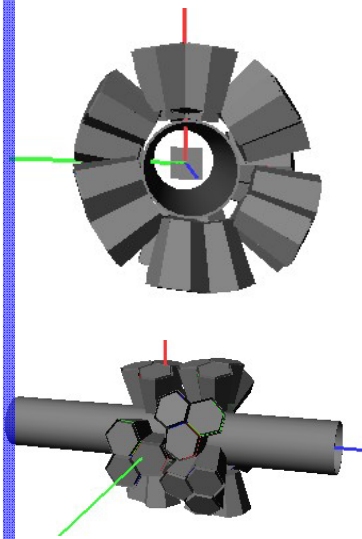

List of Tasks for the Working Group (17.07.2009)

Geometry cases

- Task 1: S2 + 5 Double Cluster detectors closing part of the central hole (15-16cm?). Remains shell with 5 crystals hole + pentagon hole
- Task 2: S3 + 1 Double Cluster detector closing part of the central hole (10-11 cm?). Remains shell with 4 crystals hole + pentagon hole.
- Task 3: previous + 4 Triple Clusters enlarging shell (for case one has 15 Clusters available).
- Task 4: C2 geometry, with clusters in 2nd ring pointing to target, and 3rd ring (15 Clusters total)

Physics cases evaluate realistically the performance of the optimal detection system in:

- Task 1: Coulex experiment. Example: Coulex of ^{104}Sn at 100 MeV/u on a 0.4 g/cm² Au-target. Primary beam ^{124}Xe .
- Task 2: Fragmentation experiment. ^{54}Ni at 100 MeV/u + Be (0.7 g/cm²) -> ^{50}Fe (simulate first 4 excited states up to 8+ level).
- Task 3: Plunger experiment (A. Dewald, Chr. Fransen Uni. Koeln). Emphasis on angular distribution and contribution of RISING at forward angles

Realistic implementation

- Task 1: Background model or scaled background spectra from prev. experiments
- Task 2: Realistic tracking for event reconstruction (mgt, etc)